



DEFENSE INFORMATION SYSTEMS AGENCY

JOINT INTEROPERABILITY TEST COMMAND

P.O. BOX 12798

FORT HUACHUCA, ARIZONA 85670-2798

IN REPLY
REFER TO:

Networks and Transport Division (JTE)

8 Sep 05

MEMORANDUM FOR DISTRIBUTION

SUBJECT: Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

References: (a) DOD Directive 4630.5, "Interoperability and Supportability of Information Technology (IT) and National Security Systems (NSS)," 5 May 2004
(b) CJCSI 6212.01C, "Interoperability and Supportability of Information Technology and National Security Systems," 20 November 2003

1. References (a) and (b) establish the Defense Information Systems Agency (DISA), Joint Interoperability Test Command (JITC), as the responsible organization for interoperability test certification. Additional references are provided in enclosure 1.
2. The Nortel Networks Succession DSN Option 11C Cabinet Digital Switching System with Software Release 3.0 and product enhancement packages, hereinafter referred to as the system under test (SUT), meets all of its critical interoperability requirements. Thus, it is certified as interoperable for joint use within the DSN. The Nortel Networks DSN Option 11C Chassis Digital Switching System employs the same software and trunk/line card hardware as the SUT. JITC analysis determined the DSN Option 11C Chassis Digital Switching System to be functionally identical to the SUT for interoperability certification purposes and it is also certified. The SUT does not offer a Voice over Internet Protocol (VoIP) capability; however, Nortel Networks does offer a VoIP-capable version of the Option 11C called the Succession DSN 1000M Cabinet and it is covered under a separate certification. The identified test discrepancies shown in the Certification Testing Summary (enclosure 2) that remained open after software patches were applied and regression testing was completed have a minor operational impact. The SUT was tested and met the critical interoperability requirements for joint use within the DSN for Private Branch Exchange (PBX) 1 and PBX 2. This certification expires upon changes that could affect interoperability, but no later than three years from the date of this memorandum.
3. This finding is based on interoperability testing conducted by JITC at the Global Information Grid Network Test Facility, Fort Huachuca, Arizona from 20 November 2003 through 4 February 2004. The Special Interoperability Certification Letter and Test Summary Report for this test effort as shown in reference (c) excluded the European Basic Multiplex Rate (E1) Integrated Services Digital Network (ISDN) Primary Rate Interface (PRI), and E1 Channel Associated Signaling (CAS) interfaces. Additional regression testing of product-enhanced packages developed to support the aforementioned interfaces was conducted at JITC

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

from 14 through 25 February 2005 and 2 through 13 May 2005. Enclosure 3 lists the product enhancement packages applied to the SUT for certification. System interoperability should be verified before deployment in an operational environment that varies significantly from the test environment.

4. The interoperability test summary of the SUT is indicated in table 1. The PBX 1 required and conditional Capability Requirements (CRs) and Feature Requirements (FRs) are listed in table 2. The E1 ISDN PRI and E1 CAS interface card nomenclature and product equipment codes are listed in table 3. Network Management (NM) capabilities of the SUT platform were tested in accordance with requirements as set forth in reference (d). This reference requires that a switch provide NM capabilities via Ethernet, serial Electronic Industries Alliance (EIA), or serial (X.25 or BX.25 variant). NM features and functions are not a requirement for a PBX 1; however, the vendor requested that NM be tested and included in this certification. The SUT meets the NM requirements through a serial EIA connection. This interoperability test status is based on the PBX 1's ability to meet:

- a. DSN services for Network and Applications specified in reference (d).
- b. PBX 1 interface and signaling requirements for trunks/lines specified in reference (e) verified through JITC testing and/or vendor submission of Letter(s) of Compliance (LoC).
- c. PBX 1 CRs and FRs specified in reference (e) verified through JITC testing and/or vendor submission of LoC.
- d. The overall system interoperability performance derived from test procedures listed in reference (f).

Table 1. SUT Interoperability Test Summary

DSN Trunk Interfaces			
Interface & Signaling	Critical	Status	Remarks
T1 CAS (DTMF, DP)	No	Certified	Met all CRs and FRs with the following minor exception: Restoral to service from a local red alarm not met. ¹ The operational impact is minor.
E1 CAS (DTMF, DP)	No (Europe only)	Certified	Met all CRs and FRs.
T1 ISDN PRI NI 1/2 (ANSI T1. 619a)	Yes	Certified	Met all CRs and FRs with the following minor exceptions: NI 2 Protocol provides a release complete message in lieu of a disconnect message for unavailable resources. ² The operational impact is minor.
E1 ISDN PRI (ITU-T Q.955.3)	No (Europe only)	Certified	Met all CRs and FRs with the following minor exception: ETSI Protocol provides a release complete message in lieu of a disconnect message for unavailable resources.² The operational impact is minor.
Analog E&M Type 1	No	Not Certified	Analog E&M services are not met. ³ The operational impact is minor.

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 1. SUT Interoperability Test Summary (continued)

DSN Line Interfaces				
Interface & Signaling	Critical	Status	Remarks	
2-Wire Analog (GR-506-CORE)	Yes	Certified	Met all CRs and FRs with the following minor exception: Does not support intraswitch call waiting. ⁴ The operational impact is minor.	
ISDN BRI NI 1/2	Yes	Certified	Met all CRs and FRs.	
Digital Proprietary	No	Certified	Met all CRs and FRs.	
VoIP	No	Not Tested	The SUT solution excludes VoIP.	
Network Gateways				
Interface & Signaling	Critical	Status	Remarks	
PSTN	T1 CAS (DTMF, DP)	No	Certified	Met all CRs and FRs.
	E1 CAS (DTMF, DP)	No (Europe only)	Certified	Met all CRs and FRs.
	T1 ISDN PRI NI2	No	Certified	Met all CRs and FRs.
	E1 ISDN PRI (ITU-T Q.931)	No (Europe only)	Certified	Met all CRs and FRs.
DSN Features and Capabilities				
Features and Capabilities	Critical	Status	Remarks	
Common Features	No	Certified	Met all Common Features.	
Attendant	No	Certified	Met all CRs and FRs except attendant services automatic recall. ⁵ The operational impact is minor.	
Public Safety	No	Not Tested	This feature is not offered by the SUT.	
Preset Conferencing	No	Not Tested	This feature is not offered by the SUT.	
Nailed-up Connections	No	Not Tested	This feature is not offered by the SUT.	
PAT	No	Not Tested	This feature is not offered by the SUT.	
DSN Hotline services	No	Not Certified	Hotline services are not met. ⁶ The operational impact is minor.	
Network Management	No	Certified	Met all CRs and FRs.	
ISDN services (EKTS)	No	Not Tested		
Synchronization	Yes	Certified	Met all CRs and FRs.	
Reliability	Yes	Certified	Met all CRs and FRs.	
Security	Yes	See note 7.		
VoIP System	No	Not Tested	This feature is not offered by the SUT.	
VoIP LANs	No	Not Tested	This feature is not offered by the SUT.	
LEGEND:				
ANSI - American National Standards Institute BRI - Basic Rate Interface CAS - Channel Associated Signaling CRs - Capability Requirements DP - Dial Pulse DSN - Defense Switched Network DTMF - Dual Tone Multi-Frequency E&M - Ear and Mouth E1 - European Basic Multiplex Rate (2,048 Mbps) EKTS - Electronic Key Telephone System ETSI - European Telecommunications Standards Institute FRs - Feature Requirements GR - Generic Requirement (Telcordia) GSCR - Generic Switching Center Requirements IATP - Information Assurance Test Plan ISDN - Integrated Services Digital Network ITU-T - International Telecommunication Union - Telecommunication Standardization Sector JITC - Joint Interoperability Test Command LAN - Local Area Network LoC - Letters of Compliance Mbps - Megabits per second MLPP - Multi-Level Precedence Preemption NI 1/2 - National ISDN 1 or 2 PAT - Precedence Access Threshold PRI - Primary Rate Interface PSTN - Public Switched Telephone Network Q.931 - Signaling standard for ISDN Q.955.3 - ISDN Signaling standard for E1 MLPP SS7 - Signaling System 7 SUT - System Under Test T1 - Digital Transmission Link Level 1 (1.544 Mbps) T1.619a - SS7 and ISDN signaling standard for T1 VoIP - Voice over Internet Protocol				
NOTES:				
1 The SUT does not meet the GSCR capability requirements for restoral to service from a local red alarm. The SUT takes 30 seconds to recover versus the required 15 seconds. 2 ISDN T1 PRI trunkgroups using NI 2 and ISDN E1 PRI trunk groups using ETSI protocol send a release complete message in lieu of a disconnect message with Cause 46 (unavailable resources). 3 Analog E&M Signaling Type 1 did not pass the DSN preempt signals as required by the GSCR for the four types of preemption. Analog E&M Signaling Type 1 is not certified for use in the DSN. Analog E&M signaling is not a critical requirement. 4 Analog instruments do not provide intra-switch call waiting. 5 The SUT's attendant console does not support automatic recall of attendant. 6 The SUT does not meet the GSCR capability requirements for hotline services. Hotline services are not a critical requirement. 7 JITC verifies security via vendor LoC. Further testing in accordance with the IATP is required prior to being authorized connection approval. This testing is done by Defense Information Systems Agency Information Assurance test teams and published in a separate report.				

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 2. PBX 1 Requirements

DSN Trunk Interfaces				
Digital Interface	Critical	Requirements Required (R) or Conditional (C)		References
T1 CAS	No	Trunking	<ul style="list-style-type: none"> Framing (R) Line Code (R) Signaling (R) Alarms (R) WWNDP (R) Outpulsing digit formats (C: CAS only) Routing (C) Trunk Groups (C) Call Processing (C) CAS to CCS trunk interworking (C) PCM-24/PCM-30 Interoperation (C) Direct Inward Dialing (C) 	<ul style="list-style-type: none"> GSCR Sect. 7 GSCR Sect. 7 GSCR Sect. 5 GSCR Sect. 2.5.7, 7.1.4 and 7.2.2 GSCR Sect. 4.5.1 GSCR Sect. 4.5.2 GSCR Sect. 4.2 GSCR Sect. 2.5.5 and 2.5.6 GSCR Sect. 4 GSCR Sect. 3.10 GSCR Sect. 7.3 GSCR Sect. 2.3.2
E1 CAS	No (Europe only)		Voice	<ul style="list-style-type: none"> MOS (R) MLPP (R) Secure calls (R)
T1 ISDN PRI NI 1/2 (ANSI T1.619a)	Yes	Facsimile	<ul style="list-style-type: none"> Analog: EIA/TIA-465-A (R) Digital: MIL-STD-188-161D (C) 	<ul style="list-style-type: none"> DISR DISR
E1 ISDN PRI (ITU-T Q955.3)	No (Europe only)	Data	<ul style="list-style-type: none"> Modem (VBD) (R) 56-kbps switched data (R: ISDN PRI only) 64-kbps switched data (R: ISDN PRI only) NX56 synchronous BER (R: ISDN PRI only) NX64 synchronous BER (R: ISDN PRI only) Secure data (STE/STU-III) (R) 	<ul style="list-style-type: none"> CJCSI 6215.01B GSCR Sect. 3.10 GSCR Sect. 3.10 GSCR Sect. 3.10 GSCR Sect. 3.10 CJCSI 6215.01B
		VTC	<ul style="list-style-type: none"> ITU-T H.320 (R: ISDN PRI only) 	<ul style="list-style-type: none"> DISR
Analog Interface	Critical	Requirements Required (R) or Conditional (C)		References
Analog E&M Type 1	No	Trunking	<ul style="list-style-type: none"> WWNDP (R) Routing (C) Call Processing (C) Direct Inward Dialing (C) 	<ul style="list-style-type: none"> GSCR Sect. 4.5.1 GSCR Sect. 4.2 GSCR Sect. 4 GSCR Sect. 2.3.2
		Voice	<ul style="list-style-type: none"> MOS (R) MLPP (R) Secure calls (R) 	<ul style="list-style-type: none"> CJCSI 6215.01B CJCSI 6215.01B CJCSI 6215.01B
		Facsimile	<ul style="list-style-type: none"> Analog: EIA/TIA-465-A (R) Digital: MIL-STD-188-161D (C) 	<ul style="list-style-type: none"> DISR DISR
		Data	<ul style="list-style-type: none"> Secure data (STE/STU-III) (R) 	<ul style="list-style-type: none"> CJCSI 6215.01B
DSN Line Interfaces				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
2-Wire Analog	Yes	Access	<ul style="list-style-type: none"> DN Identification (R) Line signaling (R) Alerting Signals and Tones (R) WWNDP (R) Call Treatments (R) 2W user access (R: 2-Wire Analog only) Analog busy/idle (R: 2-Wire Analog only) 	<ul style="list-style-type: none"> GSCR Sect. 2.1.1 GSCR Sect. 5.2 GSCR Sect. 5.5 GSCR Sect. 4.5 GSCR Sect. 4.1 GSCR Sect. 4.3.3 GSCR Sect. 4.3.4.1
ISDN BRI NI 1/2	No		Voice	<ul style="list-style-type: none"> MOS (R) Announcements (R) MLPP (R) Secure Calls (R) (ISDN BRI and Analog only)
2-Wire Digital	No	Facsimile	<ul style="list-style-type: none"> Analog: EIA/TIA-465-A (R) Digital: MIL-STD-188-161D (C) (ISDN BRI only) 	<ul style="list-style-type: none"> DISR DISR
VoIP	No			

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 2. PBX 1 Requirements (continued)

DSN Line Interfaces				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
2-Wire Analog	Yes	Data	<ul style="list-style-type: none"> • Modem (VBD) (R) (Analog only) • 56-kbps switched data (R: ISDN BRI only) • 64-kbps switched data (R: ISDN BRI only) • NX56 synchronous BER (R:ISDN BRI only) • NX64 synchronous BER (R: ISDN BRI only) • Secure data (STE/STU-III) (R) (ISDN BRI and Analog only) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • CJCSI 6215.01B
ISDN BRI NI 1/2	No			
2-Wire Digital	No			
VoIP	No			
DSN Features & Capabilities				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
Common Features	No	<ul style="list-style-type: none"> • Selective call rejection (C) • Denied originating service (C) • Code restriction and diversion (C) • Call waiting (C) • Three-way calling (C) • Add-on transfer and conference calling (C) • Call forwarding (C) • Call pick-up (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.1.2 • GSCR Sect. 2.1.3 • GSCR Sect. 2.1.4 • GSCR Sect. 2.1.5 • GSCR Sect. 2.1.6 • GSCR Sect. 2.1.7 • GSCR Sect. 2.1.8 • GSCR Sect. 2.1.9
Attendant	No	<ul style="list-style-type: none"> • Initiate all precedence levels (C) • Visual display (C) • Override class of service (C) • Override busy line (C) • Call deflection (C) • Auto recall (C) • Waiting queue (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.2.1 • GSCR Sect. 2.2.2 • GSCR Sect. 2.2.3 • GSCR Sect. 2.2.4 • GSCR Sect. 2.2.5 • GSCR Sect. 2.2.6 • GSCR Sect. 2.2.7
Public Safety	No	<ul style="list-style-type: none"> • 911 (C) • Trace of terminating calls (C) • Outgoing call trace (C) • Tandem call trace (C) • Trace of a call in progress (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.4.1 • GSCR Sect. 2.4.2 • GSCR Sect. 2.4.3 • GSCR Sect. 2.4.4 • GSCR Sect. 2.4.5
Preset Conferencing	No	<ul style="list-style-type: none"> • Support 10 bridges; 1 originator and 20 conferees (C) • Assign up to 20 address numbers per bridge (C) • Use KXX codes for bridge access (C) • Conference notification recorded announcement (C) • Auto retrieval and alternate address (C) • Bridge release (C) • Lost connection (C) • Secondary conferencing (C) • Address translation (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.6 • GSCR Sect. 2.6 • GSCR Sect. 2.6 • GSCR Sect. 2.6.1 • GSCR Sect. 2.6.2 • GSCR Sect. 2.6.3 • GSCR Sect. 2.6.4 • GSCR Sect. 2.6.5 • GSCR Sect. 2.7
Nailed-up Connections	No	<ul style="list-style-type: none"> • Between any two like terminations (C) • PCM-24 and PCM-30, both CAS and CCS (C) • Supervision passed end-to-end for A/D or D/A (C) • Monitored and auto reconfigure (C) • Support at least 10% of circuits as nailed-up (C) • Non-preemptable (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.8

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 2. PBX 1 Requirements (continued)

DSN Features & Capabilities			
Interface	Critical	Requirements Required (R) or Conditional (C)	References
PAT	No	<ul style="list-style-type: none"> • Classmark for/not for PAT screening (C) • 7 PAT mechanisms (C) • Outgoing call screening (C) • Functional structure (C) • Simultaneous calls limitation (C) • Overflow process (C) • Decrementing call-in-progress count (C) • Call treatment (C) • Queuing (C) • Attendant calls (C) • Operation measurement registers (C) • Maintenance and administration of thresholds (C) 	<ul style="list-style-type: none"> • GSCR Sect. 2.11.1 • GSCR Sect. 2.11.1 • GSCR Sect. 2.11.1.1 • GSCR Sect. 2.11.1.2 • GSCR Sect. 2.11.1.3 • GSCR Sect. 2.11.1.4 • GSCR Sect. 2.11.1.5 • GSCR Sect. 2.11.1.6 • GSCR Sect. 2.11.1.7 • GSCR Sect. 2.11.1.8 • GSCR Sect. 2.11.1.9 • GSCR Sect. 2.11.1.10
DSN Hotline services	No	<ul style="list-style-type: none"> • Hotline restrictions (C) • Auto initiate (C) • Analog and digital (C) • Subscription basis (C) • Protected hotline calling (C) • WWNDP interoperable (C) 	<ul style="list-style-type: none"> • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12.1-4 • GSCR Sect. 2.12.5
Network Management	No	<ul style="list-style-type: none"> • Interfaces (C) • Measurements and data generation (C) • Fault management (C) • Configuration management (C) • Accounting management (C) • Performance management (C) • NM controls (C) • Remote access (C) 	<ul style="list-style-type: none"> • GSCR Sect. 9.1 • GSCR Sect. 9.2 • GSCR Sect. 9.3 • GSCR Sect. 9.4 • GSCR Sect. 9.5 • GSCR Sect. 9.6 • GSCR Sect. 9.7 • GSCR Sect. 9.8
ISDN services	No	<ul style="list-style-type: none"> • EKTS (C) 	<ul style="list-style-type: none"> • GSCR Sect. 10, table 10-3
Synchronization	Yes	<ul style="list-style-type: none"> • Line timing mode (R) • Internal Stratum 4 (R) 	<ul style="list-style-type: none"> • GSCR Sect. 11.1.1.2 • GSCR Sect. 11.1.2.2
Reliability	Yes	<ul style="list-style-type: none"> • GR-512-CORE (R) 	<ul style="list-style-type: none"> • GSCR Sect. 12.2
Security ¹	Yes	<ul style="list-style-type: none"> • DITSCAP (R) 	<ul style="list-style-type: none"> • GSCR Sect. 13
DSN Features & Capabilities			
Interface	Critical	Requirements Required (R) or Conditional (C)	References
VoIP			
VoIP System	No	<p>VoIP function is conditional. If VoIP is provided, all of the following requirements must be met:</p> <ul style="list-style-type: none"> • MOS 4.0 or better • ITU-T G.711 PCM codec • Security in accordance with DITSCAP • NM • Line Timing • Internal clock • Latency ≥ 60 msec • IPv6 capable 	<ul style="list-style-type: none"> • GSCR App. 3

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 2. PBX 1 Requirements (continued)

DSN Features & Capabilities				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
VoIP				
LANs	No	VoIP function is conditional. If VoIP is provided, all of the following requirements must be met: <ul style="list-style-type: none"> • LAN parameters • CoS/QoS • .99999 availability • Modular devices • VLAN support • NM and voice in different VLAN • IEEE standards conformance • 2 second link restoral • LAN NM • Traffic Engineering 		<ul style="list-style-type: none"> • GSCR App. 3
Network Gateways				
Gateway	Critical	Requirements Required (R) or Conditional (C)		References
PSTN	No	Trunking	<ul style="list-style-type: none"> • Positive Identification Control (C) • On-Netting (C) • Off Netting (C) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • CJCSI 6215.01B • CJCSI 6215.01B
LEGEND: 2W - 2-Wire 911 - 911 Emergency Service A/D - Analog to Digital ANSI - American National Standards Institute App - Appendix BER - Bit Error Ratio BRI - Basic Rate Interface CAS - Channel Associated Signaling CCS - Common Channel Signaling CJCSI - Chairman of the Joint Chiefs of Staff Instruction CoS - Class of Service D/A - Digital to Analog DISA - Defense Information Systems Agency DISR - Department of Defense Information Technology Standards Registry DITSCAP - Department of Defense Information Technology Security Certification and Accreditation Process DN - Directory Number DSN - Defense Switched Network E&M - Ear and Mouth E1 - European Basic Multiplex Rate (2.048 Mbps) EIA - Electronic Industries Alliance EIA-465 - Group 3 Facsimile Apparatus for Document Transmission EKTS - Electronic Key Telephone System GR - Generic Requirement (Telcordia) GSCR - Generic Switching Center Requirements H.320 - Standard for narrowband VTC IATP - Information Assurance Test Plan IEEE - Institute of Electrical and Electronics Engineers, Inc. IPv6 - Internet Protocol version 6 ISDN - Integrated Services Digital Network ITU-T - International Telecommunication Union – Telecommunication Standardization Sector JITC - Joint Interoperability Test Command kbps - kilobits per second KXX - K= any number 2-8; X= any number 1-9 LAN - Local Area Network LoC - Letter(s) of Compliance Mbps - Megabits per second MIL-STD - Military Standard MLPP - Multi-Level Precedence and Preemption MOS - Mean Opinion Score msec - millisecond NI 1/2 - National ISDN 1 or 2 NM - Network Management NX56 - Data format restricted to multiples of 56 kbps NX64 - Data format restricted to multiples of 64 kbps PAT - Precedence Access Threshold PBX - Private Branch Exchange PCM - Pulse Code Modulation PCM-24 - Pulse Code Modulation - 24 Channels PCM-30 - Pulse Code Modulation - 30 Channels PRI - Primary Rate Interface PSTN - Public Switched Telephone Network Q.955.3 - ISDN Signaling Standard for E1 MLPP QoS - Quality of Service Sect. - section SS7 - Signaling System 7 STE - Secure Terminal Equipment STU-III - Secure Telephone Unit-3 rd generation T1 - Digital Transmission Link Level 1 (1.544 Mbps) T1.619a - SS7 and ISDN MLPP Signaling Standard for T1 TIA - Telecommunications Industry Association VBD - Variable bit data VLAN - Virtual Local Area Network VoIP - Voice over Internet Protocol VTC - Video Teleconferencing WWNDP - Worldwide Numbering and Dialing Plan				
NOTE: JITC verifies security via an LoC. DITSCAP information assurance testing is accomplished via DISA-led Information Assurance test teams and published in a separate report.				

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Table 3. SUT Product Enhancement Packages

Core Software Patch List		
Patch ID Number	CR Number	Description
MPLR17817	Q00758895	DSN: Tandem ATVN MCDN trunk 2nd call fails after preemption
MPLR18070	Q00786849	Preemption of a partially dialed routine precedence call
MPLR18220	Q00802114	DSN: Bug 30 messages during Tandem calls
MPLR18263	Q00817316	Option 11C switch reinitializes due to CDR-Q procedure
MPLR18302	Q00841477	NI2 DID Tandem to ATVN
MPLR18622	Q00888789	This patch was developed to suppress password information on the switches in LD 22.
MPLR18870 Issue 3	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
MPLR20223 Issue 1	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
MPLR 20305 Issue	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
LEGEND: ATVN - Autovon CAS - Channel Associated Signaling CDR-Q - Call Detail Recording-Queue CR - Call Report DID - Direct Inward Dial DSN - Defense Switched Network E1 - European Basic Multiplex Rate (2.048 Mbps) ID - Identification ISDN - Integrated Services Digital Network LD - Overlay Mbps - Megabits per second MCDN - Meridian Customer Defined Network MPLR - Meridian Patch Library Reference NA - Not Applicable NI2 - National ISDN 2 PRI - Primary Rate Interface SUT - System Under Test		
NOTE: This certification specifically covers regression testing of newly product enhancement packages in bold . The other packages were tested and covered under a certification letter that was signed on 16 July 2004.		

5. JITC distributes interoperability information via the JITC Electronic Report Distribution (ERD) system, which uses Unclassified-But-Sensitive Internet Protocol Router Network (NIPRNet) e-mail. More comprehensive interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/gov users on the NIPRNet at <https://stp.fhu.disa.mil>. Test reports, lessons learned, and related testing documents and references are on the JITC Joint Interoperability Tool (JIT) at <http://jit.fhu.disa.mil> (NIPRNet), or <http://199.208.204.125> (SIPRNet). Information related to DSN testing is on the Telecom Switched Services Interoperability (TSSI) website at <http://jitc.fhu.disa.mil/tssi>.

6. The JITC point of contact is Mr. John Hooper, DSN 879-5041, commercial (520) 538-5041, FAX DSN 879-4347, or e-mail to John.Hooper@disa.mil.

FOR THE COMMANDER:



RICHARD A. MEADOR
 Chief
 Networks and Transport Division

3 Enclosures a/s

JITC Memo, JTE, Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages

Distribution:

Joint Staff J6I, Room-1E565, Pentagon, Washington, DC 20318-6000

Joint Interoperability Test Command, Washington Operations Division, NSWC, ATTN: JT1, Building 900, 101 Strauss Avenue, Indian Head, MD 20640-5035

Defense Information Systems Agency, GIG Enterprise Services Engineering Directorate, NETCENTRICITY, REQUIREMENTS, ANALYSIS & ASSESSMENTS BRANCH, ATTN: GE333, Rm. 244, 5600 Columbia Pike, Falls Church, VA 22041-2770

Defense Information Systems Agency, GIG-Combat Support Directorate, DSN SYSTEMS MANAGEMENT BRANCH, ATTN: GS235, Rm. 5W248A, 5275 Leesburg Pike, Falls Church, VA 22041

Office of Chief of Naval Operations (N61C22), CNON6/7, 2000 Navy Pentagon, Washington, DC 20350

Headquarters US Air Force, AF/XICC, 1250 Pentagon, Washington, DC 20330-1250

Department of the Army, Office of the Secretary of the Army, G-6/ASA (ALT), ATTN: ASAALT (SAAL-SSI), 103 Army Pentagon, Washington, DC 20310-0103

US Marine Corps (C4ISR), MARCORSSYSCOM, 2200 Lester Street, Quantico, VA 22134

DOT&E, Strategic and C3I Systems, 1700 Defense Pentagon, Washington, DC 20301-1700

US Coast Guard, COMDT/G-SCE (C4), 2100 2nd Street SW, Washington, DC 20593

Office of Assistant Secretary of Defense, OASD(NII)/DoD CIO, Crystal Mall 3, 7th Floor, Suite 700, 1931 Jefferson-Davis Hwy, Arlington, VA 22202

Office of Under Secretary of Defense, OUSD(AT&L), Room 3E144, 3070 Defense Pentagon, Washington, DC 20301

US Joint Forces Command, J6I, C4 Plans and Policy, 1562 Mitscher Ave, Norfolk, VA 23551-2488

Defense Intelligence Agency, ATTN: DS-CIO, Bldg 6000, Bolling AFB, Washington, DC 20340-3342

National Security Agency, ATTN: DT, Suite 6496, 9800 Savage Road, Fort Meade, MD 20755-6496

Commander, Defense Information Systems Agency (DISA), ATTN: GS23 (Mr. Osman), Room 5w23, 5275 Leesburg Pike (RTE 7), Falls Church, VA 22041

ADDITIONAL REFERENCES

- (c) Special Interoperability Test Certification of Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet and Option 11C Chassis Digital Switching Systems with Software Release 3.0 and Product Enhancement Packages,” 16 July 2004
- (d) Chairman of the Joint Chiefs of Staff Instruction (CJCSI) 6215.01B, “Policy for Department of Defense Voice Services,” 23 September 2001
- (e) Defense Information Systems Agency (DISA), “Defense Switched Network (DSN) Generic Switching Center Requirements (GSCR),” 8 September 2003
- (f) Joint Interoperability Test Command, Draft, “Defense Switched Network Generic Switch Test Plan (GSTP),” 19 June 1999

CERTIFICATION TESTING SUMMARY

- 1. SYSTEM TITLE.** Nortel Networks Succession Defense Switched Network (DSN) Option 11C Cabinet Digital Switching System with Software Release 3.0 and Product Enhancement Packages, hereinafter referred to as the system under test (SUT).
- 2. PROPONENT.** Defense Information Systems Agency (DISA).
- 3. PROGRAM MANAGER.** Mr. Howard Osman, GS23, Room 5W23, 5275 Leesburg Pike, Falls Church, VA 22041, E-mail: Howard.Osman@disa.mil.
- 4. TESTER.** Joint Interoperability Test Command (JITC), Fort Huachuca, Arizona.
- 5. SYSTEM UNDER TEST DESCRIPTION.** Private Branch Exchanges (PBXs) are Military Department (MILDEP)-controlled elements of the DSN. The SUT telephone system supports up to 1000 lines. The SUT supports the same desktop and system features as the larger Nortel Networks Succession DSN switching systems including digital telephones, in-building wireless communications, voice messaging, call center, Personal Computer-based system management, and multimedia applications. The SUT can be configured for a single site or provide multi-location Integrated Services Digital Network (ISDN) private networking. The SUT's modular design allows the addition of capacity and new capabilities on an "as needed" basis. Nortel Network's DSN Option 11C Chassis Digital Switching System is based on the SUT platform. The DSN Option 11C Chassis Digital Switching System was designed to serve branch offices with 80 lines or less. It provides the full range of Nortel Networks Succession DSN Digital Switching System features and uses the same telephones software and trunk/line card hardware as the SUT. The SUT and DSN Option 11C Chassis Digital Switching System are currently in use within the DSN providing PBX 1 switch functionality. JITC analysis determined the DSN Option 11C Chassis Digital Switching System to be functionally identical to the SUT for interoperability certification purposes and is certified for joint use within the DSN. The SUT also offers a Voice over Internet Protocol capability; however, this capability is not covered under this certification. Previous testing documented in reference (c) excluded the European Basic Multiplex Rate (E1) Integrated Services Digital Network (ISDN) Primary Rate Interface (PRI) and E1 Channel Associated Signaling (CAS) interfaces. This certification covers the regression testing of product-enhanced packages developed to support the E1 ISDN PRI and E1 CAS interfaces. Enclosure 3 lists the product enhancement packages applied to the SUT for certification.
- 6. OPERATIONAL ARCHITECTURE.** The DSN architecture is a two-level network hierarchy consisting of DSN backbone switches and Military/Agency installation switches. Joint Staff policy and subscriber mission requirements determine which type of switch can be used at a particular location. The DSN architecture consists of several categories of switches including PBXs. The Generic Switching Center Requirements (GSCR) operational DSN Architecture is depicted in figure 2-1. The architecture depicts the relationship of MILDEP PBX 1s to the rest of the DSN switch types.

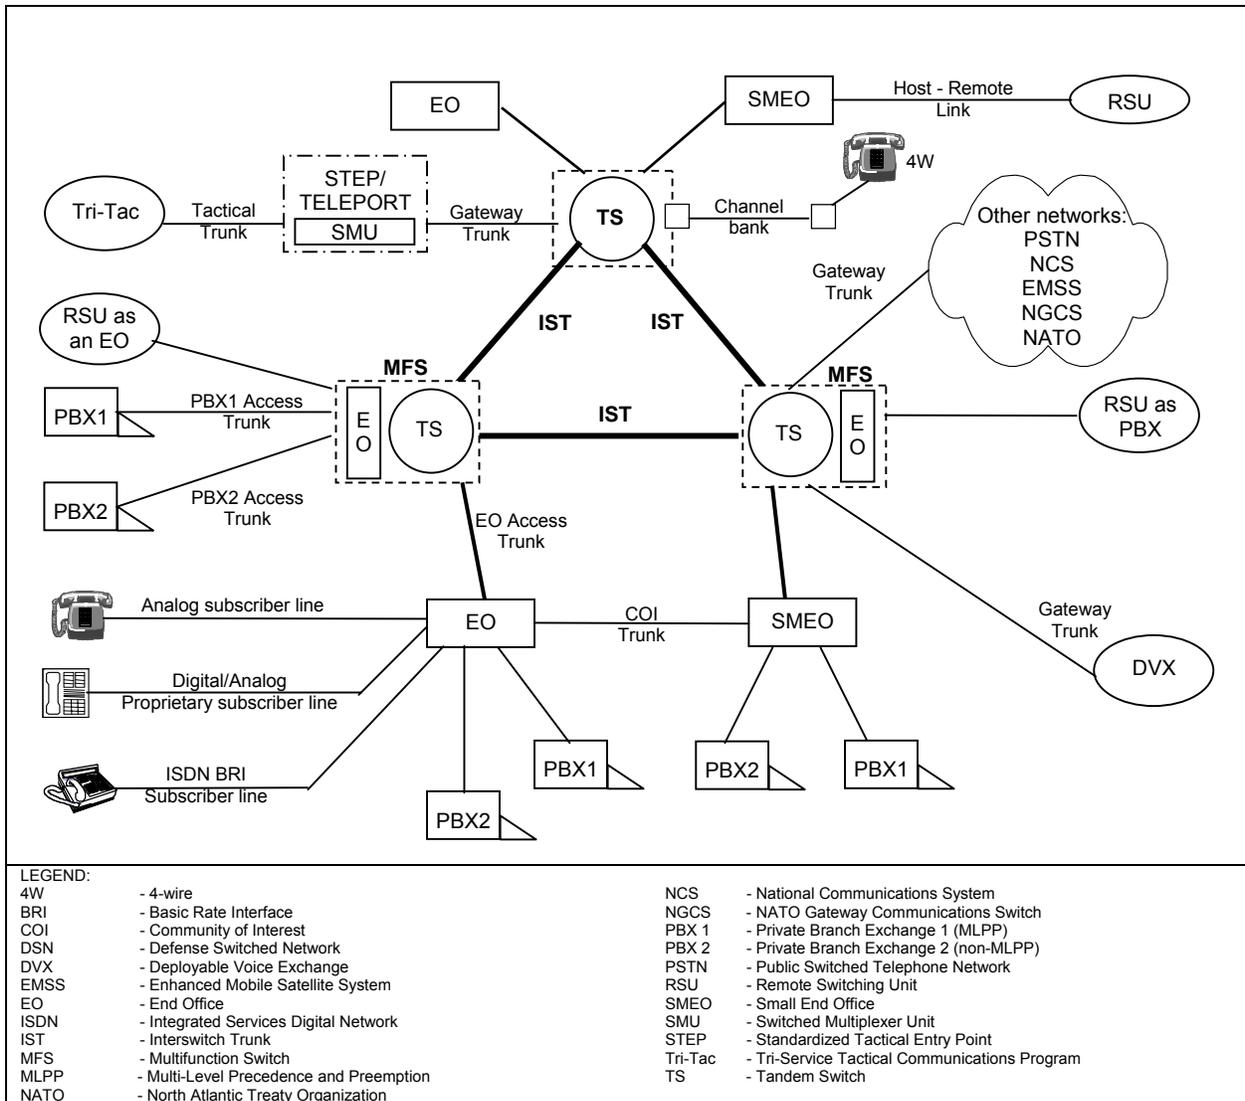


Figure 2-1. DSN Architecture

7. REQUIRED SYSTEM INTERFACES. Requirements specific to PBX 1s are listed in table 2-1. These requirements are derived from:

- a. DSN services for Network and Applications specified in Chairman of the Joint Chiefs of Staff instruction (CJCSI) 6215.01B, "Policy for Department of Defense Voice Services."
- b. GSCR interface and signaling requirements for trunks/lines verified through JITC testing and/or vendor submission of Letter(s) of Compliance (LoC).
- c. GSCR PBX 1 Capability Requirements (CRs) and Feature Requirements (FRs) verified through JITC testing and/or vendor submission of LoC.

Table 2-1. PBX 1 Requirements

DSN Trunk Interfaces				
Digital Interface	Critical	Requirements Required (R) or Conditional (C)		References
T1 CAS	No	Trunking	<ul style="list-style-type: none"> • Framing (R) • Line Code (R) • Signaling (R) • Alarms (R) • WWNDP (R) • Outpulsing digit formats (C: CAS only) • Routing (C) • Trunk Groups (C) • Call Processing (C) • CAS to CCS trunk interworking (C) • PCM-24/PCM-30 Interoperation (C) • Direct Inward Dialing (C) 	<ul style="list-style-type: none"> • GSCR Sect. 7 • GSCR Sect. 7 • GSCR Sect. 5 • GSCR Sect. 2.5.7, 7.1.4 and 7.2.2 • GSCR Sect. 4.5.1 • GSCR Sect. 4.5.2 • GSCR Sect. 4.2 • GSCR Sect. 2.5.5 and 2.5.6 • GSCR Sect. 4 • GSCR Sect. 3.10 • GSCR Sect. 7.3 • GSCR Sect. 2.3.2
E1 CAS	No (Europe only)		Voice	<ul style="list-style-type: none"> • MOS (R) • MLPP (R) • Secure calls (R)
T1 ISDN PRI NI 1/2 (ANSI T1.619a)	Yes	Facsimile	<ul style="list-style-type: none"> • Analog: EIA/TIA-465-A (R) • Digital: MIL-STD-188-161D (C) 	<ul style="list-style-type: none"> • DISR • DISR
E1 ISDN PRI (ITU-T Q955.3)	No (Europe only)	Data	<ul style="list-style-type: none"> • Modem (VBD) (R) • 56-kbps switched data (R: ISDN PRI only) • 64-kbps switched data (R: ISDN PRI only) • NX56 synchronous BER (R: ISDN PRI only) • NX64 synchronous BER (R: ISDN PRI only) • Secure data (STE/STU-III) (R) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • CJCSI 6215.01B
		VTC	<ul style="list-style-type: none"> • ITU-T H.320 (R: ISDN PRI only) 	<ul style="list-style-type: none"> • DISR
Analog Interface	Critical	Requirements Required (R) or Conditional (C)		References
Analog E&M Type 1	No	Trunking	<ul style="list-style-type: none"> • WWNDP (R) • Routing (C) • Call Processing (C) • Direct Inward Dialing (C) 	<ul style="list-style-type: none"> • GSCR Sect. 4.5.1 • GSCR Sect. 4.2 • GSCR Sect. 4 • GSCR Sect. 2.3.2
		Voice	<ul style="list-style-type: none"> • MOS (R) • MLPP (R) • Secure calls (R) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • CJCSI 6215.01B • CJCSI 6215.01B
		Facsimile	<ul style="list-style-type: none"> • Analog: EIA/TIA-465-A (R) • Digital: MIL-STD-188-161D (C) 	<ul style="list-style-type: none"> • DISR • DISR
		Data	<ul style="list-style-type: none"> • Secure data (STE/STU-III) (R) 	<ul style="list-style-type: none"> • CJCSI 6215.01B

Table 2-2. PBX 1 Requirements (continued)

DSN Line Interfaces				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
2-Wire Analog	Yes	Access	<ul style="list-style-type: none"> • DN Identification (R) • Line signaling (R) • Alerting Signals and Tones (R) • WWNDP (R) • Call Treatments (R) • 2W user access (R: 2-Wire Analog only) • Analog busy/idle (R: 2-Wire Analog only) 	<ul style="list-style-type: none"> • GSCR Sect. 2.1.1 • GSCR Sect. 5.2 • GSCR Sect. 5.5 • GSCR Sect. 4.5 • GSCR Sect. 4.1 • GSCR Sect. 4.3.3 • GSCR Sect. 4.3.4.1
ISDN BRI NI 1/2	No	Voice	<ul style="list-style-type: none"> • MOS (R) • Announcements (R) • MLPP (R) • Secure Calls (R) (ISDN BRI and Analog only) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • GSCR Sect. 3.1.3 • GSCR Sect. 3.4.3/3.9 • CJCSI 6215.01B
2-Wire Digital	No	Facsimile	<ul style="list-style-type: none"> • Analog: EIA/TIA-465-A (R) • Digital: MIL-STD-188-161D (C) (ISDN BRI only) 	<ul style="list-style-type: none"> • DISR • DISR
VoIP	No	Data	<ul style="list-style-type: none"> • Modem (VBD) (R) (Analog only) • 56-kbps switched data (R: ISDN BRI only) • 64-kbps switched data (R: ISDN BRI only) • NX56 synchronous BER (R: ISDN BRI only) • NX64 synchronous BER (R: ISDN BRI only) • Secure data (STE/STU-III) (R) (ISDN BRI and Analog only) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • GSCR Sect. 3.10 • CJCSI 6215.01B
		VTC	<ul style="list-style-type: none"> • ITU-T H.320 (R: ISDN BRI only) 	<ul style="list-style-type: none"> • DISR
DSN Features & Capabilities				
Interface	Critical	Requirements Required (R) or Conditional (C)		References
Common Features	No	<ul style="list-style-type: none"> • Selective call rejection (C) • Denied originating service (C) • Code restriction and diversion (C) • Call waiting (C) • Three-way calling (C) • Add-on transfer and conference calling (C) • Call forwarding (C) • Call pick-up (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.1.2 • GSCR Sect. 2.1.3 • GSCR Sect. 2.1.4 • GSCR Sect. 2.1.5 • GSCR Sect. 2.1.6 • GSCR Sect. 2.1.7 • GSCR Sect. 2.1.8 • GSCR Sect. 2.1.9
Attendant	No	<ul style="list-style-type: none"> • Initiate all precedence levels (C) • Visual display (C) • Override class of service (C) • Override busy line (C) • Call deflection (C) • Auto recall (C) • Waiting queue (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.2.1 • GSCR Sect. 2.2.2 • GSCR Sect. 2.2.3 • GSCR Sect. 2.2.4 • GSCR Sect. 2.2.5 • GSCR Sect. 2.2.6 • GSCR Sect. 2.2.7
Public Safety	No	<ul style="list-style-type: none"> • 911 (C) • Trace of terminating calls (C) • Outgoing call trace (C) • Tandem call trace (C) • Trace of a call in progress (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.4.1 • GSCR Sect. 2.4.2 • GSCR Sect. 2.4.3 • GSCR Sect. 2.4.4 • GSCR Sect. 2.4.5
Preset Conferencing	No	<ul style="list-style-type: none"> • Support 10 bridges; 1 originator and 20 conferees (C) • Assign up to 20 address numbers per bridge (C) • Use KXX codes for bridge access (C) • Conference notification recorded announcement (C) • Auto retrieval and alternate address (C) • Bridge release (C) • Lost connection (C) • Secondary conferencing (C) • Address translation (C) 		<ul style="list-style-type: none"> • GSCR Sect. 2.6 • GSCR Sect. 2.6 • GSCR Sect. 2.6 • GSCR Sect. 2.6.1 • GSCR Sect. 2.6.2 • GSCR Sect. 2.6.3 • GSCR Sect. 2.6.4 • GSCR Sect. 2.6.5 • GSCR Sect. 2.7

Table 2-2. PBX 1 Requirements (continued)

DSN Features & Capabilities			
Interface	Critical	Requirements Required (R) or Conditional (C)	References
Nailed-up Connections	No	<ul style="list-style-type: none"> • Between any two like terminations (C) • PCM-24 and PCM-30, both CAS and CCS (C) • Supervision passed end-to-end for A/D or D/A (C) • Monitored and auto reconfigure (C) • Support at least 10% of circuits as nailed-up (C) • Non-preemptable (C) 	<ul style="list-style-type: none"> • GSCR Sect. 2.8
PAT	No	<ul style="list-style-type: none"> • Classmark for/not for PAT screening (C) • 7 PAT mechanisms (C) • Outgoing call screening (C) • Functional structure (C) • Simultaneous calls limitation (C) • Overflow process (C) • Decrementing call-in-progress count (C) • Call treatment (C) • Queuing (C) • Attendant calls (C) • Operation measurement registers (C) • Maintenance and administration of thresholds (C) 	<ul style="list-style-type: none"> • GSCR Sect. 2.11.1 • GSCR Sect. 2.11.1 • GSCR Sect. 2.11.1.1 • GSCR Sect. 2.11.1.2 • GSCR Sect. 2.11.1.3 • GSCR Sect. 2.11.1.4 • GSCR Sect. 2.11.1.5 • GSCR Sect. 2.11.1.6 • GSCR Sect. 2.11.1.7 • GSCR Sect. 2.11.1.8 • GSCR Sect. 2.11.1.9 • GSCR Sect. 2.11.1.10
DSN Hotline services	No	<ul style="list-style-type: none"> • Hotline restrictions (C) • Auto initiate (C) • Analog and digital (C) • Subscription basis (C) • Protected hotline calling (C) • WWNDP interoperable (C) 	<ul style="list-style-type: none"> • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12 • GSCR Sect. 2.12.1-4 • GSCR Sect. 2.12.5
Network Management	No	<ul style="list-style-type: none"> • Interfaces (C) • Measurements and data generation (C) • Fault management (C) • Configuration management (C) • Accounting management (C) • Performance management (C) • NM controls (C) • Remote access (C) 	<ul style="list-style-type: none"> • GSCR Sect. 9.1 • GSCR Sect. 9.2 • GSCR Sect. 9.3 • GSCR Sect. 9.4 • GSCR Sect. 9.5 • GSCR Sect. 9.6 • GSCR Sect. 9.7 • GSCR Sect. 9.8
ISDN services	No	<ul style="list-style-type: none"> • EKTS (C) 	<ul style="list-style-type: none"> • GSCR Sect. 10, table 10-3
Synchronization	Yes	<ul style="list-style-type: none"> • Line timing mode (R) • Internal Stratum 4 (R) 	<ul style="list-style-type: none"> • GSCR Sect. 11.1.1.2 • GSCR Sect. 11.1.2.2
Reliability	Yes	<ul style="list-style-type: none"> • GR-512-CORE (R) 	<ul style="list-style-type: none"> • GSCR Sect.12.2
Security ¹	Yes	<ul style="list-style-type: none"> • DITSCAP (R) 	<ul style="list-style-type: none"> • GSCR Sect. 13

Table 2-2. PBX 1 Requirements (continued)

DSN Features & Capabilities						
Interface	Critical	Requirements Required (R) or Conditional (C)		References		
VoIP						
VoIP System	No	VoIP function is conditional. If VoIP is provided, all of the following requirements must be met: <ul style="list-style-type: none"> • MOS 4.0 or better • ITU-T G.711 PCM codec • Security in accordance with DITSCAP • NM • Line Timing • Internal clock • Latency ≥ 60 msec • IPv6 capable 		<ul style="list-style-type: none"> • GSCR App. 3 		
LANs	No	VoIP function is conditional. If VoIP is provided, all of the following requirements must be met: <ul style="list-style-type: none"> • LAN parameters • CoS/QoS • .99999 availability • Modular devices • VLAN support • NM and voice in different VLAN • IEEE standards conformance • 2 second link restoral • LAN NM • Traffic Engineering 		<ul style="list-style-type: none"> • GSCR App. 3 		
Network Gateways						
Gateway	Critical	Requirements Required (R) or Conditional (C)		References		
PSTN	No	Trunking	<ul style="list-style-type: none"> • Positive Identification Control (C) • On-Netting (C) • Off Netting (C) 	<ul style="list-style-type: none"> • CJCSI 6215.01B • CJCSI 6215.01B • CJCSI 6215.01B 		
LEGEND:						
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> 2W - 2-Wire 911 - 911 Emergency Service A/D - Analog to Digital ANSI - American National Standards Institute App - Appendix BER - Bit Error Ratio BRI - Basic Rate Interface CAS - Channel Associated Signaling CCS - Common Channel Signaling CJCSI - Chairman of the Joint Chiefs of Staff Instruction CoS - Class of Service D/A - Digital to Analog DISA - Defense Information Systems Agency DISR - Department of Defense Information Technology Standards Registry DITSCAP - Department of Defense Information Technology Security Certification and Accreditation Process DN - Directory Number DSN - Defense Switched Network E&M - Ear and Mouth E1 - European Basic Multiplex Rate (2.048 Mbps) EIA - Electronic Industries Alliance EIA-465 - Group 3 Facsimile Apparatus for Document Transmission EKTS - Electronic Key Telephone System GR - Generic Requirement (Telcordia) GSCR - Generic Switching Center Requirements H.320 - Standard for narrowband VTC IATP - Information Assurance Test Plan IEEE - Institute of Electrical and Electronics Engineers, Inc. IPv6 - Internet Protocol version 6 ISDN - Integrated Services Digital Network ITU-T - International Telecommunication Union – Telecommunication Standardization Sector JITC - Joint Interoperability Test Command kbps - kilobits per second </td> <td style="width: 50%; vertical-align: top;"> KXX - K= any number 2-8; X= any number 1-9 LAN - Local Area Network LoC - Letter(s) of Compliance Mbps - Megabits per second MIL-STD - Military Standard MLPP - Multi-Level Precedence and Preemption MOS - Mean Opinion Score msec - millisecond NI 1/2 - National ISDN 1 or 2 NM - Network Management NX56 - Data format restricted to multiples of 56 kbps NX64 - Data format restricted to multiples of 64 kbps PAT - Precedence Access Threshold PBX - Private Branch Exchange PCM - Pulse Code Modulation PCM-24 - Pulse Code Modulation - 24 Channels PCM-30 - Pulse Code Modulation - 30 Channels PRI - Primary Rate Interface PSTN - Public Switched Telephone Network Q.955.3 - ISDN Signaling Standard for E1 MLPP QoS - Quality of Service Sect. - section SS7 - Signaling System 7 STE - Secure Terminal Equipment STU-III - Secure Telephone Unit-3rd generation T1 - Digital Transmission Link Level 1 (1.544 Mbps) T1.619a - SS7 and ISDN MLPP Signaling Standard for T1 TIA - Telecommunications Industry Association VBD - Variable bit data VLAN - Virtual Local Area Network VoIP - Voice over Internet Protocol VTC - Video Teleconferencing WWNDP - Worldwide Numbering and Dialing Plan </td> </tr> </table>					2W - 2-Wire 911 - 911 Emergency Service A/D - Analog to Digital ANSI - American National Standards Institute App - Appendix BER - Bit Error Ratio BRI - Basic Rate Interface CAS - Channel Associated Signaling CCS - Common Channel Signaling CJCSI - Chairman of the Joint Chiefs of Staff Instruction CoS - Class of Service D/A - Digital to Analog DISA - Defense Information Systems Agency DISR - Department of Defense Information Technology Standards Registry DITSCAP - Department of Defense Information Technology Security Certification and Accreditation Process DN - Directory Number DSN - Defense Switched Network E&M - Ear and Mouth E1 - European Basic Multiplex Rate (2.048 Mbps) EIA - Electronic Industries Alliance EIA-465 - Group 3 Facsimile Apparatus for Document Transmission EKTS - Electronic Key Telephone System GR - Generic Requirement (Telcordia) GSCR - Generic Switching Center Requirements H.320 - Standard for narrowband VTC IATP - Information Assurance Test Plan IEEE - Institute of Electrical and Electronics Engineers, Inc. IPv6 - Internet Protocol version 6 ISDN - Integrated Services Digital Network ITU-T - International Telecommunication Union – Telecommunication Standardization Sector JITC - Joint Interoperability Test Command kbps - kilobits per second	KXX - K= any number 2-8; X= any number 1-9 LAN - Local Area Network LoC - Letter(s) of Compliance Mbps - Megabits per second MIL-STD - Military Standard MLPP - Multi-Level Precedence and Preemption MOS - Mean Opinion Score msec - millisecond NI 1/2 - National ISDN 1 or 2 NM - Network Management NX56 - Data format restricted to multiples of 56 kbps NX64 - Data format restricted to multiples of 64 kbps PAT - Precedence Access Threshold PBX - Private Branch Exchange PCM - Pulse Code Modulation PCM-24 - Pulse Code Modulation - 24 Channels PCM-30 - Pulse Code Modulation - 30 Channels PRI - Primary Rate Interface PSTN - Public Switched Telephone Network Q.955.3 - ISDN Signaling Standard for E1 MLPP QoS - Quality of Service Sect. - section SS7 - Signaling System 7 STE - Secure Terminal Equipment STU-III - Secure Telephone Unit-3 rd generation T1 - Digital Transmission Link Level 1 (1.544 Mbps) T1.619a - SS7 and ISDN MLPP Signaling Standard for T1 TIA - Telecommunications Industry Association VBD - Variable bit data VLAN - Virtual Local Area Network VoIP - Voice over Internet Protocol VTC - Video Teleconferencing WWNDP - Worldwide Numbering and Dialing Plan
2W - 2-Wire 911 - 911 Emergency Service A/D - Analog to Digital ANSI - American National Standards Institute App - Appendix BER - Bit Error Ratio BRI - Basic Rate Interface CAS - Channel Associated Signaling CCS - Common Channel Signaling CJCSI - Chairman of the Joint Chiefs of Staff Instruction CoS - Class of Service D/A - Digital to Analog DISA - Defense Information Systems Agency DISR - Department of Defense Information Technology Standards Registry DITSCAP - Department of Defense Information Technology Security Certification and Accreditation Process DN - Directory Number DSN - Defense Switched Network E&M - Ear and Mouth E1 - European Basic Multiplex Rate (2.048 Mbps) EIA - Electronic Industries Alliance EIA-465 - Group 3 Facsimile Apparatus for Document Transmission EKTS - Electronic Key Telephone System GR - Generic Requirement (Telcordia) GSCR - Generic Switching Center Requirements H.320 - Standard for narrowband VTC IATP - Information Assurance Test Plan IEEE - Institute of Electrical and Electronics Engineers, Inc. IPv6 - Internet Protocol version 6 ISDN - Integrated Services Digital Network ITU-T - International Telecommunication Union – Telecommunication Standardization Sector JITC - Joint Interoperability Test Command kbps - kilobits per second	KXX - K= any number 2-8; X= any number 1-9 LAN - Local Area Network LoC - Letter(s) of Compliance Mbps - Megabits per second MIL-STD - Military Standard MLPP - Multi-Level Precedence and Preemption MOS - Mean Opinion Score msec - millisecond NI 1/2 - National ISDN 1 or 2 NM - Network Management NX56 - Data format restricted to multiples of 56 kbps NX64 - Data format restricted to multiples of 64 kbps PAT - Precedence Access Threshold PBX - Private Branch Exchange PCM - Pulse Code Modulation PCM-24 - Pulse Code Modulation - 24 Channels PCM-30 - Pulse Code Modulation - 30 Channels PRI - Primary Rate Interface PSTN - Public Switched Telephone Network Q.955.3 - ISDN Signaling Standard for E1 MLPP QoS - Quality of Service Sect. - section SS7 - Signaling System 7 STE - Secure Terminal Equipment STU-III - Secure Telephone Unit-3 rd generation T1 - Digital Transmission Link Level 1 (1.544 Mbps) T1.619a - SS7 and ISDN MLPP Signaling Standard for T1 TIA - Telecommunications Industry Association VBD - Variable bit data VLAN - Virtual Local Area Network VoIP - Voice over Internet Protocol VTC - Video Teleconferencing WWNDP - Worldwide Numbering and Dialing Plan					
NOTE: JITC verifies security via an LoC. DITSCAP information assurance testing is accomplished via DISA-led Information Assurance test teams and published in a separate report.						

8. TEST NETWORK DESCRIPTION. The SUT was tested at JITC's Global Information Grid Network Test Facility in a manner and configuration similar to that of the DSN operational environment. This test was conducted using the two test configurations as shown in figures 2-2 and 2-3. Testing of the system's required functions and features was conducted using the notional test configuration depicted in figure 2-2. Per this configuration, the SUT was tested as the end-point in relation to the other switches. This configuration accurately emulates the DSN operational environment. Figure 2-3 depicts the test configuration used to test the Advanced DSN Integrated Management Support System network management required functions and features.

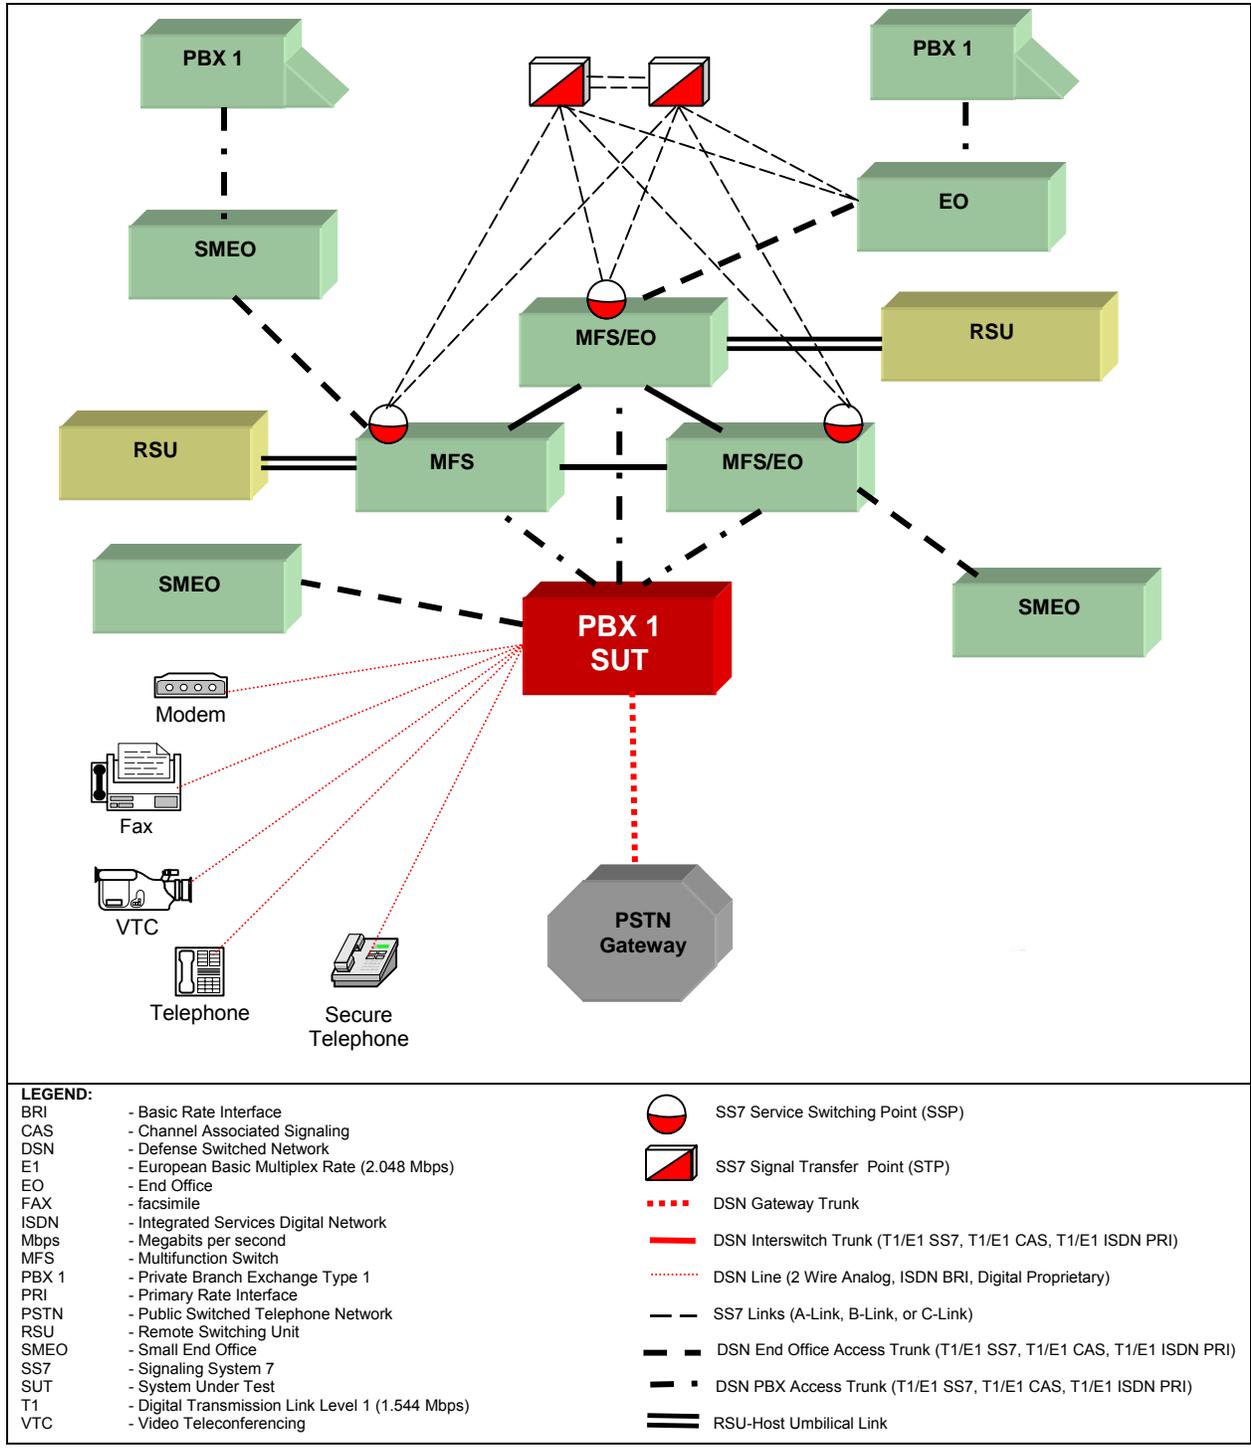


Figure 2-2. Notional Test Configuration

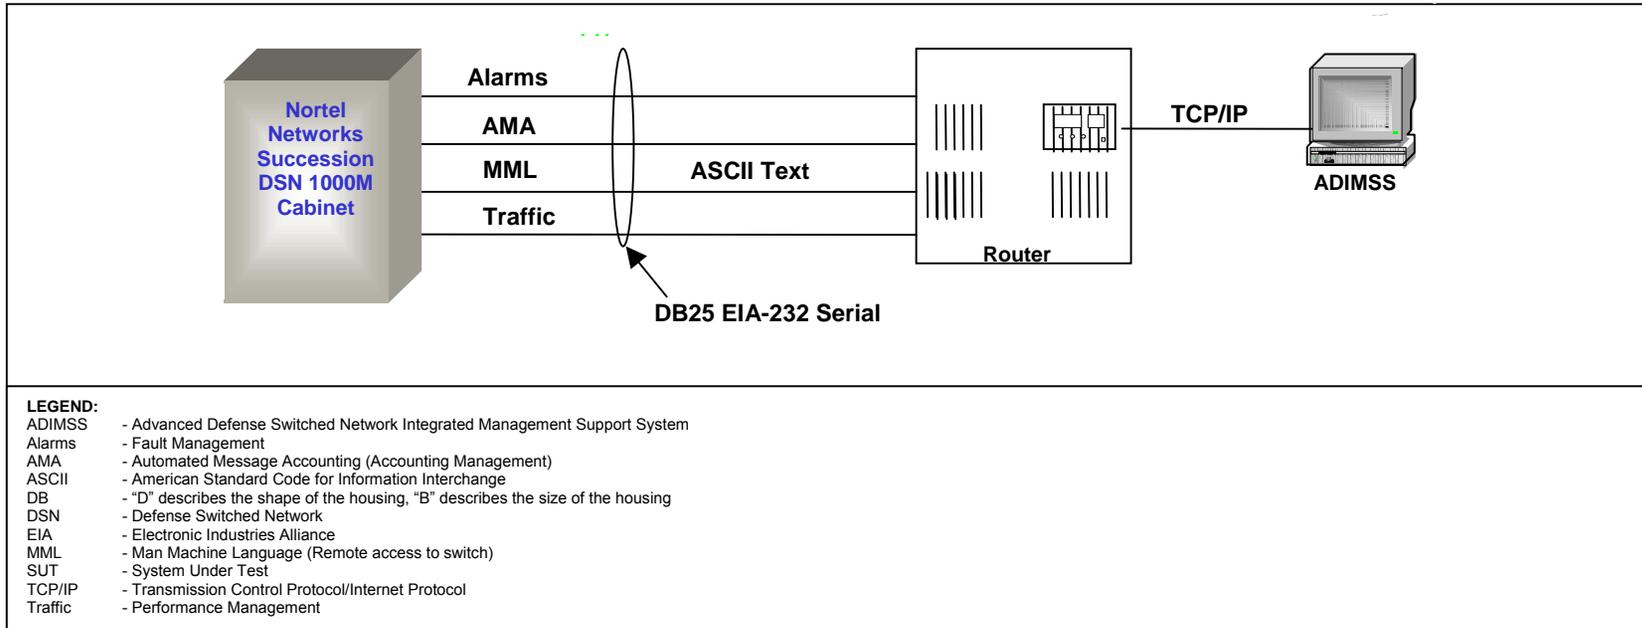


Figure 2-3. SUT ADIMSS Network Management System Interface

9. SYSTEM CONFIGURATIONS. Table 2-2 provides the system configurations used in the test.

Table 2-2. Tested System Configurations

System Name	Software Release	
Nortel Networks MSL-100	SEO6	
Avaya MultiVantage S8700	R011x.7585.7.0.2	
Nortel Networks Succession DSN Option 11C Cabinet Digital Switching System	Product Engineer Code	Software Release
CORE Processor	NT5D03FB	3.0
Trunk Module Digital Interface Card	NTRB21AB	
Trunk Module Digital Interface Card	NTRB21AC	
Multipurpose ISDN Signaling Processor Card	NTBK22AA	
Serial Data Interface Card	N7AK02BC	
Digital Line Card	NT8D02GA	
Analog Line Card	NT8D09AK	
Universal Interface Line Card	NT6D71AA	
Siemens EWSD	19d with Patch Set 32	
Nortel Networks Succession DSN 1000M Single Group Call Server	3.0	
Siemens KNS-4100	APS4V2.3	
Lucent Technologies 5ESS	5E16.2	
SMU 96 Tactical Gateway	RD302185	
MARCONI ATM switches	Versions 6.2 and 7.1	
LEGEND:		
ATM - Asynchronous Transfer Mode	M - Meridian	
DSN - Defense Switched Network	MSL - Meridian Switching Load	
EWSD - Elektronisches Wählsystem Digital	SMU - Switch Multiplexer Unit	
ISDN - Integrated Services Digital Network		

10. TESTING LIMITATIONS. None.

11. TEST RESULTS

a. Discussion

(1) DSN. All critical interface CRs and FRs for DSN were met. The following minor exceptions are noted:

(a) The SUT does not meet the following GSCR requirement: recovery from a local red alarm within the allowed time period on a Pulse Code Modulation-24 channel (PCM-24) interface. It takes approximately 30 seconds for a PCM-24 interface on the SUT to recover from a red alarm. The GSCR requirement for recovery from a local red alarm is 15 seconds plus or minus 5 seconds. The operational impact is minor.

(b) The SUT Analog Ear and Mouth (E&M) Signaling Type I trunking is not certified. The SUT's E&M trunks do not meet the GSCR requirements for DSN preempt signals. This is not a critical requirement for a PBX. The operational impact is minor.

(c) The SUT does not meet the American National Standards Institute (ANSI) T1.619 1992, ANSI T1.619a 1994, standards for ISDN ANSI T1.619a PRI National ISDN 2 (NI 2) protocol with unavailable resources. The SUT's ANSI T1.619a ISDN PRI trunkgroups using NI 2 protocol send a release complete message in lieu of a disconnect message with cause value 46 (unavailable resources). There was no noted discrepancy during interoperability testing with this anomaly. The operational impact is minor.

(d) The SUT does not support intra-switch call waiting on analog instruments. The operational impact is minor. Inter-switch precedence call waiting is supported on all instrument types on the SUT.

(e) The SUT Attendant Console does not meet the following requirement: Automatic Recall of Attendant Console, "camp-on" feature as required in table 2-1 Attendant Features, GSCR paragraph 2.1.3. The operational impact is minor.

(f) The SUT does not support route digit 5 or 6 for hotline services. This is not a critical requirement for a PBX. The operational impact is minor.

(g) The SUT does not meet the European Telecommunications Standards Institute (ETSI) International Telecommunication Union - Telecommunication Standardization Sector (ITU-T) Q.955.3 standards for an ISDN PRI protocol with unavailable resources. When an unavailable resources condition occurs, the SUT sends a release complete message in lieu of a disconnect message with cause 46 (unavailable resources). This was tested with multiple DSN switches and the destination switch in all instances receives the correct blocked precedence announcement. The operational impact is minor.

(2) Public Switched Telephone Network (PSTN). All interface CRs and FRs for PSTN were met.

b. System Interoperability Results. The SUT with Software Release 3.0 is certified for joint use in the DSN as a PBX 1 in accordance with the requirements set forth in the GSCR. Minor discrepancies identified during testing will have no adverse operational impact. The interoperability test summary is shown in table 2-3 and the detailed interoperability test status is shown table 2-4.

Table 2-3. SUT Interoperability Test Summary

DSN Trunk Interfaces				
Interface & Signaling		Critical	Status	Remarks
T1 CAS (DTMF, DP)		No	Certified	Met all CRs and FRs with the following minor exception: Restoral to service from a local red alarm not met. ¹ The operational impact is minor.
E1 CAS (DTMF, DP)		No (Europe only)	Certified	Met all CRs and FRs.
T1 ISDN PRI NI 1/2 (ANSI T1. 619a)		Yes	Certified	Met all CRs and FRs with the following minor exceptions: NI 2 Protocol provides a release complete message in lieu of a disconnect message for unavailable resources. ² The operational impact is minor.
E1 ISDN PRI (ITU-T Q.955.3)		No (Europe only)	Certified	Met all CRs and FRs with the following minor exceptions: ETSI Protocol provides a release complete message in lieu of a disconnect message for unavailable resources.² The operational impact is minor.
Analog E&M Type 1		No	Not Certified	Analog E&M services are not met. ³ The operational impact is minor.
DSN Line Interfaces				
Interface & Signaling		Critical	Status	Remarks
2-Wire Analog (GR-506-CORE)		Yes	Certified	Met all CRs and FRs with the following minor exception: Does not support intraswitch call waiting. ⁴ The operational impact is minor.
ISDN BRI NI 1/2		Yes	Certified	Met all CRs and FRs.
Digital Proprietary		No	Certified	Met all CRs and FRs.
VoIP		No	Not Tested	The SUT solution excludes VoIP.
Network Gateways				
Interface & Signaling		Critical	Status	Remarks
PSTN	T1 CAS (DTMF, DP)	No	Certified	Met all CRs and FRs.
	E1 CAS (DTMF, DP)	No (Europe only)	Certified	Met all CRs and FRs.
	T1 ISDN PRI NI2	No	Certified	Met all CRs and FRs.
	E1 ISDN PRI (ITU-T Q.931)	No (Europe only)	Certified	Met all CRs and FRs.
DSN Features and Capabilities				
Features and Capabilities		Critical	Status	Remarks
Common Features		No	Certified	Met all Common Features.
Attendant		No	Certified	Met all CRs and FRs except attendant services automatic recall. ⁵ The operational impact is minor.
Public Safety		No	Not Tested	This feature is not offered by the SUT.
Preset Conferencing		No	Not Tested	This feature is not offered by the SUT.
Nailed-up Connections		No	Not Tested	This feature is not offered by the SUT.
PAT		No	Not Tested	This feature is not offered by the SUT.
DSN Hotline services		No	Not Certified	Hotline services are not met. ⁶ The operational impact is minor.
Network Management		No	Certified	Met all CRs and FRs.
ISDN services (EKTS)		No	Not Tested	
Synchronization		Yes	Certified	Met all CRs and FRs.
Reliability		Yes	Certified	Met all CRs and FRs.
Security		Yes	See note 7.	
VoIP System		No	Not Tested	This feature is not offered by the SUT.
VoIP LANs		No	Not Tested	This feature is not offered by the SUT.

Table 2-3. SUT Interoperability Test Summary (continued)

LEGEND:			
ANSI	- American National Standards Institute	JITC	- Joint Interoperability Test Command
BRI	- Basic Rate Interface	LAN	- Local Area Network
CAS	- Channel Associated Signaling	LoC	- Letters of Compliance
CRs	- Capability Requirements	Mbps	- Megabits per second
DP	- Dial Pulse	MLPP	- Multi-Level Precedence Preemption
DSN	- Defense Switched Network	NI 1/2	- National ISDN 1 or 2
DTMF	- Dual Tone Multi-Frequency	PAT	- Precedence Access Threshold
E&M	- Ear and Mouth	PRI	- Primary Rate Interface
E1	- European Basic Multiplex Rate (2.048 Mbps)	PSTN	- Public Switched Telephone Network
EKTS	- Electronic Key Telephone System	Q.931	- Signaling standard for ISDN
ETSI	- European Telecommunications Standards Institute	Q.955.3	- ISDN Signaling standard for E1 MLPP
FRs	- Feature Requirements	SS7	- Signaling System 7
GR	- Generic Requirement (Telcordia)	SUT	- System Under Test
GSCR	- Generic Switching Center Requirements	T1	- Digital Transmission Link Level 1 (1.544 Mbps)
IATP	- Information Assurance Test Plan	T1.619a	- SS7 and ISDN signaling standard for T1
ISDN	- Integrated Services Digital Network	VoIP	- Voice over Internet Protocol
ITU-T	- International Telecommunication Union - Telecommunication Standardization Sector		
NOTES:			
1	The SUT does not meet the GSCR capability requirements for restoral to service from a local red alarm. The SUT takes 30 seconds to recover versus the required 15 seconds.		
2	ISDN T1 PRI trunkgroups using NI 2 and ISDN E1 PRI trunk groups using ETSI protocol send a release complete message in lieu of a disconnect message with Cause 46 (unavailable resources).		
3	Analog E&M Signaling Type 1 did not pass the DSN preempt signals as required by the GSCR for the four types of preemption. Analog E&M Signaling Type 1 is not certified for use in the DSN. Analog E&M signaling is not a critical requirement.		
4	Analog instruments do not provide intra-switch call waiting.		
5	The SUT's attendant console does not support automatic recall of attendant.		
6	The SUT does not meet the GSCR capability requirements for hotline services. Hotline services are not a critical requirement.		
7	JITC verifies security via vendor LoC. Further testing in accordance with the IATP is required prior to being authorized connection approval. This testing is done by Defense Information Systems Agency Information Assurance test teams and published in a separate report.		

12. TEST AND ANALYSIS REPORT. No detailed test report was developed in accordance with the Program Manager's request. JITC distributes interoperability information via the JITC Electronic Report Distribution (ERD) system, which uses Unclassified-But-Sensitive Internet Protocol Router Network (NIPRNet) e-mail. More comprehensive interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/gov users on the NIPRNet at <https://stp.fhu.disa.mil>. Test reports, lessons learned, and related testing documents and references are on the JITC Joint Interoperability Tool (JIT) at <http://jit.fhu.disa.mil> (NIPRNet), or <http://199.208.204.125> (SIPRNet). Information related to DSN testing is on the Telecom Switched Services Interoperability (TSSI) website at <http://jitic.fhu.disa.mil/tssi>.

Table 2-4. SUT Interoperability Requirements/Status

DSN Trunk Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
T1 CAS	No	Certified	Trunking	Framing (R)	GSCR Sect. 7	Met	
				Line Code (R)	GSCR Sect. 7	Met	
				Signaling (R)	GSCR Sect. 5	Met	
				Alarms (R)	GSCR Sect. 2.5.7, 7.1.4 & 7.2.2	Met	Minor ¹
				WWNDP (R)	GSCR Sect. 4.5.1	Met	
				Outpulsing digit formats (C)	GSCR Sect. 4.5.2	Met	
				Routing (C)	GSCR Sect. 4.2	Met	
				Trunk Groups (C)	GSCR Sect. 2.5.5 & 2.5.6	Met	
				Call Processing (C)	GSCR Sect. 4	Met	
				CAS to CCS trunk interworking (C)	GSCR Sect. 3.10	Not Tested	
			PCM-24/PCM-30 Interoperation (C)	GSCR Sect. 7.3	Not Tested		
			Direct Inward Dialing (C)	GSCR Sect. 2.3.2	Met		
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				MLPP (R)	GSCR Sect. 3	Met	Minor ²
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
				64-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
NX56 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested					
NX64 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested					
VTC	Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met				
	ITU-T H.320 (R: ISDN PRI only)	DISR	Not Tested				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Trunk Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
E1 CAS	No	Certified	Trunking	Framing (R)	GSCR Sect. 7	Met	
				Line Code (R)	GSCR Sect. 7	Met	
				Signaling (R)	GSCR Sect. 5	Met	
				Alarms (R)	GSCR Sect. 2.5.7, 7.1.4 & 7.2.2	Met	Minor ¹
				WWNDP (R)	GSCR Sect. 4.5.1	Met	
				Outpulsing digit formats (C)	GSCR Sect. 4.5.2	Met	
				Routing (C)	GSCR Sect. 4.2	Met	
				Trunk Groups (C)	GSCR Sect. 2.5.5 & 2.5.6	Met	
				Call Processing (C)	GSCR Sect. 4	Met	
				CAS to CCS trunk interworking (C)	GSCR Sect. 3.10	Not Tested	
			PCM-24/PCM-30 Interoperation (C)	GSCR Sect. 7.3	Not Tested		
			Direct Inward Dialing (C)	GSCR Sect. 2.3.2	Met		
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				MLPP (R)	GSCR Sect. 3	Met	Minor ²
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
				64-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
NX56 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested					
NX64 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested					
VTC	Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met				
	ITU-T H.320 (R: ISDN PRI only)	DISR	Not Tested				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Trunk Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
T1 ISDN PRI (ANSI T1.619a)	Yes	Certified	Trunking	Framing (R)	GSCR Sect. 7	Met	
				Line Code (R)	GSCR Sect. 7	Met	
				Signaling (R)	GSCR Sect. 5	Met	
				Alarms (R)	GSCR Sect. 2.5.7, 7.1.4 & 7.2.2	Met	Minor ¹
				WWNDP (R)	GSCR Sect. 4.5.1	Met	
				Outpulsing digit formats (C)	GSCR Sect. 4.5.2	Met	
				Routing (C)	GSCR Sect. 4.2	Met	
				Trunk Groups (C)	GSCR Sect. 2.5.5 & 2.5.6	Met	
				Call Processing (C)	GSCR Sect. 4	Met	
				CAS to CCS trunk interworking (C)	GSCR Sect. 3.10	Not Tested	
			PCM-24/PCM-30 Interoperation (C)	GSCR Sect. 7.3	Not Tested		
			Direct Inward Dialing (C)	GSCR Sect. 2.3.2	Met		
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				MLPP (R)	GSCR Sect. 3	Met	Minor ²
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Met	
				64-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Met	
NX56 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Met					
NX64 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Met					
VTC	Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met				
	ITU-T H.320 (R: ISDN PRI only)	DISR	Met				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Trunk Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
E1 ISDN PRI (ITU-T Q.955.3)	Yes	Certified	Trunking	Framing (R)	GSCR Sect. 7	Met	
				Line Code (R)	GSCR Sect. 7	Met	
				Signaling (R)	GSCR Sect. 5	Met	
				Alarms (R)	GSCR Sect. 2.5.7, 7.1.4 & 7.2.2	Met	Minor ¹
				WWNDP (R)	GSCR Sect. 4.5.1	Met	
				Outpulsing digit formats (C)	GSCR Sect. 4.5.2	Met	
				Routing (C)	GSCR Sect. 4.2	Met	
				Trunk Groups (C)	GSCR Sect. 2.5.5 & 2.5.6	Met	
				Call Processing (C)	GSCR Sect. 4	Met	
				CAS to CCS trunk interworking (C)	GSCR Sect. 3.10	Not Tested	
			PCM-24/PCM-30 Interoperation (C)	GSCR Sect. 7.3	Not Tested		
			Direct Inward Dialing (C)	GSCR Sect. 2.3.2	Met		
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				MLPP (R)	GSCR Sect. 3	Met	Minor ²
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Met	
				64-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Met	
NX56 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Met					
NX64 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Met					
VTC	Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met				
	ITU-T H.320 (R: ISDN PRI only)	DISR	Met				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Trunk Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
E&M TYPE 1	No	Not Certified	Trunking	Signaling (R)	GSCR Sect. 5	Met	
				Alarms (R)	GSCR Sect. 2.5.7, 7.1.4 & 7.2.2	Met	
				WWNDP (R)	GSCR Sect. 4.5.1	Met	
				Outpulsing digit formats (C)	GSCR Sect. 4.5.2	Met	
				Routing (C)	GSCR Sect. 4.2	Met	
				Trunk Groups (C)	GSCR Sect. 2.5.5 & 2.5.6	Met	
				Call Processing (R)	GSCR Sect. 4	Met	
				CAS to CCS trunk interworking (C)	GSCR Sect. 3.10	Not Tested	
				PCM-24/PCM-30 Interoperation (C)	GSCR Sect. 7.3	Not Tested	
				Direct Inward Dialing (C)	GSCR Sect. 2.3.2	Met	
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				MLPP (R)	GSCR Sect. 3	Not Met	Minor ³
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
				64-kbps switched data (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
				NX56 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
				NX64 synchronous BER (R: ISDN PRI only)	GSCR Sect. 3.10	Not Tested	
VTC	Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Not Tested				
	ITU-T H.320 (R: ISDN PRI only)	DISR	Not Tested				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Line Interfaces							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
2-Wire Analog (GR-506-CORE)	Yes	Certified	Access	DN Identification (R)	GSCR Sect 2.1.1	Met	
				Line signaling (R)	GSCR Sect 5.2	Met	
				Alerting Signals and Tones (R)	GSCR Sect 5.5	Met	
				WWNDP (R)	GSCR Sect. 4.5	Met	
				Call Treatments (R)	GSCR Sect. 4.1	Met	
				2W user access (R)	GSCR Sect 4.3.3	Met	
				Analog busy/idle (R)	GSCR Sect 4.3.4.1	Met	
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				Announcements (R)	GSCR Sect. 3.1.3	Met	
				MLPP (R)	GSCR Sect. 3.4.3, 3.9	Met	
				Secure calls (R)	CJCSI 6215.01B	Met	
			Facsimile	Analog: EIA/TIA-465-A (R)	DISR	Met	
				Digital: MIL-STD-188-161D (C)	DISR	Not Tested	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met	
VTC	ITU-T H.320 (R: ISDN BRI only)	DISR	Not Tested				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Line Interfaces (continued)							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
ISDN BRI NI 1/2	Yes	Certified	Access	DN Identification (R)	GSCR Sect 2.1.1	Met	
				Line signaling (R)	GSCR Sect 5.2	Met	
				Alerting Signals and Tones (R)	GSCR Sect 5.5	Met	
				WWNDP (R)	GSCR Sect. 4.5	Met	
				Call Treatments (R)	GSCR Sect. 4.1	Met	
			Voice	MOS (R)	CJCSI 6215.01B	Met	
				Announcements (R)	GSCR Sect. 3.1.3	Met	
				MLPP (R)	GSCR Sect. 3.4.3, 3.9	Met	
				Secure calls (R)	CJCSI 6215.01B	Met	
			Data	Modem (VBD) (R)	CJCSI 6215.01B	Met	
				56-kbps switched data (R))	GSCR Sect. 3.10	Met	
				64-kbps switched data (R)	GSCR Sect. 3.10	Met	
				NX56 synchronous BER (R)	GSCR Sect. 3.10	Met	
				NX64 synchronous BER (R)	GSCR Sect. 3.10	Met	
				Secure data (STE/STU-III) (R)	GSCR Sect. 3.10	Met	
			VTC	ITU-T H.320 (R: ISDN BRI only)	DISR	Met	

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Line Interfaces (continued)							
Interface	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
Digital Proprietary	No	Certified	Access	DN Identification (R)	GSCR Sect 2.1.1	Met	
				Line signaling (C)	GSCR Sect 5.2	Met	
				Alerting Signals and Tones (C)	GSCR Sect 5.5	Met	
				WWNDP (R)	GSCR Sect. 4.5	Met	
				Call Processing (C)	GSCR Sect. 4.4	Met	
				Call Treatments (C)	GSCR Sect. 4.1	Met	
			Voice	MOS (R)	CJCSI 6215.01B	Met	
DSN Features & Capabilities							
Features/ Capabilities	Critical	Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact
Common Features	No	Certified	Selective call rejection (C)		GSCR Sect. 2.1.2	Not Tested	
			Denied originating service (C)		GSCR Sect. 2.1.3	Not Tested	
			Code restriction and diversion (C)		GSCR Sect. 2.1.4	Met	
			Three-way calling (C)		GSCR Sect. 2.1.5	Met	
			Add-on transfer and conference calling (C)		GSCR Sect. 2.1.6	Met	
			Call forwarding (C)		GSCR Sect. 2.1.7	Met	
			Call pick-up (C)		GSCR Sect. 2.1.8	Met	
Attendant	No	Certified	Call waiting (C)		GSCR Sect. 2.1.9	Not Met	Minor ⁴
			Initiate all precedence levels (C)		GSCR Sect. 2.2.1	Met	
			Visual display (C)		GSCR Sect. 2.2.2	Met	
			Override class of service (C)		GSCR Sect. 2.2.3	Met	
			Override busy line (C)		GSCR Sect. 2.2.4	Met	
			Call deflection (C)		GSCR Sect. 2.2.5	Met	
			Auto recall (C)		GSCR Sect. 2.2.6	Not Met	Minor ⁵
Public Safety	No	Not Tested	Waiting queue (C)		GSCR Sect. 2.2.7	Met	
			911 (C)		GSCR Sect. 2.4.1	Not Tested	
			Trace of terminating calls (C)		GSCR Sect. 2.4.2	Met	
			Outgoing call trace (C)		GSCR Sect. 2.4.3	Met	
			Tandem call trace (C)		GSCR Sect. 2.4.4	Met	
Trace of a call in progress (C)		GSCR Sect. 2.4.5	Met				

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Features & Capabilities (continued)						
Features/ Capabilities	Critical	Status	GSCR Requirement Required (R) Conditional (C)	Reference	Test Results	Operational Impact
Preset Conferencing	No	Not Tested	Support 10 bridges; 1 originator and 20 conferees (C)	GSCR Sect. 2.1.6	Not Tested	
			Assign up to 20 address numbers per bridge (C)	GSCR Sect. 2.6	Not Tested	
			Use KXX codes for bridge access (C)	GSCR Sect. 2.6	Not Tested	
			Conference notification recorded announcement (C)	GSCR Sect. 2.6.1	Not Tested	
			Auto retrieval and alternate address (C)	GSCR Sect. 2.6.2	Not Tested	
			Bridge release (C)	GSCR Sect. 2.6.3	Not Tested	
			Lost connection (C)	GSCR Sect. 2.6.4	Not Tested	
			Secondary conferencing (C)	GSCR Sect. 2.6.5	Not Tested	
Nailed-Up Connections	No	Not Tested	Address translation (C)	GSCR Sect. 2.7	Not Tested	
			Between any two like terminations (C)	GSCR Sect. 2.8	Not Tested	
			PCM-24 and PCM-30, both CAS and CCS (C)	GSCR Sect. 2.8	Not Tested	
			Supervision passed end-to-end for A/D or D/A (C)	GSCR Sect. 2.8	Not Tested	
			Monitored and auto reconfigure (C)	GSCR Sect. 2.8	Not Tested	
PAT	No	Not Tested	Support at least 10% of circuits as nailed-up (C)	GSCR Sect. 2.8	Not Tested	
			Non-preemptable (C)	GSCR Sect. 2.8	Not Tested	
			Classmark for/not for PAT screening (C)	GSCR Sect. 2.11.1	Not Tested	
			7 PAT mechanisms (C)	GSCR Sect. 2.11.1	Not Tested	
			Outgoing call screening (C)	GSCR Sect. 2.11.1.1	Not Tested	
			Functional structure (C)	GSCR Sect. 2.11.1.2	Not Tested	
			Overflow Process (C)	GSCR Sect. 2.11.1.3	Not Tested	
			Simultaneous calls limitation (C)	GSCR Sect. 2.11.1.4	Not Tested	
			Decrementing call-in-progress count (C)	GSCR Sect. 2.11.1.5	Not Tested	
			Call treatment (C)	GSCR Sect. 2.11.1.6	Not Tested	
DSN hotline services	No	Not Certified	Queuing (C)	GSCR Sect. 2.11.1.7	Not Tested	
			Attendant calls (C)	GSCR Sect. 2.11.1.8	Not Tested	
			Operation measurement registers (C)	GSCR Sect. 2.11.1.9	Not Tested	
			Maintenance and administration of thresholds (C)	GSCR Sect. 2.11.1.10	Not Tested	
			Hotline restrictions (C)	GSCR Sect. 2.12	Not Met	Minor ⁶
			Auto initiate (C)	GSCR Sect. 2.12	Met	
			Analog and digital (C)	GSCR Sect. 2.12	Not Met	Minor ⁶
			Subscription basis (C)	GSCR Sect. 2.12	Not Tested	
			Protected hotline calling (C)	GSCR Sect. 2.12.1-4	Not Met	Minor ⁶
			WWNDP interoperable (C)	GSCR Sect. 2.12.5	Not Met	Minor ⁶

Table 2-4. SUT Interoperability Requirements/Status (continued)

DSN Features & Capabilities (continued)						
Features/ Capabilities	Critical	Status	GSCR Requirement Required (R) Conditional (C)	Reference	Test Results	Operational Impact
Network Management	No	Certified	Interfaces (C)	GSCR Sect. 9.1	Met	
			Measurements and data generation (C)	GSCR Sect. 9.2	Met	
			Fault management (C)	GSCR Sect. 9.3	Met	
			Configuration management (C)	GSCR Sect. 9.4	Met	
			Accounting management (C)	GSCR Sect. 9.5	Met	
			Performance management (C)	GSCR Sect. 9.6	Met	
			NM controls (C)	GSCR Sect. 9.7	Met	
Remote access (C)	GSCR Sect. 9.8	Met				
ISDN services	No	Not Tested	EKTS (C)	GSCR Sect. 10, table 10-3	Not Tested	
Synchronization	Yes	Certified	Line timing mode (R)	GSCR Sect. 11.1.1.2	Met	
			Internal Stratum 4 (R)	GSCR Sect. 11.1.2.2	Met	
Reliability	Yes	Certified	GR-512-CORE (R)	GSCR Sect. 12.2	Met	
Security	Yes	Certified	DITSCAP (R)	GSCR Sect. 13	See note 7.	
VoIP System	No	Not Tested	MOS 4.0 or better (R)	GSCR App. 3	Not Tested	
			G.711 PCM Codec (R)	GSCR App. 3	Not Tested	
			Security in accordance with DITSCAP (R)	GSCR App. 3	Not Tested	
			NM (R)	GSCR App. 3	Not Tested	
			Line timing (R)	GSCR App. 3	Not Tested	
			Internal Clock (R)	GSCR App. 3	Not Tested	
			Latency @60 msec or less (R)	GSCR App. 3	Not Tested	
IPv6 capable (R)	GSCR App. 3	Not Tested				
LANs	No	Not Tested	LAN parameters (R)	GSCR App. 3	Not Tested	
			CoS/QoS (R)	GSCR App. 3	Not Tested	
			VLANs (R)	GSCR App. 3	Not Tested	
			IEEE Standards Conformance (R)	GSCR App. 3	Not Tested	
			.99999 availability (R)	GSCR App. 3	Not Tested	
			Modular devices (R)	GSCR App. 3	Not Tested	
			2 second link restoral (R)	GSCR App. 3	Not Tested	
LAN NM (R)	GSCR App. 3	Not Tested				
			Traffic Engineering (R)	GSCR App. 3	Not Tested	

Table 2-4. SUT Interoperability Requirements/Status (continued)

Network Gateway																																																																																																																																																
Gateway	Critical	Interface Status	GSCR Requirement Required (R) Conditional (C)		Reference	Test Results	Operational Impact																																																																																																																																									
PSTN	No	Certified	Trunking	Positive Identification Control (C)	CJCSI 6215.01B	Met																																																																																																																																										
				On-Netting (C)	CJCSI 6215.01B	Met																																																																																																																																										
				Off-Netting (C)	CJCSI 6215.01B	Met																																																																																																																																										
<p>LEGEND:</p> <table border="0"> <tr> <td>2W</td><td>- 2-Wire</td> <td>GSCR</td><td>- Generic Switching Center Requirements</td> <td>PAT</td><td>- Precedence Access Threshold</td> </tr> <tr> <td>911</td><td>- Emergency 911 Service</td> <td>H.320</td><td>- Standard for narrowband VTC</td> <td>PBX 1</td><td>- Private Branch Exchange 1</td> </tr> <tr> <td>A/D</td><td>- Analog to Digital Conversion</td> <td>IATP</td><td>- Information Assurance Test Plan</td> <td>PCM</td><td>- Pulse Code Modulation</td> </tr> <tr> <td>AMA</td><td>- Automated Message Accounting</td> <td>IEEE</td><td>- Institute of Electrical and Electronics Engineers, Inc.</td> <td>PCM-24</td><td>- Pulse Code Modulation 24 Channels</td> </tr> <tr> <td>ANSI</td><td>- American National Standards Institute</td> <td>IPv6</td><td>- Internet Protocol version 6</td> <td>PCM-30</td><td>- Pulse Code Modulation 30 Channels</td> </tr> <tr> <td>App.</td><td>- Appendix</td> <td>ISDN</td><td>- Integrated Services Digital Network</td> <td>PRI</td><td>- Primary Rate Interface</td> </tr> <tr> <td>BER</td><td>- Bit Error Ratio</td> <td>ITU-T</td><td>- International Telecommunication Union - Telecommunication Standardization Sector</td> <td>PSTN</td><td>- Public Switched Telephone Network</td> </tr> <tr> <td>BRI</td><td>- Basic Rate Interface</td> <td>JITC</td><td>- Joint Interoperability Test Command</td> <td>Q.955.3</td><td>- ISDN signaling standard for E1 MLPP</td> </tr> <tr> <td>C</td><td>- conditional</td> <td>kbps</td><td>- kilobits per second</td> <td>QoS</td><td>- Quality of Service</td> </tr> <tr> <td>CAS</td><td>- Channel Associated Signaling</td> <td>KXX</td><td>- K = any number 2-8, X = any number 1-9</td> <td>R</td><td>- Required</td> </tr> <tr> <td>CCS</td><td>- Common Channel Signaling</td> <td>LAN</td><td>- Local Area Network</td> <td>Sec.</td><td>- Seconds</td> </tr> <tr> <td>CJCSI</td><td>- Chairman of the Joint Chiefs of Staff Instruction</td> <td>LoC</td><td>- Letters of Compliance</td> <td>Sec.</td><td>- Section</td> </tr> <tr> <td>CoS</td><td>- Class of Service</td> <td>Mbps</td><td>- Megabits per second</td> <td>SS7</td><td>- Signaling System 7</td> </tr> <tr> <td>D/A</td><td>- Digital to Analog Conversion</td> <td>MIL-STD</td><td>- Military Standard</td> <td>STE</td><td>- Secure Terminal Equipment</td> </tr> <tr> <td>DISR</td><td>- Department of Defense Information Technology Standards Registry</td> <td>MLPP</td><td>- Multi-Level Precedence & Preemption</td> <td>STU-III</td><td>- Secure Telephone Unit-III</td> </tr> <tr> <td>DITSCAP</td><td>- Department of Defense Information Technology Security and Accreditation Process</td> <td>MOS</td><td>- Mean Opinion Score</td> <td>SUT</td><td>- System Under Test</td> </tr> <tr> <td>DN</td><td>- Directory Number</td> <td>msec</td><td>- Milliseconds</td> <td>T1</td><td>- Digital Transmission Link Level 1 (1.544 Mbps)</td> </tr> <tr> <td>DSN</td><td>- Defense Switched Network</td> <td>NI 1/2</td><td>- National ISDN 1 or 2</td> <td>T1.619a</td><td>- SS7 and ISDN Signaling Standard For T1</td> </tr> <tr> <td>E&M</td><td>- Ear and Mouth</td> <td>NM</td><td>- Network Management</td> <td>TIA</td><td>- Telecommunications Industry Association</td> </tr> <tr> <td>EIA</td><td>- Electronic Industries Alliance</td> <td>NX56</td><td>- Data format restricted to multiples of 56 kbps</td> <td>VBD</td><td>- Variable bit data</td> </tr> <tr> <td>EKTS</td><td>- Electronic Key Telephone System</td> <td>NX64</td><td>- Data format restricted to multiples of 64 kbps</td> <td>VLAN</td><td>- Virtual LAN</td> </tr> <tr> <td>GR</td><td>- Generic Requirement (Telcordia)</td> <td>Op</td><td>- Operations</td> <td>VTC</td><td>- Video Teleconferencing</td> </tr> <tr> <td></td><td></td><td></td><td></td> <td>WWNDP</td><td>- Worldwide Numbering and Dialing Plan</td> </tr> </table>							2W	- 2-Wire	GSCR	- Generic Switching Center Requirements	PAT	- Precedence Access Threshold	911	- Emergency 911 Service	H.320	- Standard for narrowband VTC	PBX 1	- Private Branch Exchange 1	A/D	- Analog to Digital Conversion	IATP	- Information Assurance Test Plan	PCM	- Pulse Code Modulation	AMA	- Automated Message Accounting	IEEE	- Institute of Electrical and Electronics Engineers, Inc.	PCM-24	- Pulse Code Modulation 24 Channels	ANSI	- American National Standards Institute	IPv6	- Internet Protocol version 6	PCM-30	- Pulse Code Modulation 30 Channels	App.	- Appendix	ISDN	- Integrated Services Digital Network	PRI	- Primary Rate Interface	BER	- Bit Error Ratio	ITU-T	- International Telecommunication Union - Telecommunication Standardization Sector	PSTN	- Public Switched Telephone Network	BRI	- Basic Rate Interface	JITC	- Joint Interoperability Test Command	Q.955.3	- ISDN signaling standard for E1 MLPP	C	- conditional	kbps	- kilobits per second	QoS	- Quality of Service	CAS	- Channel Associated Signaling	KXX	- K = any number 2-8, X = any number 1-9	R	- Required	CCS	- Common Channel Signaling	LAN	- Local Area Network	Sec.	- Seconds	CJCSI	- Chairman of the Joint Chiefs of Staff Instruction	LoC	- Letters of Compliance	Sec.	- Section	CoS	- Class of Service	Mbps	- Megabits per second	SS7	- Signaling System 7	D/A	- Digital to Analog Conversion	MIL-STD	- Military Standard	STE	- Secure Terminal Equipment	DISR	- Department of Defense Information Technology Standards Registry	MLPP	- Multi-Level Precedence & Preemption	STU-III	- Secure Telephone Unit-III	DITSCAP	- Department of Defense Information Technology Security and Accreditation Process	MOS	- Mean Opinion Score	SUT	- System Under Test	DN	- Directory Number	msec	- Milliseconds	T1	- Digital Transmission Link Level 1 (1.544 Mbps)	DSN	- Defense Switched Network	NI 1/2	- National ISDN 1 or 2	T1.619a	- SS7 and ISDN Signaling Standard For T1	E&M	- Ear and Mouth	NM	- Network Management	TIA	- Telecommunications Industry Association	EIA	- Electronic Industries Alliance	NX56	- Data format restricted to multiples of 56 kbps	VBD	- Variable bit data	EKTS	- Electronic Key Telephone System	NX64	- Data format restricted to multiples of 64 kbps	VLAN	- Virtual LAN	GR	- Generic Requirement (Telcordia)	Op	- Operations	VTC	- Video Teleconferencing					WWNDP	- Worldwide Numbering and Dialing Plan
2W	- 2-Wire	GSCR	- Generic Switching Center Requirements	PAT	- Precedence Access Threshold																																																																																																																																											
911	- Emergency 911 Service	H.320	- Standard for narrowband VTC	PBX 1	- Private Branch Exchange 1																																																																																																																																											
A/D	- Analog to Digital Conversion	IATP	- Information Assurance Test Plan	PCM	- Pulse Code Modulation																																																																																																																																											
AMA	- Automated Message Accounting	IEEE	- Institute of Electrical and Electronics Engineers, Inc.	PCM-24	- Pulse Code Modulation 24 Channels																																																																																																																																											
ANSI	- American National Standards Institute	IPv6	- Internet Protocol version 6	PCM-30	- Pulse Code Modulation 30 Channels																																																																																																																																											
App.	- Appendix	ISDN	- Integrated Services Digital Network	PRI	- Primary Rate Interface																																																																																																																																											
BER	- Bit Error Ratio	ITU-T	- International Telecommunication Union - Telecommunication Standardization Sector	PSTN	- Public Switched Telephone Network																																																																																																																																											
BRI	- Basic Rate Interface	JITC	- Joint Interoperability Test Command	Q.955.3	- ISDN signaling standard for E1 MLPP																																																																																																																																											
C	- conditional	kbps	- kilobits per second	QoS	- Quality of Service																																																																																																																																											
CAS	- Channel Associated Signaling	KXX	- K = any number 2-8, X = any number 1-9	R	- Required																																																																																																																																											
CCS	- Common Channel Signaling	LAN	- Local Area Network	Sec.	- Seconds																																																																																																																																											
CJCSI	- Chairman of the Joint Chiefs of Staff Instruction	LoC	- Letters of Compliance	Sec.	- Section																																																																																																																																											
CoS	- Class of Service	Mbps	- Megabits per second	SS7	- Signaling System 7																																																																																																																																											
D/A	- Digital to Analog Conversion	MIL-STD	- Military Standard	STE	- Secure Terminal Equipment																																																																																																																																											
DISR	- Department of Defense Information Technology Standards Registry	MLPP	- Multi-Level Precedence & Preemption	STU-III	- Secure Telephone Unit-III																																																																																																																																											
DITSCAP	- Department of Defense Information Technology Security and Accreditation Process	MOS	- Mean Opinion Score	SUT	- System Under Test																																																																																																																																											
DN	- Directory Number	msec	- Milliseconds	T1	- Digital Transmission Link Level 1 (1.544 Mbps)																																																																																																																																											
DSN	- Defense Switched Network	NI 1/2	- National ISDN 1 or 2	T1.619a	- SS7 and ISDN Signaling Standard For T1																																																																																																																																											
E&M	- Ear and Mouth	NM	- Network Management	TIA	- Telecommunications Industry Association																																																																																																																																											
EIA	- Electronic Industries Alliance	NX56	- Data format restricted to multiples of 56 kbps	VBD	- Variable bit data																																																																																																																																											
EKTS	- Electronic Key Telephone System	NX64	- Data format restricted to multiples of 64 kbps	VLAN	- Virtual LAN																																																																																																																																											
GR	- Generic Requirement (Telcordia)	Op	- Operations	VTC	- Video Teleconferencing																																																																																																																																											
				WWNDP	- Worldwide Numbering and Dialing Plan																																																																																																																																											
<p>NOTES:</p> <ol style="list-style-type: none"> The SUT does not meet the GSCR capability requirements for restoral to service from a local red alarm. SUT takes 30 seconds to recover versus the required 15 seconds, plus or minus 5 seconds. The operational impact is minor. ISDN T1 PRI trunkgroups using NI 2 protocol send a Release Complete Message in lieu of a Disconnect Message with Cause 46 (Unavailable Resources). The operational impact is minor since the user still receives a Blocked Precedence Announcement. Analog E&M Signaling Type 1 did not pass the DSN preempt signals as required by the GSCR for the four types of preemption. Analog E&M Signaling Type 1 is not certified for use in the DSN. Analog E&M Signaling Type 1 is not a critical interface requirement for a PBX 1. The operational impact is minor. Analog instruments do not provide intra-switch call waiting. The operational impact is minor. The SUT's attendant console does not support automatic recall of attendant. The operational impact is minor. The SUT does not meet the GSCR capability requirements for hotline services. Hotline services are not a critical requirement for a PBX 1. The operational impact is minor. JITC verifies security via vendor LoC. Further testing in accordance with the IATP is required prior to being authorized connection approval. This testing is done by Defense Information Systems Agency Information Assurance test teams and published in a separate report. 																																																																																																																																																

Table 3-1. SUT Product Enhancement Packages

Core Software Patch List		
Patch ID Number	CR Number	Description
MPLR17817	Q00758895	DSN: Tandem ATVN MCDN trunk 2nd call fails after preemption
MPLR18070	Q00786849	Preemption of a partially dialed routine precedence call
MPLR18220	Q00802114	DSN: Bug 30 messages during Tandem calls
MPLR18263	Q00817316	Option 11C switch reinitializes due to CDR-Q procedure
MPLR18302	Q00841477	NI2 DID Tandem to ATVN
MPLR18622	Q00888789	This patch was developed to suppress password information on the switches in LD 22.
MPLR18870 Issue 3	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
MPLR20223 Issue 1	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
MPLR 20305 Issue	NA	This patch was developed to meet the E1 ISDN PRI and E1 CAS interface requirements.
LEGEND: ATVN - Autovon CAS - Channel Associated Signaling CDR-Q - Call Detail Recording-Queue CR - Call Report DID - Direct Inward Dial DSN - Defense Switched Network E1 - European Basic Multiplex Rate (2.048 Mbps) ID - Identification ISDN - Integrated Services Digital Network LD - Overlay Mbps - Megabits per second MCDN - Meridian Customer Defined Network MPLR - Meridian Patch Library Reference NA - Not Applicable NI 2 - National ISDN 2 PRI - Primary Rate Interface SUT - System Under Test		
NOTE: This certification specifically covers regression testing of newly product enhancement packages in bold . The other packages were tested and covered under a certification letter that was signed on 16 July 2004.		