



**DEFENSE INFORMATION SYSTEMS AGENCY**  
**JOINT INTEROPERABILITY TEST COMMAND**  
**2001 BRAINARD ROAD**  
**FORT HUACHUCA, ARIZONA 85613-7051**

IN REPLY  
REFER TO: Networks, Transmission and  
Integration Division (JTE)

8 Dec 03

MEMORANDUM FOR DISTRIBUTION

SUBJECT: Joint Interoperability Test Certification of Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2

References: (a) DOD Directive 4630.5, "Interoperability and Supportability of Information Technology (IT) and National Security Systems (NSS)," 11 January 2002  
(b) CJCSI 6212.01B, "Interoperability and Supportability of National Security Systems and Information Technology Systems," 8 May 2000

1. References (a) and (b) establish the Defense Information Systems Agency, Joint Interoperability Test Command (JITC), as the responsible organization for interoperability test certification. Additional references are provided in enclosure 1.

2. The Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2, hereafter referred to as the system under test (SUT), met all of its critical interoperability requirements, and is certified as interoperable for joint use within the Defense Switched Network (DSN). The identified test discrepancies shown in enclosure 2 that remained open after software patches were applied and regression testing was completed have an overall minor operational impact. The SUT was tested and met the critical interoperability requirements for the following DSN switch types: Private Branch Exchange (PBX) 1 and PBX 2. This certification expires upon changes that could affect interoperability, but no later than three years from the date of this memorandum.

3. This finding is based on interoperability testing conducted by the JITC. Testing was conducted at the JITC facility at Ft. Huachuca, AZ from October 15 through December 13, 2002. The Certification Testing Summary (enclosure 2) documents the test results and describes the tested network and systems configurations. System interoperability should be verified before deployment in an operational environment that varies significantly from the test environment.

4. The interoperability summary of the SUT is indicated in table 1. The interoperability status and criticality are listed in table 2, and the Exchange Requirements (ERs) and Functional

JITC Memo, Networks, Transmission and Integration Division (JTE), Joint Interoperability Test Certification of Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2

Requirements (FRs) for the DSN are listed in table 3. The Avaya switch product line offers a Remote Switch Unit capability referred to as the Survivable Remote Processor Expansion Port Network. This product line also offers a Voice over Internet Protocol capability. Preliminary testing was performed on these capabilities, but neither is covered by this certification. This interoperability test status is based upon evaluation of:

- a. The following network interfaces as specified in reference (c): DSN, Public Switched Telecommunications Network or Commercial Network Gateway.
- b. The interface and signaling requirements for trunk/line interfaces, and interoperability ERs and FRs derived from references (d) and (e).
- c. The overall system interoperability performance derived from test procedures listed in reference (f).
- d. A review of the Letters of Compliance submitted by Avaya.

**Table 1. Avaya MultiVantage G3CSI Digital Switching System Interoperability Summary**

Network	Critical	Status	Remarks
DSN	Yes	Certified	- VoIP not certified - Certified as PBX1 and PBX2 - RSU not certified - E1 CAS and CDC certified (DISN-E only) - The identified test discrepancies shown in enclosure 2 that remained open have an overall minor operational impact.
Commercial Network Gateway	No	Certified	
<b>Legend:</b>			
CAS	- Channel Associated Signaling	Mbps	- Megabits per second
CDC	- Common Data Channel	PBX1	- Private Branch Exchange 1
DISN-E	- Defense Information System Network Europe	PBX2	- Private Branch Exchange 2
DSN	- Defense Switched Network	RSU	- Remote Switching Unit
E1	- European Basic Rate (2.048 Mbps)	VoIP	- Voice over Internet Protocol

**Table 2. Interoperability Status**

	Trunk Interfaces			
	Interface & Signaling	Critical	Status	Remarks
<b>Defense Switched Network</b>	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DTMF	No	Certified	Met all ERs and FRs.
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS MFR1	No	Certified	Met all ERs and FRs.
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DP	No	Certified	Met all ERs and FRs.
	PCM-30 E1 CAS HDB3 MFR1	No	Certified	Met all ERs and FRs.
	PCM-24 T1 (B8ZS/ESF) ISDN PRI	Yes	Certified	Met all critical ERs and FRs. Full compliance to the ANSI T1.619a requirement not met. <sup>1</sup> Operational impact is minor.
	Analog E&M Signaling Type 1	No	Certified	Met all ERs and FRs.

JITC Memo, Networks, Transmission and Integration Division (JTE), Joint Interoperability Test Certification of Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2

**Table 2. Interoperability Status (continued)**

	Line Interfaces																																							
	Interface & Signaling	Critical	Status	Remarks																																				
<b>Defense Switched Network (continued)</b>	TPC ISDN BRI ST and U Interface Q.931	Yes	Certified	Met all critical ERs and FRs. ISDN Supplemental Services <sup>2</sup> and full compliance of DSN Announcements <sup>3</sup> not met. Operational impact is minor.																																				
	TPC 2-Wire Analog	Yes	Certified	Met all critical ERs and FRs. Full compliance of DSN Announcements <sup>3</sup> not met. Operational impact is minor.																																				
	TPC 2-Wire Digital (Proprietary)	No	Certified	Met all ERs and FRs except for full compliance of DSN Announcements <sup>3</sup> . Operational impact is minor.																																				
	Network Management Interfaces																																							
	Interface & Signaling	Critical	Status	Remarks																																				
	CAT 5 TPC IEEE 802.3 10BaseT Ethernet, TCP/IP	No	Certified	Met all ERs and FRs.																																				
	TPC EIA232 Asynchronous @ 9.6 kbps	No	Certified	Met all ERs and FRs.																																				
<b>Commercial Network Gateway</b>	Trunk Interfaces																																							
	Interface & Signaling	Critical	Status	Remarks																																				
Same Interfaces and Signaling as DSN	No	Certified	See note 4.																																					
<p><b>Legend:</b></p> <table border="0"> <tr> <td>10BaseT - Ethernet Based Operation, Twisted Pair</td> <td>GSTP - Generic Switch Test Plan</td> </tr> <tr> <td>AMI - Alternate Mark Inversion</td> <td>HDB3 - High Density Bi-polar Three</td> </tr> <tr> <td>ANSI - American National Standards Institute</td> <td>IEEE - Institute of Electrical and Electronic Engineers, Inc.</td> </tr> <tr> <td>B8ZS - Bipolar Eight Zero Substitution</td> <td>ISDN - Integrated Services Digital Network</td> </tr> <tr> <td>BRI - Basic Rate Interface</td> <td>kbps - kilobits per second</td> </tr> <tr> <td>CAS - Channel Associated Signaling</td> <td>Mbps - Megabits per second</td> </tr> <tr> <td>CAT - Category</td> <td>MFR1 - Multi-Frequency R1</td> </tr> <tr> <td>DISN - Defense Information Systems Network</td> <td>PCM-24 - Pulse Code Modulation 24 Channels</td> </tr> <tr> <td>DP - Dial Pulse</td> <td>PCM-30 - Pulse Code Modulation 30 Channels</td> </tr> <tr> <td>DSN - Defense Switched Network</td> <td>PRI - Primary Rate Interface</td> </tr> <tr> <td>DTMF - Dual Tone Multi-Frequency</td> <td>SF - Superframe</td> </tr> <tr> <td>E1 - European Basic Rate (2.048 Mbps)</td> <td>ST - ISDN BRI Four-Wire Interface</td> </tr> <tr> <td>E&amp;M - Ear and Mouth</td> <td>T1 - Digital Transmission Link level 1 (1.544 Mbps)</td> </tr> <tr> <td>EIA - Electronic Industries Alliance</td> <td>TCP/IP - Transmission Control Protocol/Internet Protocol</td> </tr> <tr> <td>ERs - Exchange Requirements</td> <td>TPC - Twisted Pair Copper</td> </tr> <tr> <td>ESF - Extended Superframe</td> <td>U - ISDN BRI Two-Wire Interface</td> </tr> <tr> <td>FRs - Functional Requirements</td> <td></td> </tr> <tr> <td>GSCR - Generic Switching Center Requirements</td> <td></td> </tr> </table> <p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>The MultiVantage Avaya G3CSI will not allow calls between unlike DSN service domains when resources are available. The Avaya MultiVantage G3CSI meets the minimum requirements defined in reference (g). The operational impact is minor.</li> <li>ISDN Supplemental Services are currently not used in the DISN. The operational impact is none.</li> <li>Met all DSN Announcement requirements except for Isolation Code Announcement. The Avaya MultiVantage G3CSI provides this announcement only for precedence calls above ROUTINE. ROUTINE precedence calls receive a fast busy signal.</li> <li>The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP and specified in tables 2-1 through 2-15 of the GSCR.</li> </ol>					10BaseT - Ethernet Based Operation, Twisted Pair	GSTP - Generic Switch Test Plan	AMI - Alternate Mark Inversion	HDB3 - High Density Bi-polar Three	ANSI - American National Standards Institute	IEEE - Institute of Electrical and Electronic Engineers, Inc.	B8ZS - Bipolar Eight Zero Substitution	ISDN - Integrated Services Digital Network	BRI - Basic Rate Interface	kbps - kilobits per second	CAS - Channel Associated Signaling	Mbps - Megabits per second	CAT - Category	MFR1 - Multi-Frequency R1	DISN - Defense Information Systems Network	PCM-24 - Pulse Code Modulation 24 Channels	DP - Dial Pulse	PCM-30 - Pulse Code Modulation 30 Channels	DSN - Defense Switched Network	PRI - Primary Rate Interface	DTMF - Dual Tone Multi-Frequency	SF - Superframe	E1 - European Basic Rate (2.048 Mbps)	ST - ISDN BRI Four-Wire Interface	E&M - Ear and Mouth	T1 - Digital Transmission Link level 1 (1.544 Mbps)	EIA - Electronic Industries Alliance	TCP/IP - Transmission Control Protocol/Internet Protocol	ERs - Exchange Requirements	TPC - Twisted Pair Copper	ESF - Extended Superframe	U - ISDN BRI Two-Wire Interface	FRs - Functional Requirements		GSCR - Generic Switching Center Requirements	
10BaseT - Ethernet Based Operation, Twisted Pair	GSTP - Generic Switch Test Plan																																							
AMI - Alternate Mark Inversion	HDB3 - High Density Bi-polar Three																																							
ANSI - American National Standards Institute	IEEE - Institute of Electrical and Electronic Engineers, Inc.																																							
B8ZS - Bipolar Eight Zero Substitution	ISDN - Integrated Services Digital Network																																							
BRI - Basic Rate Interface	kbps - kilobits per second																																							
CAS - Channel Associated Signaling	Mbps - Megabits per second																																							
CAT - Category	MFR1 - Multi-Frequency R1																																							
DISN - Defense Information Systems Network	PCM-24 - Pulse Code Modulation 24 Channels																																							
DP - Dial Pulse	PCM-30 - Pulse Code Modulation 30 Channels																																							
DSN - Defense Switched Network	PRI - Primary Rate Interface																																							
DTMF - Dual Tone Multi-Frequency	SF - Superframe																																							
E1 - European Basic Rate (2.048 Mbps)	ST - ISDN BRI Four-Wire Interface																																							
E&M - Ear and Mouth	T1 - Digital Transmission Link level 1 (1.544 Mbps)																																							
EIA - Electronic Industries Alliance	TCP/IP - Transmission Control Protocol/Internet Protocol																																							
ERs - Exchange Requirements	TPC - Twisted Pair Copper																																							
ESF - Extended Superframe	U - ISDN BRI Two-Wire Interface																																							
FRs - Functional Requirements																																								
GSCR - Generic Switching Center Requirements																																								

**Table 3. Exchange and Functional Requirements**

	<b>Trunk Interfaces</b>	
	<b>Interface &amp; Signaling</b>	<b>Exchange &amp; Functional Requirements</b>
<b>Defense Switched Network</b>	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DTMF	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- System Interface                             <ul style="list-style-type: none"> <li>• Non-secure Voice and Data</li> <li>• Secure Voice and Data (STU-III and STE)</li> <li>• NX56 kbps and NX64 kbps Synchronous Data</li> <li>• Non-secure and Secure FAX</li> <li>• VTC</li> <li>• Alarms</li> </ul> </li> <li>- Integrated Services Digital Network (<i>ISDN PRI only</i>)</li> <li>- Attendant Services<sup>1</sup></li> <li>- System Administration, Measurements, and Service Standards</li> <li>- Y2K (Rollover, Valid and Invalid Dates)</li> <li>- Screening, Zone Restriction, and DSN Access Restriction</li> <li>- Automated Message Accounting</li> <li>- Network Integration</li> <li>- Common Data Channel (<i>T1 and E1 CAS only</i>)</li> <li>- ANSI T1.619a (<i>T1 ISDN PRI</i>)</li> </ul>
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS MFR1	
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DP	
	PCM-30 E1 CAS HDB3 MFR1	
	PCM-24 T1 B8ZS/ESF ISDN PRI	
	Analog E&M Signaling Type I	
	<b>Line Interfaces</b>	
	<b>Interface &amp; Signaling</b>	<b>Exchange &amp; Functional Requirements</b>
	TPC ISDN BRI ST and U Interface Q.931	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- ANSI T1.619a</li> <li>- ISDN Supplemental Services</li> <li>- Call Treatments</li> <li>- DSN Announcements</li> <li>- Attendant Services<sup>1</sup></li> <li>- EKTS</li> <li>- VTC</li> <li>- NX56 kbps and NX64 kbps Synchronous Data</li> <li>- Non-secure Voice and Data</li> <li>- Secure Voice and Data (STE)</li> </ul>
	TPC 2-Wire Analog	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- DSN Announcements</li> <li>- Traffic Measurements</li> <li>- Attendant Services<sup>1</sup></li> <li>- Call Treatments</li> <li>- Non-secure Voice and Data</li> <li>- Non-secure and Secure FAX</li> <li>- Secure Voice and Data (STU-III and STE)</li> </ul>
TPC 2-Wire Digital and Analog (Proprietary)	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- DSN Announcements</li> <li>- Traffic Measurements</li> <li>- Attendant Services<sup>1</sup></li> <li>- Call Treatments</li> <li>- Non-secure Voice</li> </ul>	

**Table 3. Exchange and Functional Requirements (continued)**


Defense Switched Network (continued)	Network Management Interfaces	
	Interface & Signaling	Exchange & Functional Requirements
	CAT 5 TPC IEEE 802.3 10BaseT Ethernet, TCP/IP	<ul style="list-style-type: none"> <li>- Automated Message Accounting</li> <li>- Traffic Measurements</li> <li>- Man Machine Language</li> <li>- Alarms</li> </ul>
TPC EIA232 Asynchronous @ 9.6 kbps	<ul style="list-style-type: none"> <li>- Automated Message Accounting</li> <li>- Traffic Measurements</li> <li>- Man Machine Language</li> </ul>	
Commercial Network Gateway	Trunk Interfaces	
	Interface & Signaling	Exchange & Functional Requirements
	Same Interfaces and Signaling as DSN	See note 2.
<b>Legend:</b> 10BaseT - Ethernet Based Operation, Twisted Pair AMI - Alternate Mark Inversion ANSI - American National Standards Institute B8ZS - Bipolar Eight Zero Substitution BRI - Basic Rate Interface CAS - Channel Associated Signaling CAT - Category DP - Dial Pulse DSN - Defense Switched Network DTMF - Dual Tone Multi-Frequency E1 - European Basic Rate (2.048 Mbps) E&M - Ear and Mouth EKTS - Electronic Key Telephone Service ESF - Extended Superframe FAX - Facsimile GSCR - Generic Switching Center Requirements GSTP - Generic Switch Test Plan HDB3 - High Density Bi-polar Three IEEE - Institute of Electrical and Electronic Engineers Inc. ISDN - Integrated Services Digital Network kbps - kilobits per second Mbps - Megabits per second MFR1 - Multi-Frequency R1 MLPP - Multi-Level Precedence and Preemption NX56 - Data format is restricted to multiples of 56k NX64 - Data format is restricted to multiples of 64k PCM-24 - Pulse Code Modulation 24 Channels PCM-30 - Pulse Code Modulation 30 Channels PRI - Primary Rate Interface RS - Recommended Standard SF - Superframe ST - ISDN BRI Four-Wire Interface STE - Secure Terminal Equipment STU-III - Secure Telephone Unit-III SUT - System Under Test T1 - Digital Transmission Link level 1 (1.544 Mbps) TCP/IP - Transmission Control Protocol/Internet Protocol TPC - Twisted Pair Copper U - ISDN BRI Two-Wire Interface VTC - Video Teleconferencing Y2K - Year 2000		
<b>Notes:</b> 1 SUT meets all the GSCR exchange requirements for attendant services with the following console: Lucent Attendant Console Model 302C. 2 The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP and specified in tables 2-1 through 2-15 of the GSCR.		

5. JITC distributes interoperability information via the JITC Electronic Report Distribution (ERD) system -- ERD uses unclassified (NIPRNET) e-mail. More comprehensive interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/gov users on the NIPRNET at <https://stp.fhu.disa.mil/>. Test reports, lessons learned, and related testing documents and references are on the JITC Joint Interoperability Tool (JIT) at <http://jit.fhu.disa.mil> (NIPRNET), or <http://199.208.204.125/> (SIPRNET). Information related to DSN testing is on the Telecom Switched Services Interoperability (TSSI) website at <http://jitc.fhu.disa.mil/tssi>.

JITC Memo, Networks, Transmission and Integration Division (JTE), Joint Interoperability Test Certification of Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2

6. The JITC point of contact is Mr. John Gese, DSN 879-5164, commercial (520) 538-5164, FAX DSN 879-4347 or e-mail to gesej@fhu.disa.mil.

FOR THE COMMANDER:



- 2 Enclosures:
- 1 Additional References
- 2 Certification Testing Summary

LESLIE F. CLAUDIO  
Chief  
Networks, Transmission and  
Integration Division

Distribution:

Joint Staff J6I, Room-1E833, Pentagon, Washington, DC 20318-6000

Joint Staff J6E, Room-1E834, Pentagon, Washington, DC 20318-6000

Joint Interoperability Test Command, Washington Operations Division, NSWC, ATTN: JTCA-IPTP, Building 900, 101 Strauss Avenue, Indian Head, MD 20640-5035

Defense Information Systems Agency, Interoperability Directorate, Technical Interoperability Assessment Branch, ATTN: Code IN11, 5600 Columbia Pike, Suite 240, Falls Church, VA 22041

Office of Chief of Naval Operations (N612T2), 2000 Navy Pentagon, Washington, DC 20350

Deputy Chief of Staff for Communications and Information, AF/XI, 1250 Air Force Pentagon, Washington, DC 20330-1250

Department of the Army, Office of the Secretary of the Army, CIO/G6, Office Symbol SAIS-IOE-A, 107 Army Pentagon DISC4, Washington, DC 20310

Commander, MARCORSYSCOM, Code SE&I, Suite 315, 2033 Barnett Avenue, Quantico, VA 22134-5010

JS-J38, JCS, Pentagon, Washington, DC 20318

Defense Intelligence Agency/DS-CIO, Building 6000, Bolling AFB, Washington, DC 20340-3342

DOT&E, Strategic and C3I Systems, 1700 Defense Pentagon, Washington, DC 20301-1700

United States Coast Guard, COMDT/G-SCE (C4), 2100 2nd Street SW, Washington, DC 20593

Office of Assistant Secretary of Defense, C3I (C4ISR & Space Programs)/C3 Directorate,

Crystal Mall 3, 7th Floor, Suite 7035, 1931 Jefferson Davis Highway, Arlington, VA 22202

Deputy Director for I/O Testing, Office of Under Secretary of Defense, AT&L Interoperability, Room 3E144, Pentagon, Washington, DC 20301

United States Joint Forces Command, J6I, C4 Plans and Policy, 1562 Mitscher Ave, Norfolk, VA 23551-2488


Commander, Defense Information Systems Agency (DISA), ATTN: NS53 (Mr. Osman), Room 5w23, 5275 Leesburg Pike (RTE 7) Falls Church, VA 22041

## **ADDITIONAL REFERENCES**

- (c) Chairman of the Joint Chiefs of Staff Instruction (CJCSI) 6215.01B, "Policy for Department of Defense Voice Services," 23 September 2001
- (d) Defense Information Systems Agency (DISA), Joint Interoperability and Engineering Organization (JIEO), Technical Report 8249, "Defense Information Systems Network (DISN) Circuit Switched Subsystem, Defense Switched Network (DSN) Generic Switching Center Requirements (GSCR)," March 1997
- (e) Defense Information Systems Agency (DISA) NS53, Memorandum, "DSN Global Network Requirements for Small End Office and Private Branch Exchange Category of Switches," 18 March 2003
- (f) Joint Interoperability Test Command, "Defense Switched Network Generic Switch Test Plan (GSTP)," 17 June 1999
- (g) Defense Information Systems Agency (DISA) NS53, Memorandum, "DSN Global Network Requirements for Tandem (Standalone), Multifunction, End Office, and Small End Office Switches," 30 January 2003

## CERTIFICATION TESTING SUMMARY

- 1. SYSTEM TITLE.** Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with Software Release R011x.7585.7.0.2 (hereafter referred to as the system under test [SUT]).
- 2. PROPONENT.** Defense Information Systems Agency (DISA).
- 3. PROGRAM MANAGER.** Mr. Howard Osman, NS53, Room 5W23, 5275 Leesburg Pike, Falls Church, VA 22041, E-mail: Osmanh@ncr.disa.mil.
- 4. TESTERS.** Joint Interoperability Test Command (JITC), Fort Huachuca, AZ.
- 5. SYSTEM UNDER TEST DESCRIPTION.** The Avaya MultiVantage G3CSI (ProLogix) Digital Switching System has the maximum capacity of up to 600 ports. It supports a maximum of 500 lines and 400 trunks. As sophisticated as the larger DEFINITY switches, this switch provides call processing business applications such as voice messaging, shared voice mail, small call center-networking capabilities, and expert systems for remote diagnostics and self-healing. The Avaya switch product line offers a Remote Switch Unit capability referred to as the Survivable Remote Processor Expansion Port Network. This product line also offers Voice over Internet Protocol capability. Preliminary testing was performed on these capabilities, but neither is covered by this certification. Avaya's product line of digital switches is currently in use within the Defense Switched Network (DSN) providing Small End Office Switch and Private Branch Exchange (PBX) functionality.
- 6. OPERATIONAL ARCHITECTURE.** The Generic Switching Center Requirements operational DSN Architecture is depicted in figure 2-1.

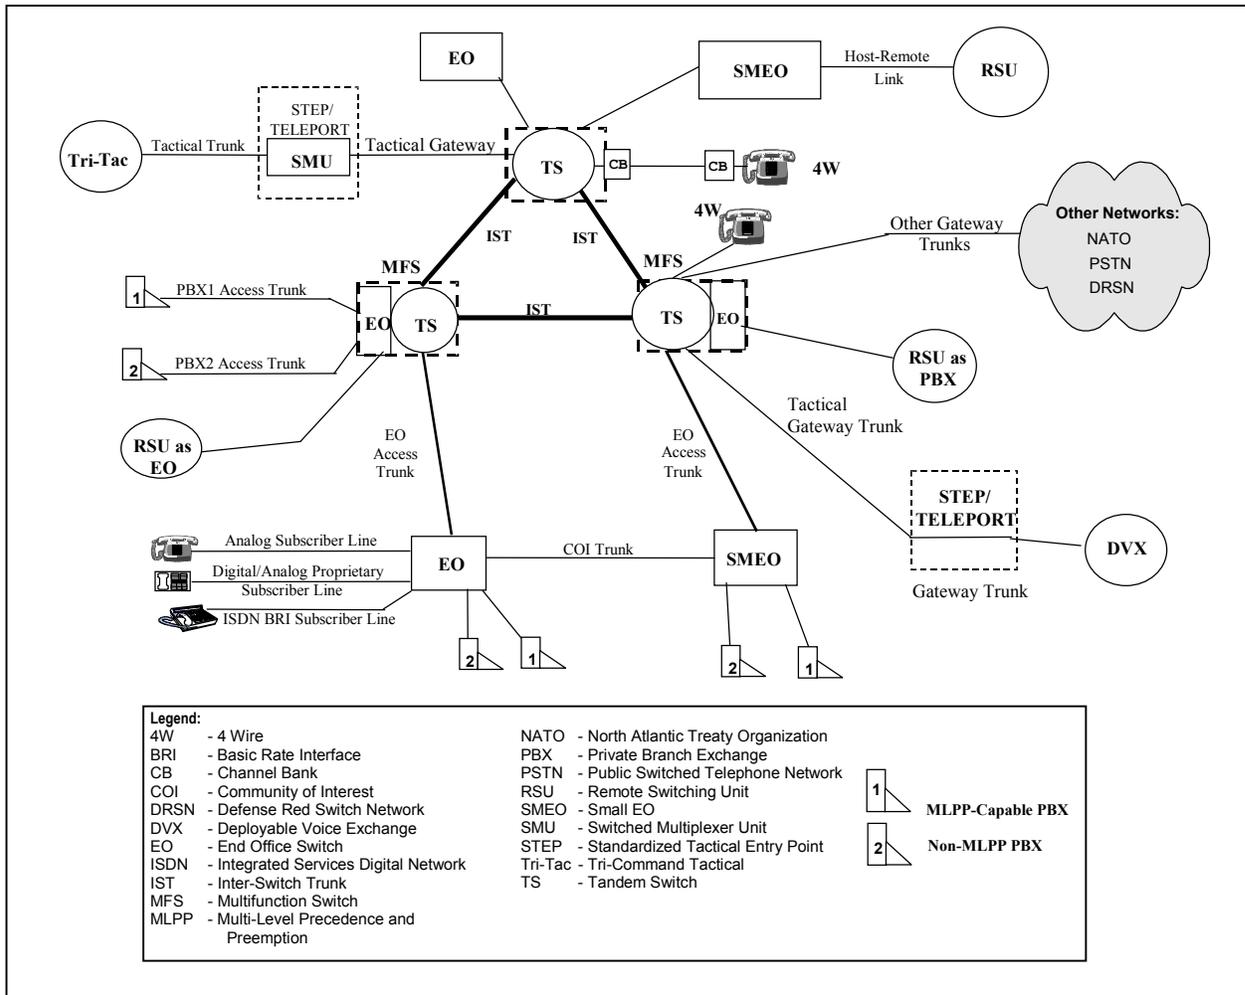

**Figure 2-1. DSN Architecture**

**7. REQUIRED SYSTEM INTERFACES.** This interoperability test status is based upon evaluation of the network interfaces as specified in:

- a. The Chairman of the Joint Chiefs of Staff Instructions (CJCSI) 6215.01B, policy for Department of Defense voice services requirements for the DSN.
- b. Interface and signaling requirements for trunk, line, and network management derived from the Generic Switching Center Requirements (GSCR) document, and DISA Network Services (NS) 53, Memorandum, "DSN Global Network Requirements for Small End Office and Private Branch Exchange Category of Switches," dated 18 March 2003.
- c. Interoperability Exchange Requirements (ERs) and Functional Requirements (FRs) derived from the GSCR.

d. The overall system interoperability performance derived from the Generic Switch Test Plan (GSTP).

The ERs and FRs for the DSN network interfaces are indicated in table 2-1. The criticality and certification status of these interfaces can be found in paragraph 11. The test summary can be found in paragraph 11b.

**Table 2-1. Exchange and Functional Requirements**

	Trunk Interfaces		
	Interface & Signaling	Critical	Exchange and Functional Requirements
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DTMF	No	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- System Interface               <ul style="list-style-type: none"> <li>• Non-secure Voice and Data</li> <li>• Secure Voice and Data (STU-III and STE)</li> <li>• NX56 kbps and NX64 kbps Synchronous Data</li> <li>• Non-secure and Secure FAX</li> <li>• VTC</li> <li>• Alarms</li> </ul> </li> <li>- Integrated Services Digital Network <b>(ISDN PRI only)</b></li> <li>- Attendant Services<sup>1</sup></li> <li>- System Administration, Measurements, and Service Standards</li> <li>- Y2K (Rollover, Valid and Invalid Dates)</li> <li>- Screening, Zone Restriction, and DSN Access Restriction</li> <li>- Automated Message Accounting</li> <li>- Network Integration</li> <li>- Common Data Channel <b>(T1 and E1 CAS only)</b></li> <li>- ANSI T1.619a <b>(T1 ISDN PRI only)</b></li> </ul>
PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS MFR1	No		
PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DP	No		
PCM-30 E1 CAS HDB3 MFR1	No		
PCM-24 T1 B8ZS/ESF ISDN PRI	Yes		
Analog E&M Signaling Type I	No		
Defense Switched Network	Line Interfaces		
	Interface & Signaling	Critical	Exchange and Functional Requirements
	TPC ISDN BRI ST and U Interface Q.931	Yes	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- ANSI T1.619a</li> <li>- ISDN Supplemental Services</li> <li>- Call Treatments</li> <li>- DSN Announcements</li> <li>- Attendant Services<sup>1</sup></li> <li>- EKTS</li> <li>- VTC</li> <li>- NX56 kbps and NX64 kbps Synchronous Data</li> <li>- Non-secure Voice and Data</li> <li>- Secure Voice and Data (STE)</li> </ul>
	TPC 2-Wire analog	Yes	<ul style="list-style-type: none"> <li>- MLPP</li> <li>- Hotline Services</li> <li>- DSN Announcements</li> <li>- Traffic Measurements</li> <li>- Attendant Services<sup>1</sup></li> <li>- Call Treatments</li> <li>- Non-secure Voice and Data</li> <li>- Non-secure and Secure FAX</li> <li>- Secure Voice and Data (STU-III and STE)</li> </ul>

**Table 2-1. Exchange and Functional Requirements (continued)**

Defense Switched Network (continued)	Line Interfaces																																								
	Interface & Signaling	Critical	Exchange and Functional Requirements																																						
	TPC 2-Wire Digital and Analog (Proprietary)	No	- MLPP - Hotline Services - DSN Announcements - Traffic Measurements - Attendant Services <sup>1</sup> - Call Treatments - Non-secure Voice																																						
Network Management Interfaces																																									
Interface & Signaling	Critical	Exchange and Functional Requirements																																							
CAT 5 TPC IEEE 802.3 10BaseT Ethernet, TCP/IP	No	- Automated Message Accounting - Traffic Measurements																																							
TPC EIA232 Asynchronous @ 9.6 kbps	No	- Alarms ( <i>TCP/IP interface only</i> ) - Man Machine Language																																							
Commercial Network Gateway	Interface & Signaling	Critical	Exchange and Functional Requirements																																						
	Same Interfaces and Signaling as DSN	Yes	See note 2.																																						
<p><b>Legend:</b></p> <table border="0"> <tr> <td>10BaseT - Ethernet Based Operation, Twisted Pair</td> <td>ISDN - Integrated Services Digital Network</td> </tr> <tr> <td>AMI - Alternate Mark Inversion</td> <td>kbps - kilobits per second</td> </tr> <tr> <td>ANSI - American National Standards Institute</td> <td>Mbps - Megabits per second</td> </tr> <tr> <td>B8ZS - Bipolar Eight Zero Substitution</td> <td>MFR1 - Multi-Frequency R1</td> </tr> <tr> <td>BRI - Basic Rate Interface</td> <td>MLPP - Multi-Level Precedence and Preemption</td> </tr> <tr> <td>CAS - Channel Associated Signaling</td> <td>PCM-24 - Pulse Code Modulation 24 Channels</td> </tr> <tr> <td>CAT - Category</td> <td>PCM-30 - Pulse Code Modulation 30 Channels</td> </tr> <tr> <td>DP - Dial Pulse</td> <td>PRI - Primary Rate Interface</td> </tr> <tr> <td>DSN - Defense Switched Network</td> <td>SF - Superframe</td> </tr> <tr> <td>DTMF - Dual Tone Multi-Frequency</td> <td>ST - ISDN BRI Four-Wire Interface</td> </tr> <tr> <td>E1 - European Basic Rate (2.048 Mbps)</td> <td>STE - Secure Terminal Equipment</td> </tr> <tr> <td>E&amp;M - Ear and Mouth</td> <td>STU-III - Secure Telephone Unit III</td> </tr> <tr> <td>EKTS - Electronic Key Telephone Service</td> <td>SUT - System Under Test</td> </tr> <tr> <td>ESF - Extended Superframe</td> <td>T1 - Digital Transmission Link level 1 (1.544 Mbps)</td> </tr> <tr> <td>FAX - Facsimile</td> <td>TCP/IP - Transmission Control Protocol/Internet Protocol</td> </tr> <tr> <td>GSCR - Generic Switching Center Requirements</td> <td>TPC - Twisted Pair Copper</td> </tr> <tr> <td>GSTP - Generic Switch Test Plan</td> <td>U - ISDN BRI Two-Wire Interface</td> </tr> <tr> <td>HDB3 - High Density Bipolar Three</td> <td>VTC - Video Teleconferencing</td> </tr> <tr> <td>IEEE - Institute of Electrical and Electronics Engineers, Inc.</td> <td>Y2K - Year 2000</td> </tr> </table> <p><b>Notes:</b></p> <p>1 SUT meets all the GSCR exchange requirements for attendant services with the following console: Lucent Attendant Console Model 302C.</p> <p>2 The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP and specified in tables 2-1 through 2-15 of the GSCR.</p>				10BaseT - Ethernet Based Operation, Twisted Pair	ISDN - Integrated Services Digital Network	AMI - Alternate Mark Inversion	kbps - kilobits per second	ANSI - American National Standards Institute	Mbps - Megabits per second	B8ZS - Bipolar Eight Zero Substitution	MFR1 - Multi-Frequency R1	BRI - Basic Rate Interface	MLPP - Multi-Level Precedence and Preemption	CAS - Channel Associated Signaling	PCM-24 - Pulse Code Modulation 24 Channels	CAT - Category	PCM-30 - Pulse Code Modulation 30 Channels	DP - Dial Pulse	PRI - Primary Rate Interface	DSN - Defense Switched Network	SF - Superframe	DTMF - Dual Tone Multi-Frequency	ST - ISDN BRI Four-Wire Interface	E1 - European Basic Rate (2.048 Mbps)	STE - Secure Terminal Equipment	E&M - Ear and Mouth	STU-III - Secure Telephone Unit III	EKTS - Electronic Key Telephone Service	SUT - System Under Test	ESF - Extended Superframe	T1 - Digital Transmission Link level 1 (1.544 Mbps)	FAX - Facsimile	TCP/IP - Transmission Control Protocol/Internet Protocol	GSCR - Generic Switching Center Requirements	TPC - Twisted Pair Copper	GSTP - Generic Switch Test Plan	U - ISDN BRI Two-Wire Interface	HDB3 - High Density Bipolar Three	VTC - Video Teleconferencing	IEEE - Institute of Electrical and Electronics Engineers, Inc.	Y2K - Year 2000
10BaseT - Ethernet Based Operation, Twisted Pair	ISDN - Integrated Services Digital Network																																								
AMI - Alternate Mark Inversion	kbps - kilobits per second																																								
ANSI - American National Standards Institute	Mbps - Megabits per second																																								
B8ZS - Bipolar Eight Zero Substitution	MFR1 - Multi-Frequency R1																																								
BRI - Basic Rate Interface	MLPP - Multi-Level Precedence and Preemption																																								
CAS - Channel Associated Signaling	PCM-24 - Pulse Code Modulation 24 Channels																																								
CAT - Category	PCM-30 - Pulse Code Modulation 30 Channels																																								
DP - Dial Pulse	PRI - Primary Rate Interface																																								
DSN - Defense Switched Network	SF - Superframe																																								
DTMF - Dual Tone Multi-Frequency	ST - ISDN BRI Four-Wire Interface																																								
E1 - European Basic Rate (2.048 Mbps)	STE - Secure Terminal Equipment																																								
E&M - Ear and Mouth	STU-III - Secure Telephone Unit III																																								
EKTS - Electronic Key Telephone Service	SUT - System Under Test																																								
ESF - Extended Superframe	T1 - Digital Transmission Link level 1 (1.544 Mbps)																																								
FAX - Facsimile	TCP/IP - Transmission Control Protocol/Internet Protocol																																								
GSCR - Generic Switching Center Requirements	TPC - Twisted Pair Copper																																								
GSTP - Generic Switch Test Plan	U - ISDN BRI Two-Wire Interface																																								
HDB3 - High Density Bipolar Three	VTC - Video Teleconferencing																																								
IEEE - Institute of Electrical and Electronics Engineers, Inc.	Y2K - Year 2000																																								

**8. TEST NETWORK DESCRIPTION.** The SUT was tested at JITC's Network Engineering and Integration Laboratory in a manner and configuration similar to that of the DSN operational environment. This test was conducted using the three test configurations shown in figures 2-2, 2-3 and 2-4. Testing of the system's required functions and features was conducted using the test configuration depicted in figure 2-2, and network integration testing was conducted using the test configuration depicted in figure 2-3. These configurations accurately emulate the DSN operational environment. The Advanced Defense Switched Network Integrated Management Support System network management functions and features were tested using the network configuration depicted in figure 2-4.

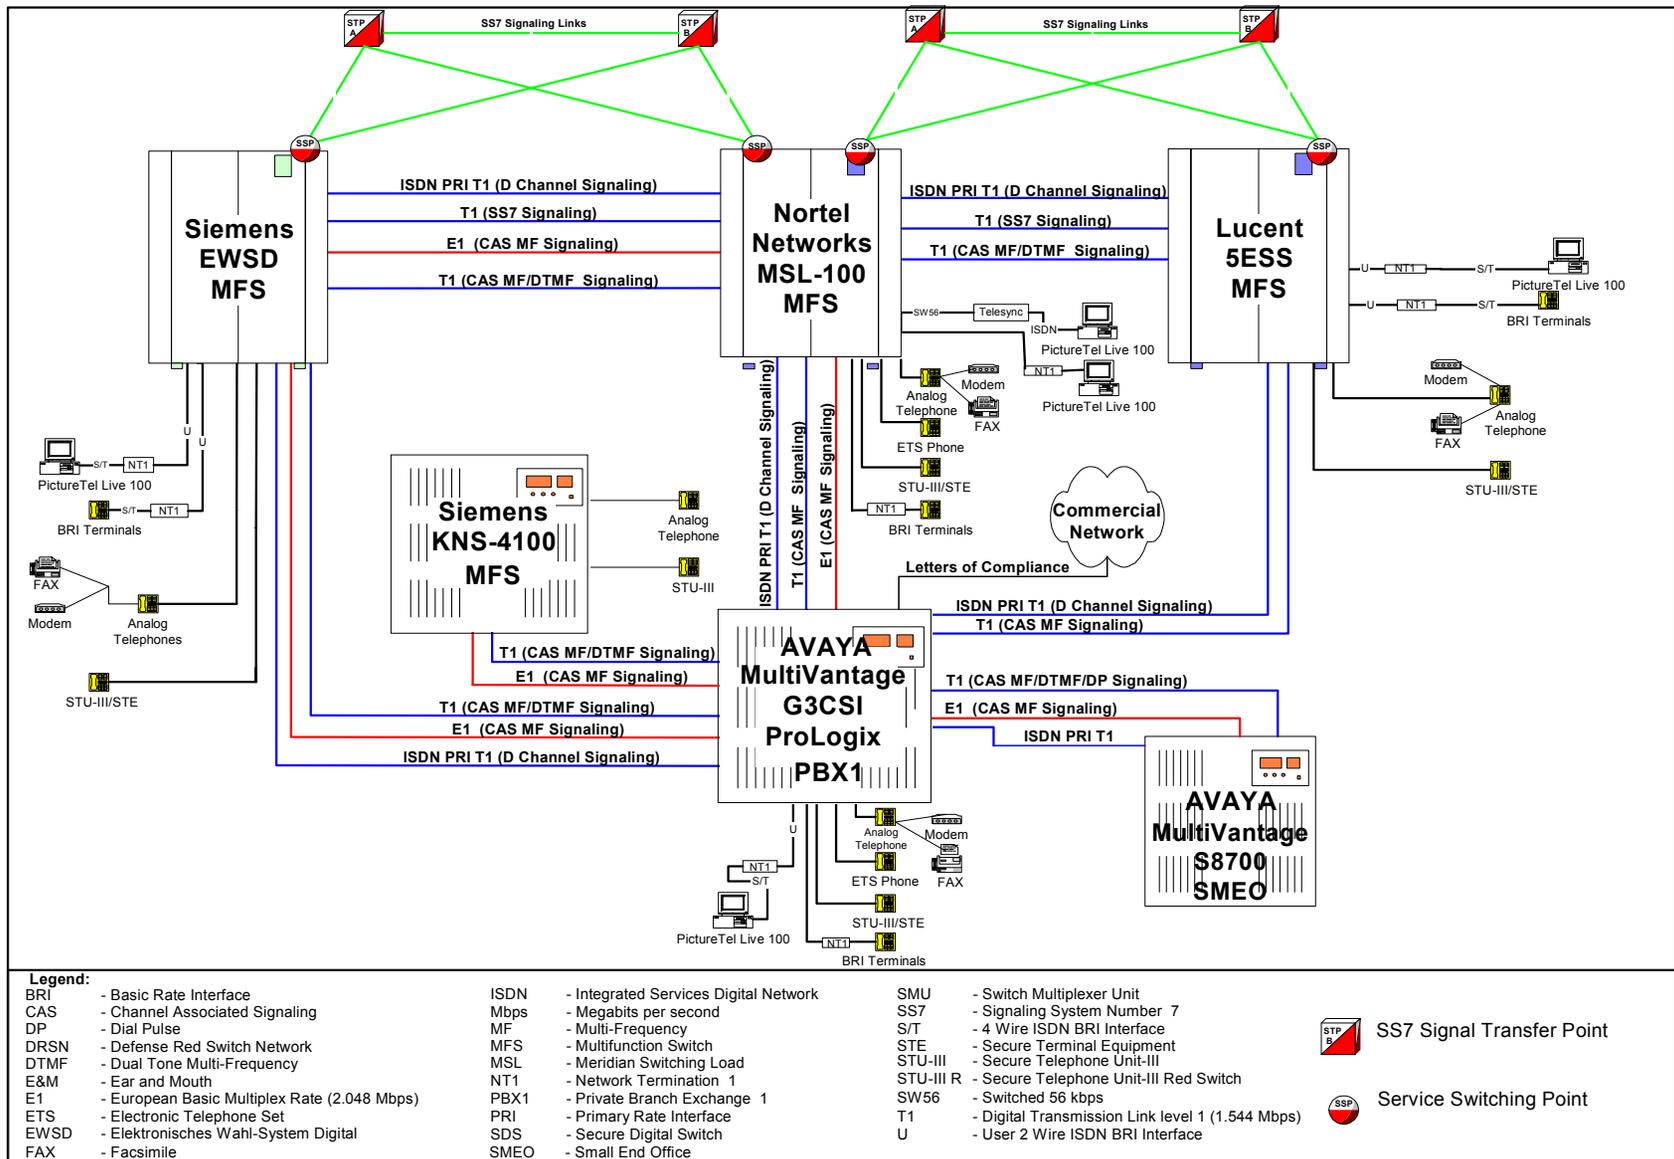


Figure 2-2. Test Configuration


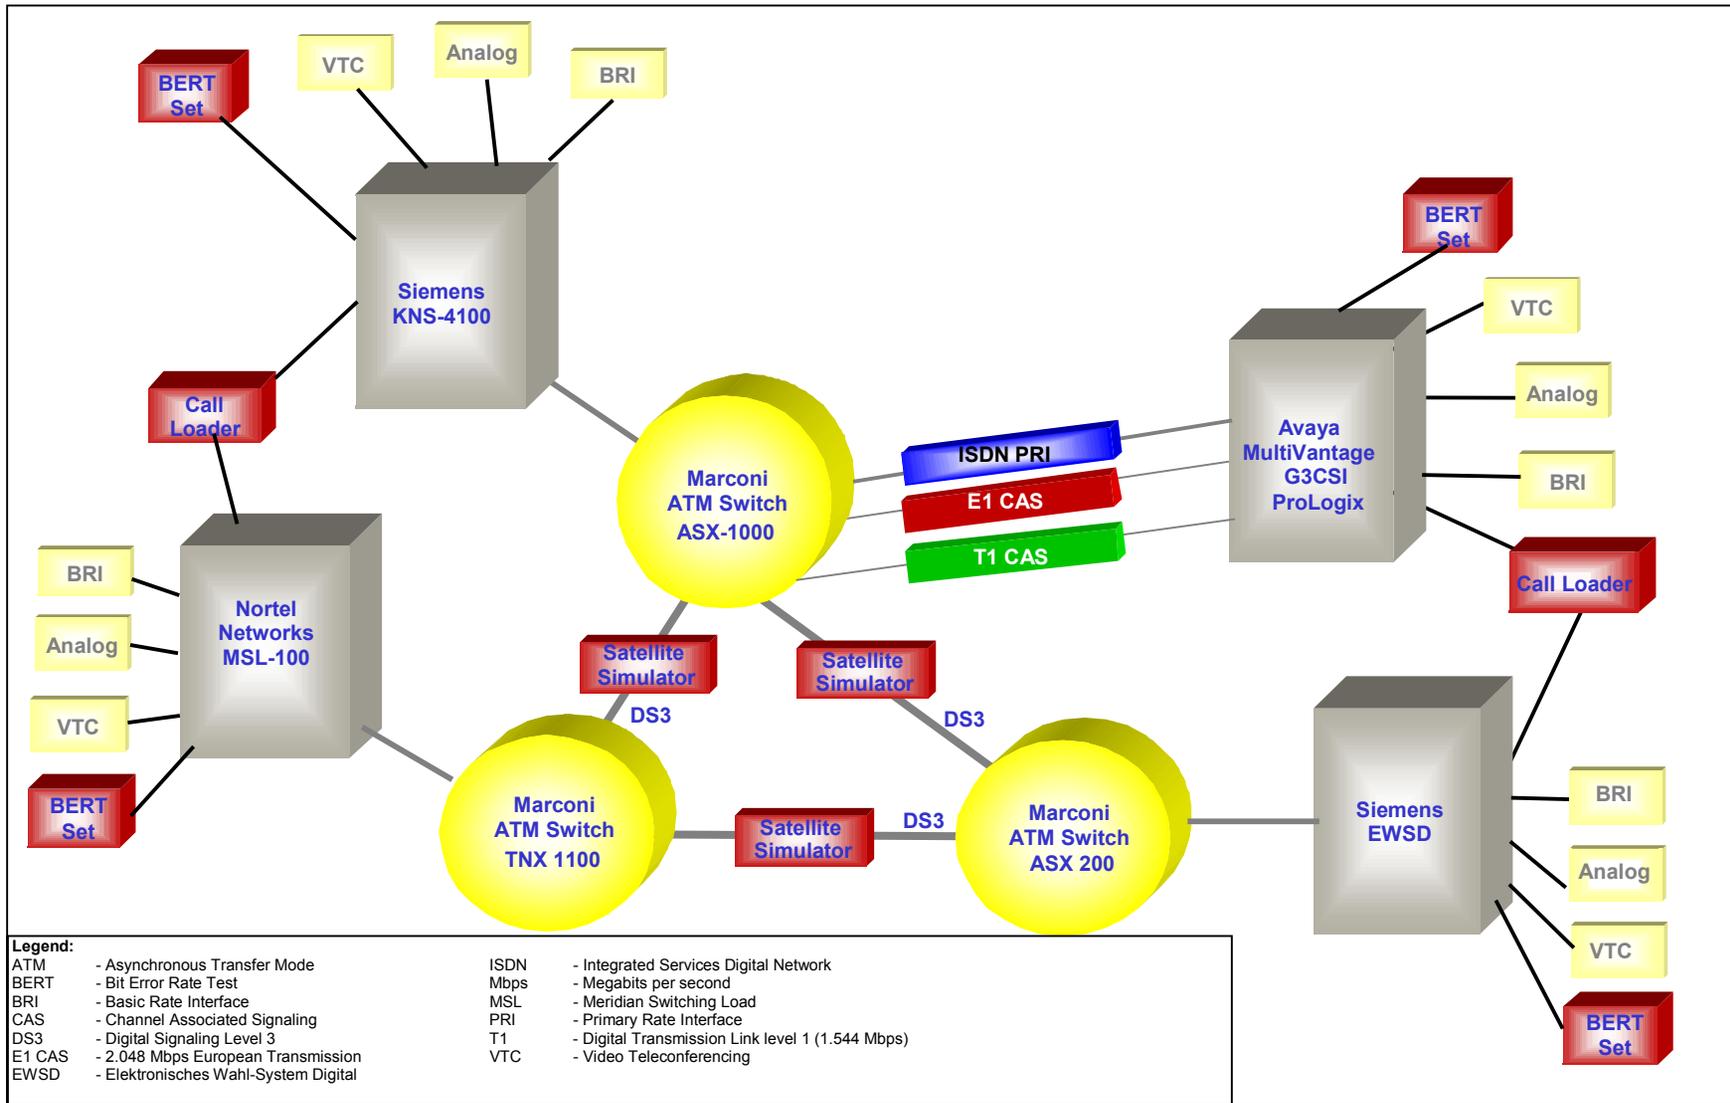


Figure 2-3. Network Integration Test Configuration

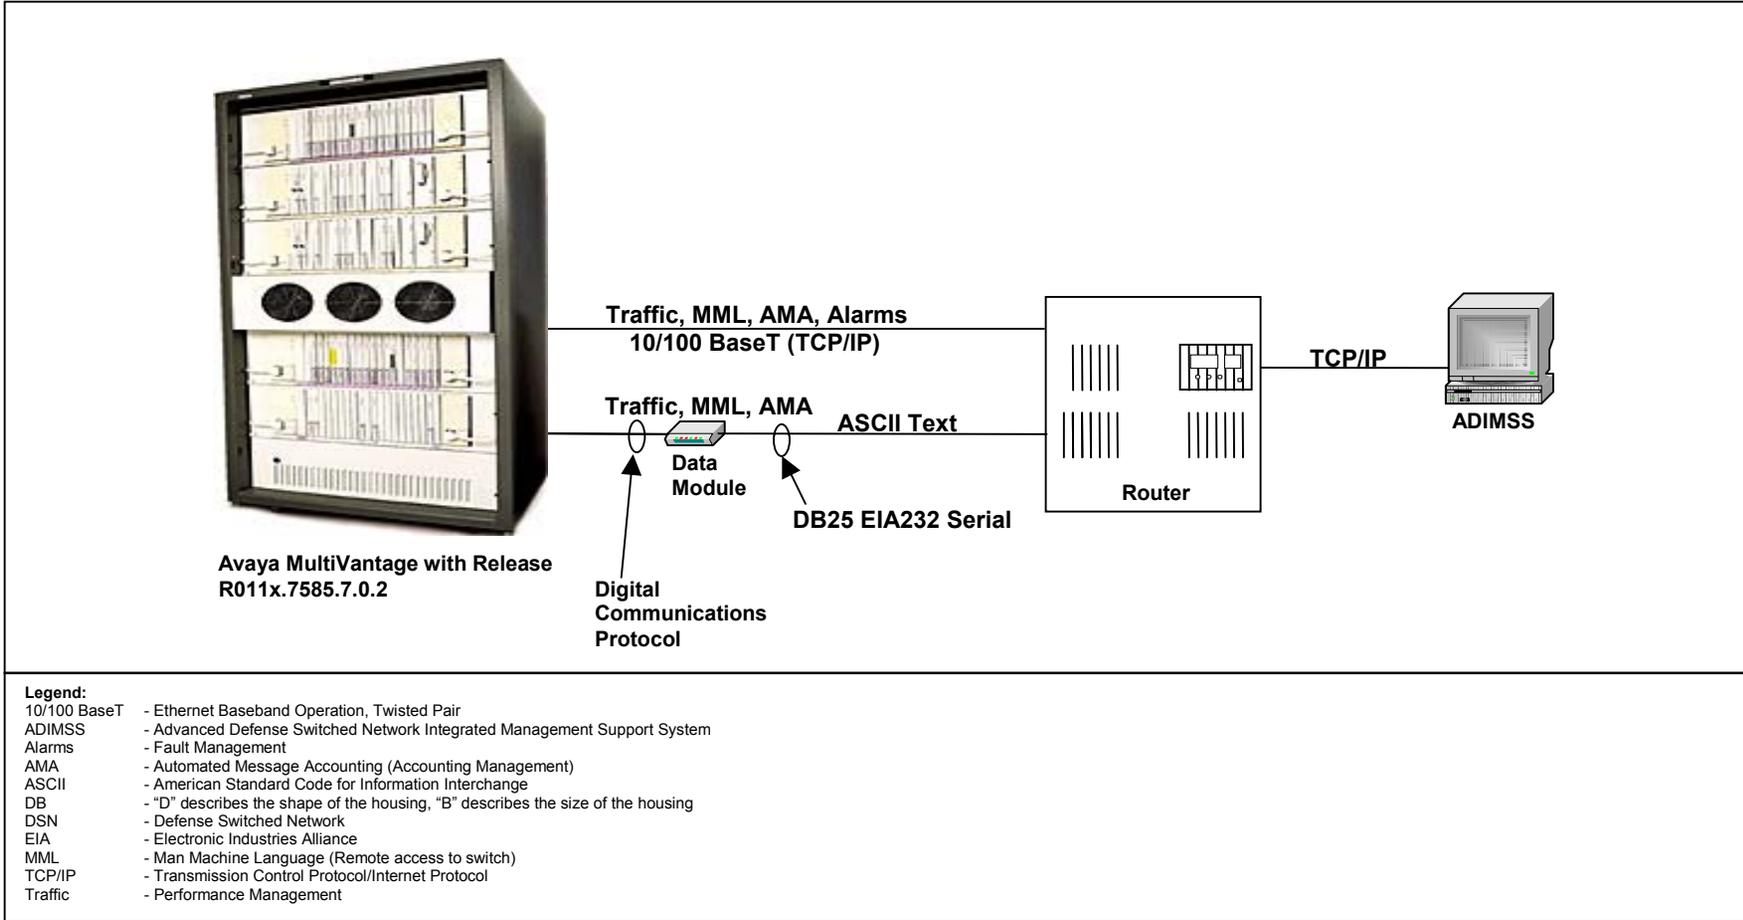

**Figure 2-4. Avaya MultiVantage G3CSI ADIMSS Network Management System Interface**

**9. SYSTEM CONFIGURATIONS.** Table 2-2 provides the system configurations used in the test.

**Table 2-2. Tested System Configurations**

<b>System Name</b>	<b>Software Release</b>
Nortel Networks MSL-100	MSL-17
Avaya MultiVantage S8700	R011x.7585.7.0.2
Avaya MultiVantage G3CSI, ProLogix	R011x.7585.7.0.2
Siemens EWSD	19d with Patch Set 32
Siemens KNS-4100	APS4V2.3
Lucent 5ESS	5E15
SMU 96 Tactical Gateway	RD302185
Tekelec STP	23.1
Nortel Networks Broad Band STP	3.0.3.18d
DSS Red Switch	8.03
MARCONI ATM switches	Versions 6.2 and 7.1
<b>Legend:</b>	
ATM - Asynchronous Transfer Mode	
DSS - Digital Small Switch	
EWSD - Elektronisches Wahl-System Digital	
MSL - Meridian Switching Load	
SMU - Switch Multiplexer Unit	
STP - Signal Transfer Point	

**10. TESTING LIMITATIONS.** None

**11. TEST RESULTS.** Tables 2-3 through 2-6 synopsise the SUT interface ER and FR status and criticality. The test discrepancies identified in tables 2-3 through 2-6 denote only those test discrepancies that remained open after software patches were applied and regression testing was completed. A detailed description of these discrepancies can be found in paragraph 11a.

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
PCM-24 T1 CAS (B8ZS/ESF) (AMI/SF) DTMF	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met
		CDC	No	II-24.2	See Note	No	Met <sup>2</sup>

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
PCM-24 T1 CAS (B8ZS/ESF) (AMI/SF) MFR1	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met
		CDC	No	II-24.2	See note 2	No	Met <sup>2</sup>

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
PCM-24 T1 CAS (B8ZS/ESF) (AMI/SF) DP	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met
		CDC	No	II-24.2	See Note	No	Met <sup>2</sup>

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
PCM-30 E1 CAS HDB3 MFR1	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met
		CDC	No	II-24.2	See Note	No	Met <sup>2</sup>

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
PCM-24 T1 CCS (B8ZS/ESF) ISDN	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		ISDN	No	II-6.2	6.6, 21.1, 21.2, 21.3	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met
		ANSI T1.619a	Yes	II-6.2	21.3.1	Yes	Met <sup>3</sup>

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
Analog E&M Signaling Type I	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4.3 through 4.9	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		System Interface (Alarms, non-secure voice and data, secure voice and data, FAX, VTC)	No	II-4.2	10.1 through 10.12	Yes	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>1</sup>
		System Administration, Measurements, and Service Standards	No	II-8.2	9.1 through 9.5	Yes	Met
		Y2K (Rollover, Valid, Invalid) Dates	No	II-9.2, II-10.2, II-11.2	9.1	Yes	Met
		Screening, Zone Restriction, and DSN Access Restriction	No	II-12.2	5.3.4	Yes	Met
		AMA	No	II-14.2	8.1	No	Met
		Network Integration	No	II-20.2	10	No	Met

**Table 2-3. Defense Switched Network Trunk Interface and Exchange Requirements (continued)**

<b>Legend:</b>		
AMA - Automated Message Accounting	E1 - European Basic Multiplex Rate (2.048 Mbps)	Mbps - Megabits per second
AMI - Alternate Mark Inversion	E&M - Ear and Mouth	MFR1 - Multi-Frequency R1
ANSI - American National Standards Institute	ER - Exchange Requirements	MLPP - Multi-Level Precedence and Preemption
B8ZS - Bipolar Eight Zero Substitution	ESF - Extended Superframe	PCM - Pulse Code Modulation
CAS - Channel Associated Signaling	FAX - Facsimile	SF - Superframe
CDC - Common Data Channel	FR - Functional Requirements	SUT - System Under Test
DISN - Defense Information Systems Network	GSCR - Generic Switching Center Requirements	T1 - Digital Transmission Link level 1 (1.544 Mbps)
DP - Dial Pulse	GSTP - Generic Switch Test Plan	VTC - Video Teleconferencing
DSN - Defense Switched Network	HDB3 - High Density Bi-Polar Three	Y2K - Year 2000
DTMF - Dual Tone Multiple-Frequency	ISDN - Integrated Services Digital Network	
<b>Notes:</b>		
1 SUT meets all the GSCR exchange requirements for attendant services with the following console: Lucent Attendant Console Model 302C.		
2 CDC is a requirement only for DISN-Europe. Switches that have a requirement to interface to the DSN European KNS-4100 switches must be capable of passing CDC traffic transparently.		
3 The Avaya MultiVantage G3CSI will not allow calls between unlike DSN service domains when resources are available. The Avaya MultiVantage G3CSI meets the minimum requirements defined in reference (g). The operational impact is minor.		

**Table 2-4. Defense Switched Network Line Interface and Exchange Requirements**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
TPC, ISDN BRI ST and U, Q.931	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		ANSI T1.619a	Yes	II-6.2	21.3.1	Yes	Met <sup>1</sup>
		ISDN Supplemental Services	Yes	II-6.2	21.3	No	Not Met <sup>2</sup>
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>3</sup>
		Call Treatments	No	II-15.2	5.2.1.1, 5.2.2.1	Yes	Met
		DSN Announcements	Yes	II-19.2	5.6	Yes	Met <sup>4</sup>
		Electronic Key Telephone Service	Yes	II-25.5	21.2	No	Met
2 Wire Analog, TPC	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>3</sup>
		Call Treatments	No	II-15.2	5.2.1.1, 5.2.2.1	Yes	Met
		DSN Announcements	Yes	II-19.2	5.6	Yes	Met <sup>4</sup>

**Table 2-4. Defense Switched Network Line Interface and Exchange Requirements (continued)**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
2 Wire Proprietary Digital	Certified	MLPP	No	II-2.2	2.2.1, 5.3.4	Yes	Met
		Hotline Services	No	II-3.2	21.3.10	No	Met
		Attendant Services	No	II-7.2	2.1.3	No	Met <sup>3</sup>
		Call Treatments	No	II-15.2	5.2.1.1, 5.2.2.1	Yes	Met
		DSN Announcements	Yes	II-19.2	5.6	Yes	Met <sup>4</sup>

**Legend:**

- ANSI - American National Standards Institute
- BRI - Basic Rate Interface
- DSN - Defense Switched Network
- DISN - Defense Information Systems Network
- ER - Exchange Requirements
- FR - Functional Requirements
- GSCR - Generic Switching Center Requirements
- GSTP - Generic Switch Test Plan
- ISDN - Integrated Services Digital Network
- MLPP - Multi-Level Precedence and Preemption
- ST - 4 Wire Integrated Services Digital Network Basic Rate Interface
- SUT - System Under Test
- TPC - Twisted Pair Copper
- U - 2 Wire Integrated Services Digital Network Basic Rate Interface

**Notes:**

- 1 The Avaya MultiVantage G3CSI will not allow calls between unlike DSN service domains when resources are available. The Avaya MultiVantage G3CSI meets the minimum requirements defined in reference (g). The operational impact is minor.
- 2 ISDN Supplemental Services currently not used in the DISN. The operational impact is none.
- 3 SUT meets all the GSCR exchange requirements for attendant services with the following console: Lucent Attendant Console Model 302C.
- 4 Met all DSN Announcement requirements except for Isolation Code Announcement. The Avaya MultiVantage G3CSI provides this announcement only for precedence calls above ROUTINE. ROUTINE precedence calls receive a fast busy signal. The operational impact is minor.

**Table 2-5. Defense Switched Network, Network Management Interface and Exchange Requirements**

Interface & Signaling	Interface Status	Exchange and Functional Requirements	Test Discrepancies	GSTP Para (s)	GSCR Para (s)	Critical Yes/No	ER/FR Status
CAT 5 TPC, IEEE 802.3 10BaseT Ethernet, TCP/IP	Certified	Alarms	No	II-23.2	2.1.10, 16.1	No	Met
		AMA	No	II-23.2	2.1.10, 16.1	No	Met
		Traffic Measurements	No	II-23.2	2.1.10, 16.1	No	Met
		MML	No	II-23.2	2.1.10, 16.1	No	Met
TPC EIA232 Asynchronous @ 9.6 Kpbs	Certified	AMA	No	II-23.2	2.1.10, 16.1	No	Met
		Traffic Measurements	No	II-23.2	2.1.10, 16.1	No	Met
		MML	No	II-23.2	2.1.10, 16.1	No	Met
<b>Legend:</b> 10BaseT - 10 megabits per second Ethernet twisted pair AMA - Automated Message Accounting CAT - Category 5 cable (rated @ 100 megahertz of bandwidth) EIA - Electronic Industries Alliance ER - Exchange Requirements FR - Functional Requirements GSCR - Generic Switching Center Requirements GSTP - Generic Switch Test Plan IEEE - Institute of Electrical and Electronic Engineers Inc. kbps - kilobits per second MML - Man Machine Language TPC - Twisted Pair Copper TCP/IP - Transmission Control Protocol/Internet Protocol							

**Table 2-6. Commercial Network Gateway Interface and Exchange Requirements**

<b>Interface &amp; Signaling</b>	<b>Interface Status</b>	<b>Exchange and Functional Requirements</b>	<b>Test Discrepancies</b>	<b>GSTP Para (s)</b>	<b>GSCR Para (s)</b>	<b>Critical Yes/No</b>	<b>ER/FR Status</b>
Same Interfaces and Signaling as DSN	Certified	See Note	No	See Note	See Note	No	Met
<b>Legend:</b> DSN - Defense Switched Network ER - Exchange Requirements FR - Functional Requirements GSCR - Generic Switching Center Requirements GSTP - Generic Switch Test Plan <b>Note:</b> The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP and specified in tables 2-1 through 2-15 of the GSCR.							

## a. Discussion

(1) **DSN.** All critical interface ERs and FRs for DSN were met. The following minor exceptions are noted:

(a) The SUT will not allow calls between unlike DSN service domains when resources are available. The SUT met the minimum requirements defined in reference (g). The operational impact is minor.

(b) The SUT does not support the following unique Integrated Services Digital Network (ISDN) Basic Rate Interface (BRI) Supplemental Services as specified in the respective GSCR paragraphs listed below. There are currently no switches in the DISN that support ISDN BRI Supplemental Services. The operational impact is none.

- Conference Calling. GSCR Para. 21.3.2
- User-to-User Signaling. GSCR Para. 21.3.3
- Call Hold. GSCR Para. 21.3.4
- Call Waiting. GSCR Para. 21.3.5
- Normal Call Transfer. GSCR Para. 21.3.6
- Explicit Call Transfer. GSCR Para. 21.3.7
- ISDN Call Deflection. GSCR Para. 21.3.8
- Preset Conference Calling. GSCR Para. 21.3.11

(c) The SUT does not support the Isolation Code Announcement (ICA) for ROUTINE precedence calls. ROUTINE precedence calls receive a fast busy tone rather than the required ICA. The ICA is received by calls above ROUTINE precedence. The operational impact is assessed to be minor.

(2) **Commercial Gateway.** The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP, specified in tables 2-1 through 2-15 of the GSCR, with minor exceptions. Exceptions were reviewed and assessed by DISA NS 53, the Development and Operational Engineering Department, and were determined to have a minor operational impact.

**b. Test Summary.** The Avaya MultiVantage G3CSI (ProLogix) Digital Switching System with software release R011x.7585.7.0.2 is certified for joint use in the DISN as a PBX1 in accordance with the requirements set forth in the GSCR and the DISA NS53 Memorandum, "DSN Global Network Requirements for Small End Office and Private Branch Exchange Category of Switches" dated 18 March 2003. Minor discrepancies identified during testing will have no adverse operational impact. The interoperability summary and status to include criticality for each interface is shown in tables 2-7 and 2-8.

**12. TEST AND ANALYSIS REPORT.** No detailed test report was developed per the Program Manager's request. JITC distributes interoperability information via the JITC Electronic Report Distribution (ERD) system -- ERD uses unclassified (NIPRNET) e-mail. More comprehensive interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/gov users on the NIPRNET at <https://stp.fhu.disa.mil/>. Test reports, lessons learned, and related testing documents and references are on the JITC Joint Interoperability Tool (JIT) at <http://jit.fhu.disa.mil> (NIPRNET), or <http://199.208.204.125/> (SIPRNET). Information related to DSN testing is on the Telecom Switched Services Interoperability (TSSI) website at <http://jitc.fhu.disa.mil/tssi>.

**Table 2-7. Avaya MultiVantage G3CSI Digital Switching Systems Interoperability Summary**

Network	Status	Remarks
DSN	Certified	- VoIP not certified - Certified as PBX1 and PBX2 - RSU not certified - E1 CAS and CDC certified (DISN-E only) - The identified test discrepancies shown in enclosure 2 that remained open have an overall minor operational impact.
Commercial Gateway	Certified	
<b>Legend:</b> CAS - Channel Associated Signaling CDC - Common Data Channel DISN-E - Defense Information System Network Europe DSN - Defense Switched Network E1 - European Basic Rate (2.048 Mbps) Mbps - Megabits per second MFS - Multi-Function Switch PBX1 - Private Branch Exchange 1 PBX2 - Private Branch Exchange 2 RSU - Remote Switching Unit T1 - Digital Transmission Link level 1 (1.544 Mbps) VoIP - Voice over Internet Protocol		

**Table 2-8. Interoperability Status**

	Trunk Interfaces			
	Interface & Signaling	Critical	Status	Remarks
Defense Switched Network	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DTMF	No	Certified	Met all ERs and FRs.
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS MFR1	No	Certified	Met all ERs and FRs.
	PCM-24 T1 (B8ZS/ESF) (AMI/SF) CAS DP	No	Certified	Met all ERs and FRs.
	PCM-30 E1 CAS HDB3 MFR1	No	Certified	Met all ERs and FRs
	PCM-24 T1 (B8ZS/ESF) ISDN PRI	Yes	Certified	Met all critical ERs and FRs. Full compliance to the ANSI T1.619a requirement not met. <sup>1</sup> Operational impact is minor.
	Analog E&M Signaling Type I	No	Certified	Met all ERs and FRs.
	Line Interfaces			
	Interface & Signaling	Critical	Status	Remarks
	TPC ISDN BRI ST and U Interface Q.931	Yes	Certified	Met all critical ERs and FRs. ISDN Supplemental Services <sup>2</sup> and full compliance of DSN Announcements <sup>3</sup> not met. Operational impact is minor.
	TPC 2-Wire analog	Yes	Certified	Met all critical ERs and FRs. Full compliance of DSN Announcements <sup>3</sup> not met. Operational impact is minor.
	TPC 2-Wire Digital (Proprietary)	No	Certified	Met all ERs and FRs except for full compliance of DSN Announcements <sup>3</sup> . Operational impact is minor.
	Network Management Interfaces			
	Interface & Signaling	Critical	Status	Remarks
	CAT 5 TPC IEEE 802.3 10BaseT Ethernet, TCP/IP	Yes	Certified	Met all ERs and FRs.
TPC EIA232 Asynchronous @ 9.6 kbps	Yes	Certified	Met all ERs and FRs.	

**Table 2-8. Interoperability Status (continued)**

Commercial Network Gateway	Trunk Interfaces			
	Interface & Signaling	Critical	Status	Remarks
	Same Interfaces and Signaling as DSN	Yes	Certified	See note 4.
<b>Legend:</b> 10BaseT - Ethernet Based Operation, Twisted Pair AMI - Alternate Mark Inversion ANSI - American National Standards Institute B8ZS - Bipolar Eight Zero Substitution BRI - Basic Rate Interface CAS - Channel Associated Signaling CAT - Category DP - Dial Pulse DISN - Defense Information Systems Network DSN - Defense Switched Network DTMF - Dual Tone Multi-Frequency E1 - European Basic Multiplex Rate (2.048 Mbps) E&M - Ear and Mouth ERs - Exchange Requirements ESF - Extended Superframe FRs - Functional Requirements GSCR - Generic Switching Center Requirements GSTP - Generic Switch Test Plan HDB3 - High Density Bi-polar Three IEEE - Institute of Electrical and Electronic Engineers Inc. ISDN - Integrated Services Digital Network kbps - kilobits per second Mbps - Megabits per second MFR1 - Multi-Frequency R1 PCM-24 - Pulse Code Modulation 24 Channels PCM-30 - Pulse Code Modulation 30 Channels PRI - Primary Rate Interface RS - Recommended Standard SF - Superframe ST - ISDN BRI Four-Wire Interface T1 - Digital Transmission Link level 1 (1.544 Mbps) TPC - Twisted Pair Copper TCP/IP - Transmission Control Protocol/Internet Protocol U - ISDN BRI Two-Wire Interface				
<b>Notes:</b> 1 The Avaya MultiVantage G3CSI will not allow calls between unlike DSN service domains when resources are available. The Avaya G3CSI meets the minimum requirements for ANSI T1. 619a in reference (g). The operational impact is minor. 2 ISDN Supplemental Services currently not used in the DISN. The operational impact is none. 3 Met all DSN Announcement requirements except for Isolation Code Announcement. The Avaya MultiVantage G3CSI provides this announcement only for precedence calls above ROUTINE. ROUTINE precedence calls receive a fast busy signal. 4 The certification/compliance of interoperability to commercial networks was satisfied based on the review of the vendor's letter of compliance to requirements identified as the "L" and "V" items listed in appendix E of the GSTP and specified in tables 2-1 through 2-15 of the GSCR.				