



## DEFENSE INFORMATION SYSTEMS AGENCY

P. O. BOX 4502  
ARLINGTON, VIRGINIA 22204-4502

IN REPLY  
REFER TO: Joint Interoperability Test Command (JTE)

**6 Mar 09**

### MEMORANDUM FOR DISTRIBUTION

**SUBJECT:** Special Interoperability Test Certification of the Xerox WorkCentre 4260 Family of Xerox Phaser and WorkCentre Office Multi-Functional Devices and Printers Running the Xerox Internet Protocol (IP) Core Software Version 6.6.3.P Software Platform for IP Version 6 Capability

**References:** (a) DoDD 4630.5, "Interoperability and Supportability of Information Technology (IT) and National Security Systems (NSS)," 5 May 2004  
(b) CJCSI 6212.01E, "Interoperability and Supportability of Information Technology and National Security Systems," 15 December 2008  
(c) through (h), see Enclosure 1

1. References (a) and (b) establish the Joint Interoperability Test Command (JITC), as the responsible organization for interoperability test certification.
2. The Xerox WorkCentre 4260 office multi-functional device (MFD) and printer running the Xerox Internet Protocol (IP) Core Software Version 6.6.3.P (XPICsv6.6.3.P) software platform met the IP Version 6 (IPv6) Capable interoperability requirements of a Simple Server as described in the Department of Defense (DoD) Information Technology Standards Registry, "DoD IPv6 Standard Profiles for IPv6 Capable Products Version 3.0," July 2008, reference (c). The Xerox WorkCentre 4260 running the XPICsv6.6.3.P software platform has successfully completed the related IPv6 Interoperability portions of the "DoD IPv6 Generic Test Plan (GTP) Version 3," August 2007, reference (d), and is certified for listing on the Unified Capabilities (UC) Approved Products List (APL) as IPv6 Capable. The Xerox WorkCentre 4260 running the XPICsv6.6.3.P software platform is part of a family of Xerox Phaser and WorkCentre MFDs and printers running the XPICsv6.6.3.P software platform, including the WorkCentre 4250, WorkCentre 3730, WorkCentre 3740, WorkCentre 3210, WorkCentre 3220, Phaser 3635MFP, Phaser 3300MFP, and Phaser 3600 devices that were not tested. JITC analysis determined that the members of this Xerox Phaser and WorkCentre family of MFDs and printers running the XPICsv6.6.3.P software platform are functionally identical for certification purposes. Therefore, the WorkCentre 4250, WorkCentre 3730, WorkCentre 3740, WorkCentre 3210, WorkCentre 3220, Phaser 3635MFP, Phaser 3300MFP, and Phaser 3600 devices running the XPICsv6.6.3.P software platform are also certified as IPv6 capable. This certification expires upon changes that could affect interoperability, but no later than 4 years from the date of this memorandum.

JITC Memo, JTE, Special Interoperability Test Certification of the Xerox WorkCentre 4260 Family of Xerox Phaser and WorkCentre Office Multi-Functional Devices and Printers Running the Xerox Internet Protocol (IP) Core Software Version 6.6.3.P Software Platform for IP Version 6 Capability

3. This special certification is based on IPv6 Capable Interoperability testing conducted by JITC at Fort Huachuca, Arizona, and the vendor’s Letter of Compliance (LoC) dated 2 December 2008. Interoperability testing was conducted from 16 through 18 February 2009, at JITC’s Advanced IP Technology Capability. Conformance testing was confirmed by Xerox, and was verified in the LoC provided. Enclosure 2 documents the summary test results and describes the devices. Users should verify interoperability before deploying the devices in an environment that varies significantly from that described.

4. The device’s interoperability status summary is in Table 1, and Table 2 contains the equipment listing.

**Table 1. Interoperability Status Summary**

<b>Xerox WorkCentre 4260</b>		
<b>Functional Category</b>	<b>Requirement</b>	<b>Verified</b>
IPv6 Base	M	Yes
IPSec	S+	No
Transition Mechanisms	S	Yes
Quality of Service	O	No
Mobility	CS	No
RoHC	O	No
Automatic Configuration	M	Yes
Server	O	No
Host	S	Yes
<b>LEGEND:</b>		
CS	Conditional Should	O Optional
IPSec	Internet Protocol Security	RoHC Robust Header Compression
IPv6	Internet Protocol Version 6	S Should
M	Must	S+ Should+
<b>NOTE:</b> The terms Must, Conditional Should, Should, Should Plus, and Optional are used to reference specific required Request for Comments from the Internet Engineering Task Force, the Department of Defense Information Technology Standards Registry, and the Department of Defense Internet Protocol Version 6 Generic Test Plan.		

**Table 2. Equipment Listing**

<b>Xerox WorkCentre 4260</b>		
<b>Component</b>	<b>Firmware/Software</b>	<b>Interface</b>
Xerox WorkCentre 4260	XIPCSv6.6.3.P	RJ45 Gigabit Ethernet
<b>LEGEND:</b>		
RJ	Registered Jack	XIPCSv Xerox Internet Protocol Core Software version

JITC Memo, JTE, Special Interoperability Test Certification of the Xerox WorkCentre 4260 Family of Xerox Phaser and WorkCentre Office Multi-Functional Devices and Printers Running the Xerox Internet Protocol (IP) Core Software Version 6.6.3.P Software Platform for IP Version 6 Capability

5. JITC distributes interoperability information via the JITC Electronic Report Distribution (ERD) system, which uses Unclassified-But-Sensitive Internet Protocol Router Network (NIPRNet) e-mail. More comprehensive interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/gov users on the NIPRNet at <https://stp.fhu.disa.mil>. Test reports, lessons learned, and related testing documents and references are on the JITC Joint Interoperability Tool (JIT) at <http://jit.fhu.disa.mil> (NIPRNet), or <http://199.208.204.125> (SIPRNet). Information related to IPv6 Capable testing is on the UC APL at [http://jitc.fhu.disa.mil/adv\\_ip/register/register.html](http://jitc.fhu.disa.mil/adv_ip/register/register.html).

6. The JITC point of contact is Donald L. Hann, DSN 879-5130, commercial (520) 538-5130, or e-mail: [don.hann@disa.mil](mailto:don.hann@disa.mil).

FOR THE COMMANDER:



2 Enclosures a/s

for RICHARD A. MEADOR  
Chief  
Battlespace Communications Portfolio

Distribution (electronic mail):

Joint Staff J-6

Joint Interoperability Test Command, Liaison, TE3/JT1

Office of Chief of Naval Operations, CNO N6F2

Headquarters U.S. Air Force, Office of Warfighting Integration & CIO, AF/XCIN (A6N)

Department of the Army, Office of the Secretary of the Army, DA-OSA CIO/G-6 ASA (ALT), SAIS-IOQ

U.S. Marine Corps MARCORSSYSCOM, SIAT, MJI Division I

DOT&E, Net-Centric Systems and Naval Warfare

U.S. Coast Guard, CG-64

Defense Intelligence Agency

National Security Agency, DT

Defense Information Systems Agency, TEMC

Office of Assistant Secretary of Defense (NII)/DOD CIO

U.S. Joint Forces Command, Net-Centric Integration, Communication, and Capabilities Division, J68

DITO, Defense Information Systems Agency (DISA), Attn: GE36, P.O. Box 4502, Arlington, VA 22204-4502

Xerox Corporation, Attn: John Kaye, 26600 SW. Parkway Ave., Wilsonville, OR 97070

## **ADDITIONAL REFERENCES**

- (c) Department of Defense (DoD) Information Technology Standards Registry (DISR), "DoD IPv6 Standard Profiles for IPv6 Capable Products Version 3.0," July 2008
- (d) Joint Interoperability Test Command, "DoD IPv6 Generic Test Plan Version 3," August 2007
- (e) DoD Chief Information Officer (CIO) Memorandum, "IPv6," 9 June 2003
- (f) DoD CIO Memorandum, "IPv6 Interim Transition Guidance," 29 September 2003
- (g) DoD IPv6 Transition Office, "DoD IPv6 Master Test Plan, Version 2," September 2006
- (h) DoD, "DISR Global Information Grid (GIG) Convergence Master Plan (GCMP), Version 5.25," 29 March 2006

## INTERNET PROTOCOL VERSION 6 CAPABLE TESTING SUMMARY

- 1. SYSTEM TITLE.** The Xerox WorkCentre 4260 using the Xerox Internet Protocol (IP) Core Software Version 6.6.3.P software platform, hereafter referred to as the device under test (DUT).
- 2. PROPONENT.** Department of Defense (DoD) IP Version 6 (IPv6) Transition Office (DITO).
- 3. PROGRAM MANAGER/USER POC.** DITO, Defense Information Systems Agency (DISA), Attn: GE36 Sam Assi, P.O. Box 4502, Arlington, VA 22204-4502, (703) 882-0241, e-mail: sam.assi@disa.mil.
- 4. TESTER.** Donald L. Hann, Joint Interoperability Test Command (JITC), P.O. Box 12798, Fort Huachuca, AZ 85670-2798, DSN: 879-5130, commercial: (520) 538-5130, e-mail: don.hann@disa.mil.
- 5. DEVICE UNDER TEST DESCRIPTION.** The DUT was a network ready office multi-functional device used for black and white printing and copying as well as color scanning.
- 6. OPERATIONAL ARCHITECTURE.** The operational architecture was the JITC simulated Defense Information Systems Network (DISN) IP Core Network as depicted in Figure 2-1.
- 7. REQUIRED DEVICE INTERFACES.** All IPv6-capable products to be included on the Unified Capabilities Approved Product List must meet the requirements of the DoD Information Technology Standards Registry (DISR), "DoD IPv6 Standard Profiles for IPv6 Capable Products Version 3.0," July 2008. Product testing conducted against these requirements is in accordance with the "DoD IPv6 Generic Test Plan (GTP) Version 3," August 2007. The IPv6 Simple Server profile requirements for conformance and interoperability are in Table 2-1.



**Table 2-1. IPv6 Capability Requirements and Status**

Xerox WorkCentre 4260							
RFC	RFC Title	Testing Completed		Simple Server		Implemented	Comments
		Conformance	Interoperability	Requirement	Met/Not Met		
<b>IPv6 Base</b>							
2460	Internet Protocol version 6 (IPv6) Specification	Stated in LoC	Yes	M	Met	Yes	
4443	Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification	Stated in LoC	Yes	M	Met	Yes	
2461	Neighbor Discovery for IP version 6 (IPv6)	Stated in LoC	Yes	M	Met	Yes	
2462	IPv6 Stateless Address Auto configuration	Stated in LoC	Yes	M	Met	Yes	
1981	Path Maximum Transmission Unit Discovery for IPv6	Stated in LoC	Yes	S	Met	Yes	
4291	IPv6 Addressing Architecture	Stated in LoC	Yes	M	Met	Yes	
4007	IPv6 Scoped Address Architecture	Stated in LoC	Yes	M	Met	Yes	
4193	Unique Local IPv6 Unicast Addresses	Stated in LoC	Yes	S	Met	Yes	
2710	Multicast Listener Discovery (MLD)	Stated in LoC	Yes	M	Met	Yes	
3810	Multicast Listener Discovery Version 2 (MLDv2) for IPv6	Stated in LoC	Yes	S+	Met	Yes	
2464	Transmission of IPv6 Packets over Ethernet Networks	Stated in LoC	Yes	CM	Met	Yes	Note 1
<b>IPSec</b>							
4301	Security Architecture for the Internet Protocol	Not Stated	Not Tested	S+	Not Tested	No	
4302	IP Authentication Header	Not Stated	Not Tested	S	Not Tested	No	
4303	IP Encapsulating Security Payload (ESP)	Not Stated	Not Tested	S+	Not Tested	No	
4308	Cryptographic Suites for IPSec	Not Stated	Not Tested	S+	Not Tested	No	
4305	Cryptographic Algorithm Implementation Requirements for Encapsulating Security Payload (ESP) and Authentication Header (AH)	Not Stated	Not Tested	S+	Not Tested	No	
4869	Suite B Cryptographic Suites for IPsec	Not Stated	Not Tested	S+	Not Tested	No	
3971	Secure Neighbor Discovery	Not Stated	Not Tested	S	Not Tested	No	
3972	Cryptographically Generated Addresses	Not Stated	Not Tested	S	Not Tested	No	
3041	Privacy Extensions for Stateless Address Auto configuration in IPv6	Not Stated	Not Tested	S	Not Tested	No	

**Table 2-1. IPv6 Capability Requirements and Status (continued)**

<b>Xerox WorkCentre 4260</b>							
<b>RFC</b>	<b>RFC Title</b>	<b>Testing Completed</b>		<b>Simple Server</b>		<b>Implemented</b>	<b>Comments</b>
		<b>Conformance</b>	<b>Interoperability</b>	<b>Requirement</b>	<b>Met/Not Met</b>		
4306	Internet Key Exchange (IKEv2) Protocol	Not Stated	Not Tested	S+	Not Tested	No	
4307	Cryptographic Algorithms for Internet Key Exchange Version 2 (IKEv2)	Not Stated	Not Tested	S+	Not Tested	No	
<b>Transition Mechanisms</b>							
4213	Transition Mechanisms for IPv6 Host and Routers	Stated in LoC	Yes	S	Met	Yes	
2766	Network Address Translation – Protocol Translation (NAT-PT)	Not Stated	Not Tested	SN	Not Tested	No	
3053	IPv6 Tunnel Broker	Not Stated	Not Tested	CS	Not Tested	No	
<b>QoS</b>							
2474	Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers	Not Stated	Not Tested	O	Not Tested	No	
3168	The Addition of Explicit Congestion Notification (ECN) to IP	Not Stated	Not Tested	O	Not Tested	No	
2205	Resource ReSerVation Protocol (RSVP) – Version 1 Functional Specification	Not Stated	Not Tested	O	Not Tested	No	
2207	RSVP Extensions for IPSEC Data Flows	Not Stated	Not Tested	O	Not Tested	No	
2210	The Use of RSVP with IETF Integrated Services	Not Stated	Not Tested	O	Not Tested	No	
2750	RSVP Extensions for Policy Control	Not Stated	Not Tested	O	Not Tested	No	
3175	Aggregation of RSVP for IPv4 and IPv6 Reservations	Not Stated	Not Tested	O	Not Tested	No	
3181	Signaled Preemption Priority Policy Object	Not Stated	Not Tested	O	Not Tested	No	
2961	RSVP Refresh Overhead Reduction Extension	Not Stated	Not Tested	O	Not Tested	No	
4495	A Resource Reservation Protocol (RSVP) Extension for the Reduction of Bandwidth of a Reservation Flow	Not Stated	Not Tested	O	Not Tested	No	
2998	A Framework for Integrated Services Operation over DiffServ Networks	Not Stated	Not Tested	O	Not Tested	No	
2996	Format of the RSVP DCLASS Object	Not Stated	Not Tested	O	Not Tested	No	
2746	RSVP Operation Over IP Tunnels	Not Stated	Not Tested	O	Not Tested	No	
3182	Identity Representation for RSVP	Not Stated	Not Tested	O	Not Tested	No	
2872	Application and Sub Application Identity Policy Element for Use with RSVP	Not Stated	Not Tested	O	Not Tested	No	
2747	RSVP Cryptographic Authentication	Not Stated	Not Tested	O	Not Tested	No	
<b>Mobility</b>							
3775	Mobility Support in IPv6	Not Stated	Not Tested	CS	Not Tested	No	


**Table 2-1. IPv6 Capability Requirements and Status (continued)**

<b>Xerox WorkCentre 4260</b>							
<b>RFC</b>	<b>RFC Title</b>	<b>Testing Completed</b>		<b>Simple Server</b>		<b>Implemented</b>	<b>Comments</b>
		<b>Conformance</b>	<b>Interoperability</b>	<b>Requirement</b>	<b>Met/Not Met</b>		
3776	Using IPsec to Protect Mobile IPv6 Signaling Between Mobile Nodes and Home Agents	Not Stated	Not Tested	CS	Not Tested	No	
4877	Mobile IPv6 Operation with IKEv2 and the Revised IPsec Architecture	Not Stated	Not Tested	CS	Not Tested	No	
4282	The Network Address Identifier	Not Stated	Not Tested	CS	Not Tested	No	
4283	Mobile Node Identifier for Option for IPv6	Not Stated	Not Tested	CS	Not Tested	No	
<b>RoHC</b>							
3095	Robust Header Compression (RoHC)	Not Stated	Not Tested	O	Not Tested	No	
4815	Corrections and Clarification to RFC 3095	Not Stated	Not Tested	O	Not Tested	No	
4995	RoHC Framework	Not Stated	Not Tested	O	Not Tested	No	
4996	RoHC: A profile for TCP/IP	Not Stated	Not Tested	O	Not Tested	No	
3241	RoHC over PPP	Not Stated	Not Tested	O	Not Tested	No	
3843	RoHC: A Compression Profile for IP	Not Stated	Not Tested	O	Not Tested	No	
4362	RoHC: A Link-Layer Assisted Profile for IP/UDP/RTP	Not Stated	Not Tested	O	Not Tested	No	
2507	IP Header Compression	Not Stated	Not Tested	O	Not Tested	No	
2508	Compressing IP/UDP/RTP Headers for Low-Speed Serial Links	Not Stated	Not Tested	O	Not Tested	No	
3173	IP Payload Compression	Not Stated	Not Tested	O	Not Tested	No	
<b>Automatic Configuration</b>							
2462	IPv6 Stateless Address Auto configuration	Stated in LoC	Yes	M	Met	Yes	
3315	DHCPv6	Not Stated	Not Tested	CM	Not Tested	No	
3769	IPv6 Prefix Delegation	Not Stated	Not Tested	CM	Not Tested	No	
3633	IPv6 Prefix Options for DHCPv6	Not Stated	Not Tested	CM	Not Tested	No	
5175	Extensions to Router Advertisement Flags	Not Stated	Not Tested	CS+	Not Tested	No	
<b>Server</b>							
959	File Transfer Protocol	Not Stated	Not Tested	O	Not Tested	No	
2428	FTP Extensions for IPv6 and NAT	Not Stated	Not Tested	O	Not Tested	No	
2821	Simple Mail Transfer Protocol (SMTP)	Not Stated	Not Tested	O	Not Tested	No	
2911	Internet Printing Protocol	Not Stated	Not Tested	O	Not Tested	No	
3162	RADIUS (Remote Authentication dial-In User Service) and IPv6	Not Stated	Not Tested	O	Not Tested	No	
4330	Simple Network Time Protocol (SNTP)	Not Stated	Not Tested	O	Not Tested	No	
3226	DNS Security and IPv6 A6 Aware Server/Resolver Message Size Requirements	Not Stated	Not Tested	O	Not Tested	No	
3261	Session Initiation Protocol (SIP)	Not Stated	Not Tested	O	Not Tested	No	
3596	DNS Extensions to Support IPv6	Not Stated	Not Tested	O	Not Tested	No	
3053	IPv6 Tunnel Broker	Not Stated	Not Tested	O	Not Tested	No	

**Table 2-1. IPv6 Capability Requirements and Status (continued)**

Xerox WorkCentre 4260							
RFC	RFC Title	Testing Completed		Simple Server		Implemented	Comments
		Conformance	Interoperability	Requirement	Met/Not Met		
<b>Host</b>							
3484	Default Address Selection for IPv6	Stated in LoC	Yes	S	Met	Yes	
3596	DNS Extensions to Support IPv6	Stated in LoC	Yes	S	Met	Yes	
3986	Uniform Resource Identifier (URI): Generic Syntax	Not Stated	Not Tested	S	Not Tested	No	
<b>Other</b>							
2616	Hypertext Transfer Protocol – HTTP/1.1	Stated in LoC	Yes	N/R	Met	Yes	Note 2
<b>LEGEND:</b>							
CBC	Cipher Block Chaining		M	Must			
CCM	CBC MAC Mode		MAC	Message Authentication Code			
CM	Conditional Must		MIB	Management Information Base			
CS	Conditional Should		N/R	No Requirement			
CS+	Conditional Should+		NAT	Network Address Translation			
DHCPv6	Dynamic Host Configuration Protocol Version 6		O	Optional (May)			
DISR	DoD Information Technology Standards Registry		OSPF	Open Shortest Path First			
DNS	Domain Name Service		PPP	Point-to-Point Protocol			
DoD	Department of Defense		QoS	Quality of Service			
FTP	File Transfer Protocol		RFC	Request for Comment			
HMC	Hardware Management Console		RoHC	Robust Header Compression			
IETF	Internet Engineering Task Force		RSVP	Resource ReSerVation Protocol			
IKEv2	Internet Key Exchange Version 2		RTP	Real-Time Transport Protocol			
IP	Internet Protocol		S	Should			
IPSec	Internet Protocol Security		SLAAC	Stateless Address Auto-configuration			
IPv4	Internet Protocol Version 4		SN	Should Not			
IPv6	Internet Protocol Version 6		S+	Should+			
LoC	Letter of Conformance		UDP	User Datagram Protocol			
<b>NOTES:</b>							
1. The device must be conformant to at least one of the Connection Technologies protocols							
2. This RFC is not listed in the DISR Product Profile, but was tested per the vendor's LoC.							
3. The terms Must, Conditional Must, Should, Should+, Conditional Should, Conditional Should +, Should Not, and Optional are used to reference specific required RFCs from the IETF, the DoD Information Technology Standards Registry, and the DoD IPv6 Generic Test Plan.							

**8. TEST NETWORK DESCRIPTION.** The DUT was tested as part of the JITC simulated DISN IP Core Network managed by the Advanced IP Technology Capability, and configured as shown in Figure 2-2.

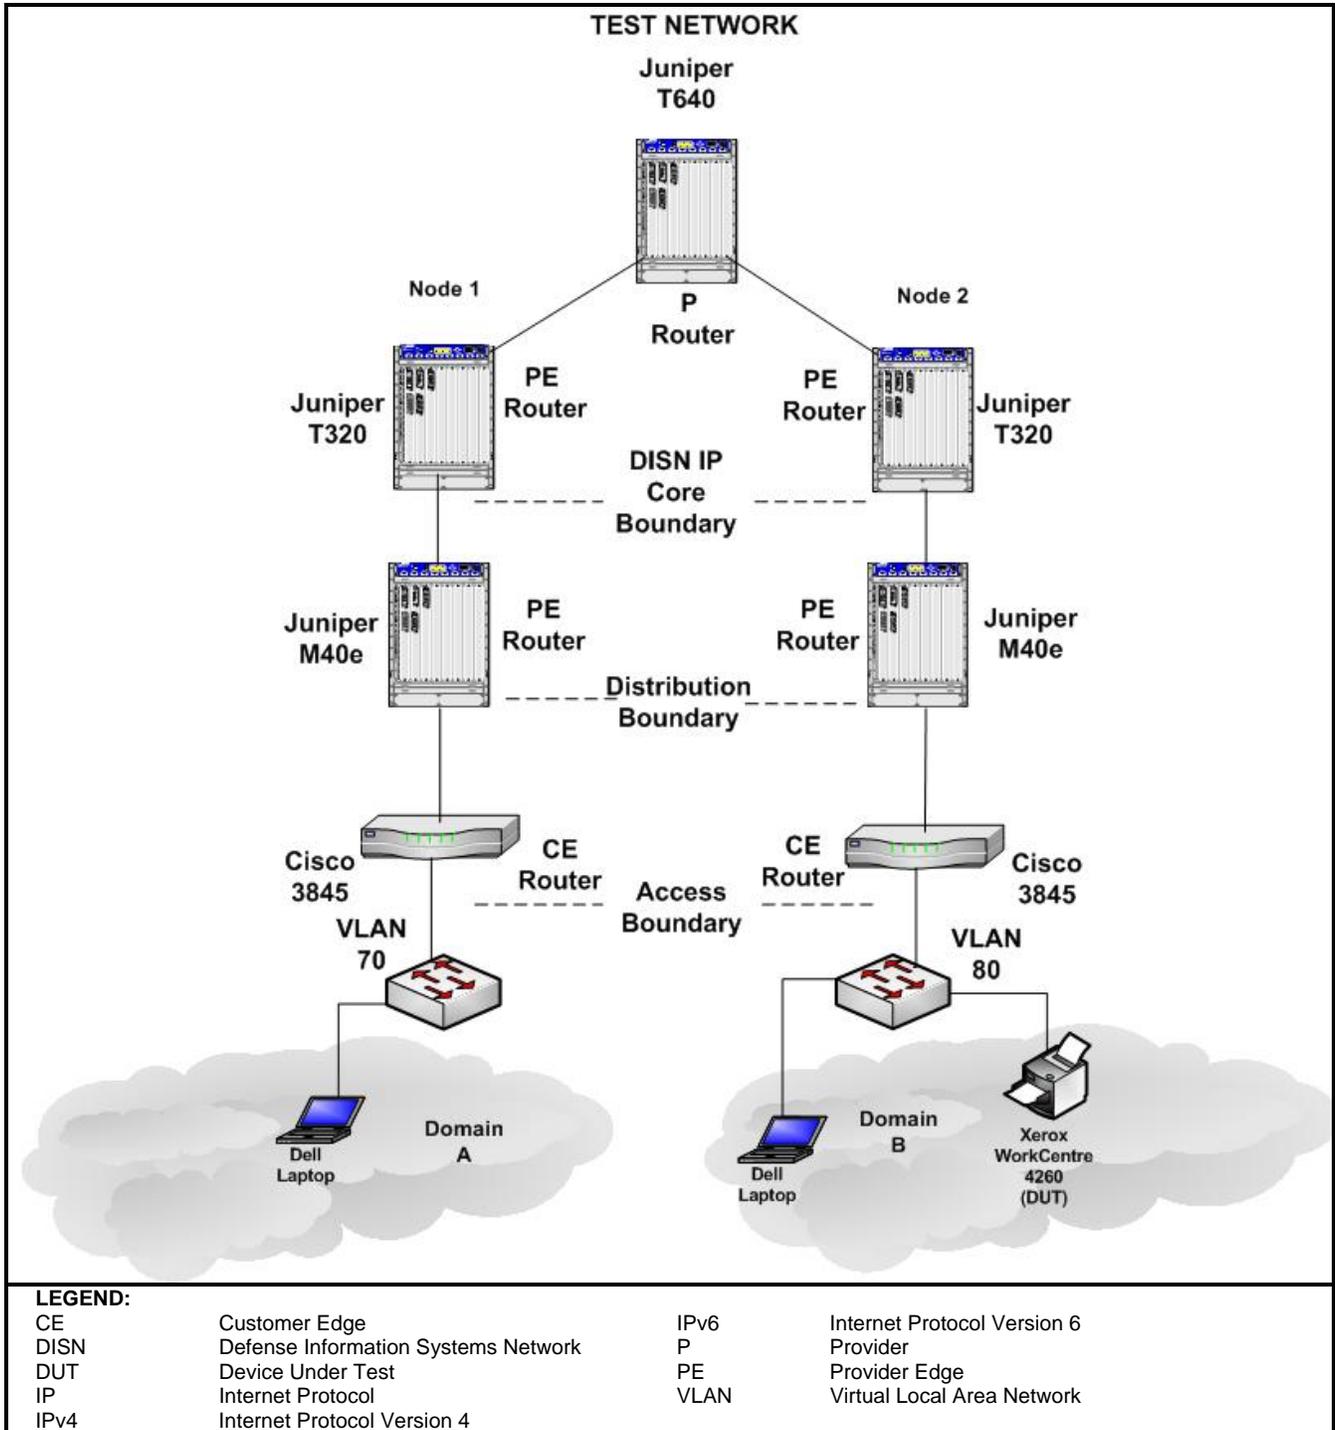

**Figure 2-2. Xerox Test Network**

**9. DEVICE CONFIGURATIONS.** Table 2-2 provides hardware and software components used in the Xerox test network.

**Table 2-2. Xerox Test Configuration Hardware and Software**

Equipment Name	Model Number	IOS/OS/Version(s)	
<b>Hardware</b>			
Xerox Office MFD/Printer - DUT	WorkCentre 4260	XIPCSv6.6.3.P	
2 Cisco Routers	Cisco 3845	12.4(11)T	
2 Juniper Routers	Juniper M40e	V 7.6R3.6	
2 Juniper Routers	Juniper T320	V 7.5R4.4	
Juniper Router	Juniper T640	V 7.5R4.4	
2 Dell Laptops	C-600	Microsoft Windows XP Professional	
<b>Software</b>			
Microsoft Windows XP Professional	N/A	Build 5.1.2600 SP 2	
Wireshark	N/A	V 1.0.2 (SVN Rev 25698)	
<b>LEGEND:</b>			
DUT	Device Under Test	Rev	Revision
FTP	File Transfer Protocol	SP	Service Pack
IOS	Internetworking Operating System	SVN	Software Version Number
MFD	Multi-Function Device	T	New Technology
N/A	Not Applicable	V	Version
OS	Operating System	XIPCSv	Xerox Internet Protocol Core Software version
R	Release		

**10. TEST LIMITATIONS.** None.

**11. TEST RESULTS.**

**a. IPv6 Base.**

**Test Case C.1.2.** The Request for Comments (RFC) 2460 IPv6 Specification is the base specification of the IPv6 protocol. It specifies a number of parameters that enable successful completion of IPv6 traffic addressing and control. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.14.** The RFC 4443 Internet Control Message Protocol (ICMP) for the IPv6 specification identifies ICMP messages for the IPv6 protocol. It includes message format and identifies two types of messages: error and informational. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.3.** The RFC 2461 Neighbor Discovery for IPv6 specifies the neighbor discovery function that is similar to address resolution protocol in IP Version 4 (IPv4). It is necessary for implementing neighbor solicitations and neighbor advertisements within IPv6. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.4.** The RFC 2462 IPv6 Stateless Address Auto-configuration specifies how a host auto-configures its interfaces in IPv6. These steps include determining whether the source addressing should be stateless or stateful, whether the information obtained should be solely the address or include other information, and whether Duplicate Address Detection identifies duplicate addresses on the network, and then issues a new address accordingly. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.1.** The RFC 1981 Path Maximum Transmission Unit Discovery for IPv6 is necessary for proper IPv6 implementations. It acts as a mechanism to determine the maximum size of packets to traverse the network without fragmentation. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.13.** The RFC 4291 IPv6 Addressing Architecture defines the specifications for the addressing architecture of the IPv6 protocol. The definitions cover unicast addresses, anycast addresses, and multicast addresses. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.11.** The RFC 4007 IPv6 Scoped Address Architecture defines the nature and characteristics for the usage of IPv6 addresses of different scopes. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.12.** The RFC 4193 Unique Local IPv6 Unicast Addresses defines globally unique local addresses. Local IPv6 unicast addressing is intended to be used for local communications and is not expected to be routed to the Internet. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.8.** The RFC 2710 Multicast Listener Discovery (MLD) for IPv6 specifies the protocol used by an IPv6 router to discover the presence of multicast listeners (i.e., nodes wishing to receive multicast packets) on its directly attached links, and to discover specifically which multicast addresses are of interest to those neighboring nodes. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.10.** The RFC 3810 MLD Version 2 is used by IPv6 routers to discover the presence of multicast listeners on their directly attached links, and to discover specifically which multicast addresses are interests to those neighboring nodes. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.1.5.** The RFC 2464 Transmission of IPv6 Packets over Ethernet Networks specifies the frame format for transmission of IPv6 link-local addresses and statelessly auto-configured addresses on Ethernet networks. The Xerox WorkCentre 4260 met the test requirement.

**b. Transition Mechanisms.**

**Test Case C.3.18.** The RFC 4213 Transition Mechanisms for IPv6 Host and Routers specifies IPv4 co-existence mechanisms that can be implemented by IPv6 devices. The Xerox WorkCentre 4260 met the test requirement.

**c. Host.**

**Test Case C.3.12.** The RFC 3484 Default Address Selection IPv6 defines two algorithms, one for source address selection, and the other for destination address selection. Each algorithm specifies what the default behavior is for IPv6 implementation. The Xerox WorkCentre 4260 met the test requirement.

**Test Case C.3.13.** The RFC 3596 Domain Name System (DNS) Extensions to Support IPv6 defines the changes that need to be made to the DNS to support hosts running IPv6. The Xerox WorkCentre 4260 met the test requirement.

**d. Other.**

**Test Case Not Applicable.** The RFC 2616 Hypertext Transfer Protocol is an application level protocol used for distributed, collaborative, hypermedia information systems. The Xerox WorkCentre 4260 met the test requirement.

**e. Conclusion.** The Xerox WorkCentre 4260 met all the required RFCs.

**12. TEST AND ANALYSIS REPORT.** All test data is maintained in the Advanced IP Technology Capability and is available upon request. This certification is available on the Joint Interoperability Tool (JIT). The JIT homepage is <http://jit.fhu.disa.mil> (NIPRNet), or <http://199.208.204.125/> (SIPRNet). The JIT has links to JITC interoperability documents to provide the DoD community, including the warfighter in the field, easy access to the latest interoperability information. System interoperability status information is available via the JITC System Tracking Program (STP). The STP is accessible by .mil/.gov users on the NIPRNet at: <https://stp.fhu.disa.mil/>.